

Miniature Incandescent Indicators

FOR MOUNTING IN 1/16" CLEARANCE HOLE
FOR 2 TO 120V OPERATION



T-3 1/4
MINIATURE
BAYONET BASE

See lamp ratings
on page K.

Recognized under the component
program of Underwriters'
Laboratories Inc.

75W., 125V.



How to designate the three digit part number suffix (-XXX)

FINISH	RESISTOR	HARDWARE
1 - White nickel	0 - None	1 - Brass
2 - Black nickel		3 - Water-tight, on the face of the panel.
3 - Polished chrome		
4 - Satin chrome		


NOTE: The part numbers given in this catalog indicate **standard** indicator lights. The table above provides the standard and optional designations for **Finish** and **Hardware** where appropriate. Example: 95-1310-0931-203 (black nickel finish with water-tight construction).

Part numbers listed in this catalog designate products with **RED** lens. For ordering lens colors other than red, consult chart on page 2D.

MATERIALS AND FINISHES

- **Mounting Bushing and Lens Holder:** Standard—Brass, polished chrome. Optional—White nickel, black nickel or satin chrome finish.
- **Mounting Nut:** Brass, white nickel finish.
- **Internal-tooth Lockwasher:** Phosphor bronze, white nickel finish.
- **Terminals: Solder** —Brass, hot tinned with elongated slot.
Screw—Brass, white nickel finish.
Quick Connect—Brass, tinned. Mate with standard female receptacles.

These assemblies also accommodate T-3 bulbs with miniature bayonet base, incandescent—in voltages from 6-120V. When lamps rated 2 watts or over are used, lens caps of high temperature plastic are required. Contact the factory for additional data and correct catalog number designations.

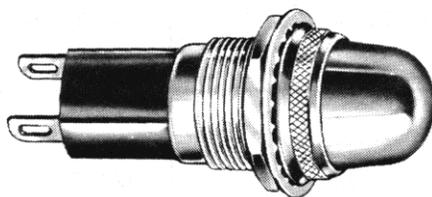

26-0410-1111-301
Screw-in lens cap

26 SERIES

BASE PART NUMBERS

WITH SCREW-IN LENS CAPS

	solder terminals	screw terminals	quick connect terminals
	26-0410-11-301	26-1310-11-301	26-5710-11-301
CAP PART NUMBERS	COMPLETE ASSEMBLY PART NUMBERS		
<p>STOVEPIPE</p>			
26-1131-300 transparent	26-0410-1131-301	26-1310-1131-301	26-5710-1131-301
26-1191-300 internal fluting	26-0410-1191-301	26-1310-1191-301	26-5710-1191-301
26-1111-300 back frosted	26-0410-1111-301	26-1310-1111-301	26-5710-1111-301

These assemblies should be specified when lamps rated over 2 watts are used.

Part numbers shown in gray are normally in inventory at your Dialight Distributor.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamp Lenses](#) category:

Click to view products by [Dialight](#) manufacturer:

Other Similar products are found below :

[812-0974](#) [140-1475-003](#) [151-2900-200](#) [199-5261](#) [221-1131-203](#) [222-0113-303](#) [222-0135-203](#) [270-0121](#) [221-1132-203](#) [222-0135-303](#)
[22872.9](#) [39-02-4A](#) [39-02-6A](#) [39-08-3A](#) [39-08-4A](#) [39-12-1A](#) [D38999/20ZA98SA](#) [359-8430-0932-502-327](#) [39-02-3A](#) [39-12-2A](#) [39-12-7B](#)
[402-0172-100](#) [402-0175-100](#) [053-0992](#) [053-0993](#) [053-0994](#) [091-0931](#) [091-0971](#) [091-0932](#) [101-0974](#) [103-1233-403](#) [533-0001](#) [533-0601](#)
[534-0701-537](#) [270-0212](#) [359-8430-0932-502](#) [0190535300](#) [0510113303](#) [39-06-2A](#) [199-5263](#) [241-0001-804](#) [830-1432-003](#) [39-08-7A](#) [271-](#)
[0171](#) [047-2900-400](#) [39-04-4B](#) [1813/8](#) [R14-13](#) [BF2.4/RC](#) [128-0931-003](#) [FCP-M1-XPE1-HRF](#)