


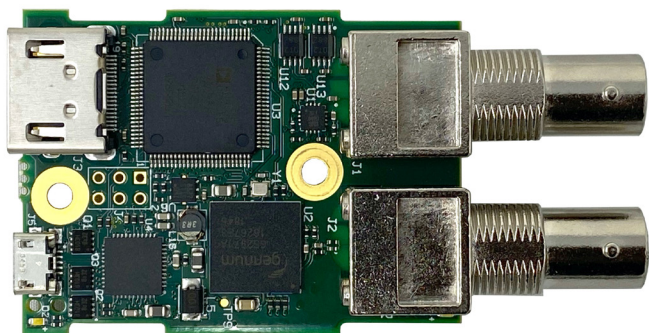

HD-1000P 3G/HD-SDI Video Add-on

The HD-1000P is an accessory add-on board for Digital View LCD controller boards. It converts a standard HD-SDI video signal to HDMI for the LCD controller board.

Key features:

- 3G/HD-SDI video input
- HDMI video output
- HD-SDI pass-through output
- Compact
- HD-1000P board: 416008100-3
- Kit 95000-3 (see details in Product Ordering below)

Specification

Input:

1 x BNC 3G/HD-SDI video input, up to 1080p/60

Output:

1 x HDMI
1 x BNC 3G/HD-SDI loop-through

SDI Standards:

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, SMPTE 425M

Color:

Color Space: YUV and RGB
Color level: 4:2:2

Power:


DC 5.0VDC, 1.6W, micro USB connector - from LCD controller

Dimensions:

PCBA: 54mm x 40.1mm x 14.8mmH(max)

Environmental:

Operating Temperature & Humidity 0°C to 50°C, 0% - 90% RH

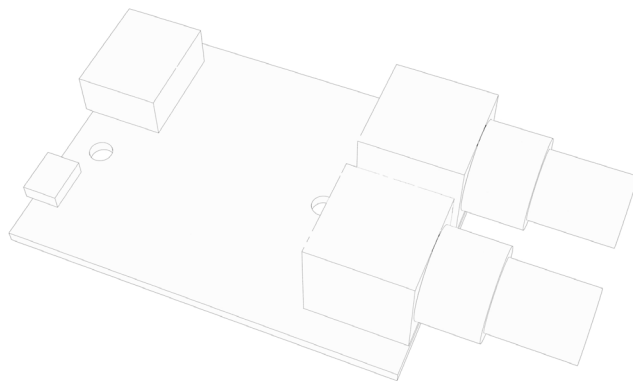

Product Ordering

HD-1000P part number: 416008100-3

Kit 95000-3, includes:

- HD-1000P board: 416008100-3
- HDMI cable : 426006600-3 (header type, 300mm)
- Power cable: 426321400-3 (HD-1000P to LCD controller, 600mm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Display Development Tools](#) category:

Click to view products by [Digital View](#) manufacturer:

Other Similar products are found below :

[TW8819-NA2-CR-EVAL](#) [LCD-16396](#) [KIT-19297](#) [EA 9781-2USB](#) [1.54inch e-Paper](#) [1.02inch e-Paper](#) [LPU4CG031B](#) [MCIMX-LVDS1](#)
[MIKROE-2453](#) [BREAK OUT BOARD 20](#) [BREAK OUT BOARD 36](#) [131](#) [LCD8000-43T](#) [DEV-13628](#) [1590](#) [1673](#) [1770](#) [1947](#) [1987](#) [KIT](#)
[60125-3](#) [KIT 67110-3](#) [2050](#) [2218](#) [2219](#) [2260](#) [2345](#) [2423](#) [2454](#) [2478](#) [2674](#) [SK-220RD-PI](#) [1811](#) [SK-GEN4-50DCT-CLB-SB-AR](#) [3130](#)
[MIKROE-2659](#) [3163](#) [FIT0477](#) [P0075](#) [333](#) [1774](#) [DFR0486](#) [334](#) [NHD-TFT40](#) [DFR0260](#) [DFR0428](#) [338](#) [FIT0478](#) [cs-paperino-01](#) [1776](#)
[ASD2421-R](#)