

Filter Fan (24...630)m³/h and Exhaust Filter



Drying kilns



Textile machines



Machines for paper processing



Machines for ceramics



Woodprocessing machines



Panels for electrical distribution



Control panels



Forced-air ventilators






Filter Fan for electrical cabinets and enclosures 120 V or 230 V AC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 120 or 230 V AC (50/60 Hz)
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Filter Fan supplied in Reverse flow mode (7F.21)
- Black colour RAL 9004 Available











- Nominal voltage 120 or 230 V AC
- Air volume 50/60 Hz: 24/29 m³/h
- Size 1





- Air volume 50/60 Hz: 55/63 m³/h

• Nominal voltage

120 or 230 V AC

• Size 2

- Nominal voltage 120 or 230 V AC
- Air volume 50/60 Hz: 100/115 m³/h

7F.20.8.xxx.3100

• Size 3

For outline drawing se	ee page 14
Tor outline drawing se	e page i i

Fan data							
Air volume (free flow): 50/60 Hz	m³/h	24/29		55/63		100/115	
Air volume (with exhaust filter in	stalled):						
50/60 Hz	m³/h	14/	16.5	40/-	45.5	75/85.5	
Noise level	dB (A)	2	7	4	2	42	
Life time at 40 °C	h	500	000	500	000	50000	
Electrical data							
Nominal voltage (U _N)	V AC (50/60 Hz)	120	230	120	230	120	230
Operating range	AC	(01	.1)U _N	(0.8	1.1)U _N	(0.8	1.1)U _N
Current consumption: 50/60 Hz	Α	0.23/0.18	0.1/0.08	0.25/0.21	0.13/0.11	0.25/0.21	0.13/0.11
Rated power: 50/60 Hz	w	27/21	23/18	30/25	29/25	30/25	29/25
Other data							
Housing, cover		Plastics according to UL94 V-0					
Filter mat (included)			G3 acco	rding to EN 779, f	iltering degree (8	090)%	
Filter material		Synth	•	9		re resistant to +10	00 °C,
			se	<u> </u>	Class F1 (DIN 5343	38)	
Electrical connections				Push-in t	terminals		
Wire size (mm²)	min/max			0.7	/2.5		
Wire size (AWG)	min/max	18/14					
Ambient temperature range	°C	-15+55					
Protection category according to	EN 60529	IP 54					
Protection category according to	NEMA	Type 12					
Approvals (according to type)		eu∰، _{SU} ZP ₂][H] ∋)					

Filter Fan for electrical cabinets and enclosures 120 V or 230 V AC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 120 or 230 V AC (50/60 Hz)
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Filter Fan supplied in Reverse flow mode (7F.21)
- Black colour RAL 9004 Available







- Nominal voltage 120 or 230 V AC
- Air volume 50/60 Hz. 250/295 m³/h
- Size 4

- Nominal voltage 120 or 230 V AC
- Air volume 50/60 Hz: 400/445 m³/h
- Size 4

For outline drawing see page 15

Fan data					
Air volume (free flow): 50/60 Hz	m³/h	250,	/295	400/445	
Air volume (with exhaust filter ins	· · · · · · · · · · · · · · · · · · ·				
50/60 Hz	m³/h	195,	/228	270/	300
Noise level	dB (A)	5	6	7.	2
Life time at 40 °C	h	500	000	500	000
Electrical data					
Nominal voltage (U _N)	V AC (50/60 Hz)	120	230	120	230
Operating range	AC	(0.8	1.1)U _N	(0.8	1.1)U _N
Current consumption: 50/60 Hz	Α	0.35/0.40	0.2/0.22	0.6/1	0.3/0.49
Rated power: 50/60 Hz	w	42/48	46/50	72/120	69/112
Other data					
Housing, cover			Plastics accord	ing to UL94 V-0	
Filter mat (included) G3			rding to EN 779, f	iltering degree (80	090)%
Filter material		,	1 3	ve construction, t	
		resistant to +	-100 °C, self extin	guishing, Class F1	(DIN 53438)
Electrical connections		Push-in terminals			
Wire size (mm²)	min/max		0.7	/2.5	
Wire size (AWG)	min/max		18,	/14	
Ambient temperature range	°C	-15+55			
Protection category according to	EN 60529	IP 54			
Protection category according to	NEMA	Type 12			
Approvals (according to type)		C€ ERI	C FU ®US		

Filter Fan for electrical cabinets and enclosures 120 V or 230 V AC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 120 or 230 V AC (50/60 Hz)
- Time-saving installation and maintenance
- Further available versions*:
- EMC Filter Fan (7F.70) and EMC Exhaust Filter (7F.07)
- Filter Fan supplied in Reverse flow mode
- * Product codes, see pages 8 & 11

7F.50.8.xxx.5500



- Nominal voltage 120 or 230 V AC
- Air volume 500 m³/h
- Rated power 70 W
- Size 5

7F.50.8.xxx.5630



- Nominal voltage 120 or 230 V AC
- Air volume 630 m³/h
- Rated power 130 W
- Size 5

Note:

By reversing the fan motor, the air direction can be changed from "Inlet" Filter Fan mode to "Exhaust" Filter Fan mode** (except for the types 7F.50.8.xxx.4370, 7F.50.8.xxx.5500 and 7F.50.8.xxx.5630).

** Supplied in "Inlet" Filter Fan mode (Standard).

For outline drawing see page 15

Fan data					
Air volume (free flow) m³/h		500		630	
Air volume (with exhaust filter ins	talled) m³/h	3	70	47	70
Noise level	dB (A)	6	55	72	
Life time at 40 °C	h	50	000	500	000
Electrical data					
Nominal voltage (U _N)	V AC (50/60 Hz)	120	230	120	230
Operating range	AC	$(0.81.1)U_N$ $(0.81.1)U_N$		1.1)U _N	
Current consumption	Α	0.8	0.4	1.10	0.55
Rated power	W	70	70	130	130
Other data					
Housing, cover	Plastics according to UL94 V-0, light grey (RAL 7035)			AL 7035)	
Filter mat (included)		G3 according to EN 779, filtering degree (8090)%			
Filter material		Synthetic fibre with progressive construction, temperature resistant to +100 °C, self extinguishing, Class F1 (DIN 53438)			
Electrical connections/wire size			screw terminals	s / max. 2.5 mm ²	
Screw torque	Nm	0.8			
Ambient temperature range	°C	-10+70			
Protection category according to EN 60529		IP 54			
Approvals (according to type)		C€ ERI	C FN ® _{US}		

Filter Fan for electrical cabinets and enclosures 24 V DC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 24 V DC
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Filter Fan supplied in Reverse flow mode (7F.21)
- Black colour RAL 9004 Available



7F.20.9.024.1020

- Nominal voltage 24 V DC
- Air volume 24 m³/h
- Rated power 3.6 W
- Size 1



7F.20.9.024.2055

- Nominal voltage 24 V DC
- Air volume 55 m³/h
- Rated power 7 W
- Size 2



- Nominal voltage 24 V DC
- Air volume 100 m³/h
- Rated power 7 W
- Size 3

For outline drawi	ng see page 14
-------------------	----------------

For outline drawing see page 14					
Fan data					
Air volume (free flow)	m³/h	24	55	100	
Air volume (with exhaust filter installed) m³/h	14	40	75	
Noise level	dB (A)	37.5	46	45	
Life time at 40 °C	h	50000	50000	50000	
Electrical data					
Nominal voltage (U _N)	V DC	24	24	24	
Operating range	DC	(0.81.1)U _N	(0.81.1)U _N	(0.81.1)U _N	
Current consumption	Α	0.15	0.32	0.32	
Rated power	w	3.6	7	7	
Other data					
Housing, cover			Plastics according to UL94 V-0		
Filter mat (included)		G3 acco	ording to EN 779, filtering degree (8	090)%	
Filter material		Synthetic fibre with progressiv	re construction, temperature resista Class F1 (DIN 53438)	ant to 100 °C, self extinguishing,	
Electrical connections			Push-in terminals		
Wire size (mm²)	min/max		0.7/2.5		
Wire size (AWG)	min/max		18/14		
Ambient temperature range	°C	-15+55			
Protection category according to EN 60	529	IP 54			
Protection category according to NEMA		Type 12			
Approvals (according to type)			CE [A] SUS ON SUS		

Filter Fan for electrical cabinets and enclosures 24 V DC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 24 V DC
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Filter Fan supplied in Reverse flow mode (7F.21)
- Black colour RAL 9004 Available



- Nominal voltage 24 V DC
- Air volume 250 m³/h
- Rated power 43 W
- Size 4


For outline drawing see page 15

For outline drawing see page 15		
Fan data		
Air volume (free flow)	m³/h	250
Air volume (with exhaust filter installed	m ³ /h	195
Noise level	dB (A)	64
Life time at 40 $^{\circ}\text{C}$	h	50000
Electrical data		
Nominal voltage (U _N)	V DC	24
Operating range	DC	(0.81.1)U _N
Current consumption	Α	1.8
Rated power	W	43
Other data		
Housing, cover		Plastics according to UL94 V-0
Filter mat (included)		G3 according to EN 779, filtering degree (8090)%
Filter material		Synthetic fibre with progressive construction, temperature resistant to 100 °C, self extinguishing, Class F1 (DIN 53438)
Electrical connections		Push-in terminals
Wire size (mm²)	min/max	0.7/2.5
Wire size (AWG)	min/max	18/14
Ambient temperature range	°C	−15+55
Protection category according to EN 60	529	IP 54
Protection category according to NEMA	,	Type 12
Approvals (according to type)		C€ [H[c 71 °us



Ordering information

 $Example: Series\ 7F, Filter\ Fan\ for\ mounting\ in\ sidewalls, nominal\ voltage\ 230\ V\ AC,\ size\ 1,\ air\ volume\ 24\ m^3/h.$

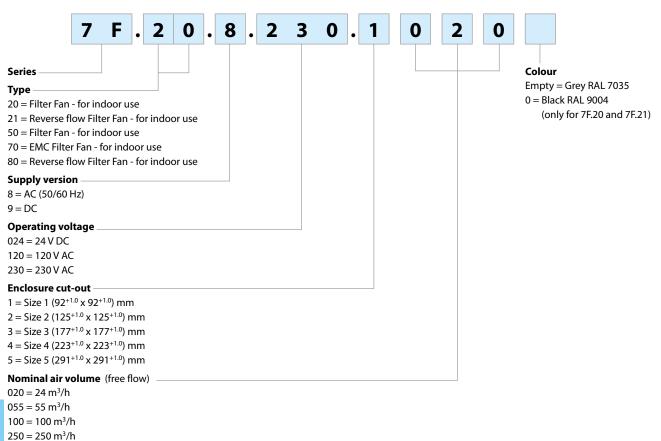

Filter Fans - All versions

 $400 = 400 \text{ m}^3/\text{h}$ $500 = 500 \text{ m}^3/\text{h}$ $630 = 630 \text{ m}^3/\text{h}$

Standard versions	EMC versions	Reverse flow versions	
7F.20.8.120.1020	_	7F.21.8.120.1020	Filter Fan, Size 1
7F.20.8.120.2055	_	7F.21.8.120.2055	Filter Fan, Size 2
7F.20.8.120.3100	_	7F.21.8.120.3100	Filter Fan, Size 3
7F.20.8.120.4250	_	7F.21.8.120.4250	Filter Fan, Size 4
7F.20.8.120.4400	_	7F.21.8.120.4400	Filter Fan, Size 4
7F.50.8.120.5500	_	7F.80.8.120.5500	Filter Fan, Size 5
7F.50.8.120.5630	_	_	Filter Fan, Size 5
7F.20.8.230.1020	_	7F.21.8.230.1020	Filter Fan, Size 1
7F.20.8.230.2055	_	7F.21.8.230.2055	Filter Fan, Size 2
7F.20.8.230.3100	_	7F.21.8.230.3100	Filter Fan, Size 3
7F.20.8.230.4250	_	7F.21.8.230.4250	Filter Fan, Size 4
7F.20.8.230.4400	_	7F.21.8.230.4400	Filter Fan, Size 4
7F.50.8.230.5500	7F.70.8.230.5500	7F.80.8.230.5500	Filter Fan, Size 5
7F.50.8.230.5630	7F.70.8.230.5630	_	Filter Fan, Size 5
7F.20.9.024.1020	_	7F.21.9.024.1020	Filter Fan, Size 1
7F.20.9.024.2055	_	7F.21.9.024.2055	Filter Fan, Size 2
7F.20.9.024.3100	_	7F.21.9.024.3100	Filter Fan, Size 3
7F.20.9.024.4250	_	7F.21.9.024.4250	Filter Fan, Size 4

Note:

The technical features (air volume, dimensions and electrical parameters) for the Standard Filter Fans (7F.20 and 7F.50), the EMC Filter Fans (7F.70) and the Reverse flow versions (7F.21 and 7F.80) - are exactly the same.

7F.50.8.120.5630 has no UL approval. Other versions on request.




Exhaust Filter

The size of the Exhaust Filter should match the size of the Filter Fan to achieve the best ventilation within the cabinet

- Minimum depth within enclosure
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Black colour RAL 9004 Available







• For Filter Fans

• Size 1

7F.20.x.xxx.1020

• For Filter Fans 7F.20.x.xxx.2055

7F.02.0.000.2000

• Size 2



7F.02.0.000.3000



- For Filter Fans 7F.20.x.xxx.3100
- Size 3

For outline drawing see page 14				
Other data				
Housing, cover	Plastics according to UL94 V-0			
Filter mat (included)	G3 according to EN 779, filtering degree (8090)%			
Filter material	Synthetic fibre with progressive construction, temperature resistant to +100 °C, self extinguishing, Class F1 (DIN 53438)			
Protection category according to EN 60529	IP 54			
Protection category according to NEMA	Type 12			
Approvals (according to type)	C€ [H[c 91 0s			

7F SERIES Exhaust Filter



Exhaust Filter

The size of the Exhaust Filter should match the size of the Filter Fan to achieve the best ventilation within the cabinet

- Minimum depth within enclosure
- Time-saving installation and maintenance
- EMC Exhaust Filters (7F.07 only for 7F.05)
- Easily replaceable filter mat (7F.02)
- Black colour RAL 9004 Available (only for 7F.02)



7F.02.0.000.4000



- For Filter Fans 7F.20.x.xxx.4250 or 7F.20.8.xxx.4400
- Size 4

7F.05.0.000.5000



- For Filter Fans 7F.50.8.xxx.5500 or 7F.50.8.xxx.5630
- Size 5


For outline drawing see page 15

Other data	
Housing, cover	Plastics according to UL94 V-0, light grey (RAL 7035)
Filter mat (included)	G3 according to EN 779, filtering degree (8090)%
Filter material	Synthetic fibre with progressive construction, temperature resistant to +100 °C, self extinguishing, Class F1 (DIN 53438)
Protection category according to EN 60529	IP 54
Protection category according to NEMA	Type 12
Approvals (according to type)	C€ [A[c 71 0°us



Ordering information

Example: Series 7F, Exhaust Filter for mounting in sidewalls, size 1.

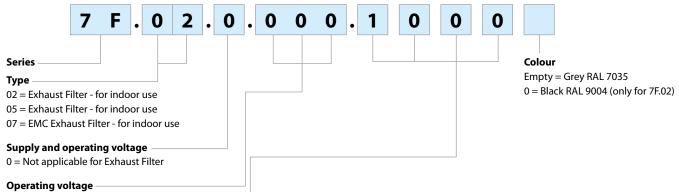

000 = Not applicable for Exhaust Filter

Enclosure cut-out

 $1000 = \text{Size } 1 (92^{+1.0} \times 92^{+1.0}) \text{ mm}$

 $2000 = \text{Size } 2 (125^{+1.0} \times 125^{+1.0}) \text{ mm}$

 $3000 = \text{Size } 3 (177^{+1.0} \times 177^{+1.0}) \text{ mm}$

 $4000 = \text{Size 4} (223^{+1.0} \times 223^{+1.0}) \text{ mm}$

 $5000 = \text{Size } 5 (291^{+1.0} \text{ x } 291^{+1.0}) \text{ mm}$

Exhaust Filter - All versions					
EMC - versions					
_	Exhaust Filter, Size 1				
_	Exhaust Filter, Size 2				
_	Exhaust Filter, Size 3				
_	Exhaust Filter, Size 4				
7F.07.0.000.5000	Exhaust Filter, Size 5				

Components

Standard-Filter Fan	Standard-Exhaust Filter	EMC-Filter Fan	EMC-Exhaust Filter	Filter mat	Size
7F.20.8.xxx.1020	7F.02.0.000.1000	_	_	07F.15	1
7F.20.8.xxx.2055	7F.02.0.000.2000	_	_	07F.25	2
7F.20.8.xxx.3100	7F.02.0.000.3000	_	_	07F.35	3
7F.20.8.xxx.4250	7F.02.0.000.4000	_	_	07F.45	4
7F.20.8.xxx.4400	7F.02.0.000.4000	_	_	07F.45	4
7F.50.8.xxx.5500	7F.05.0.000.5000	7F.70.8.230.5500	7F.07.0.000.5000	07F.55	5
7F.50.8.xxx.5630	7F.05.0.000.5000	7F.70.8.230.5630	7F.07.0.000.5000	07F.55	5
7F.20.9.024.1020	7F.02.0.000.1000	_	_	07F.15	1
7F.20.9.024.2055	7F.02.0.000.2000	_	_	07F.25	2
7F.20.9.024.3100	7F.02.0.000.3000	_	_	07F.35	3
7F.20.9.024.4250	7F.02.0.000.4000	_	_	07F.45	4

Spare Filter mats	07F.15	07F.25	07F.35	07F.45	07F.55
Protection category			IP54		


Accessories





07F.80

Pressure compensation device, for pressure compensation		07F.80	
in closed cabinets or enclosures		071.00	
Air interface area	cm ²	7	
Mounting		PG 29 thread with union nut	
Torque	Nm	5 (max. 10)	
Material		plastic according to UL94-V0	
Dimensions (diameter/depth)	mm	65.5/30.5	
Mounting position		upper part of cabinet sidewalls	
Ambient temperature	°C	-45+70	
Protection category		IP 55	





Unit package contains 2 pressure compensation devices



Mounting instructions for Filter Fans

Mounting arrangement of Filter Fans and Exhaust Filter

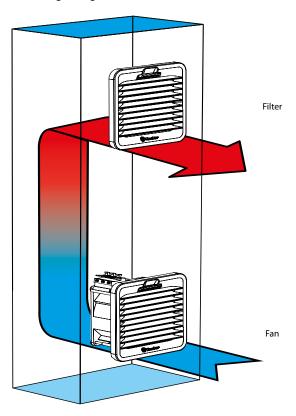

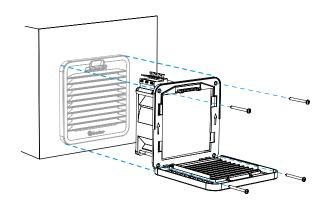


The installation with the only clips is optimized for 1.5 mm thick sheets; it is also possible with thicknesses from 1 to 2.5 mm.

Fixing with screws (supplied) is recommended.

Tightening torque 0.3 Nm.


Replacement of Filter mat (Type 7F.20)

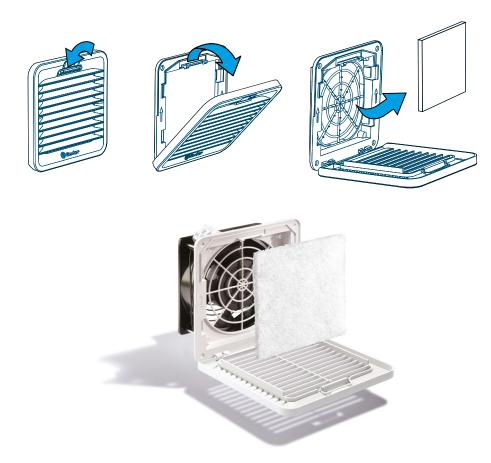





Drilling template and mounting cut-outs for Filter Fans and Exhaust Filter

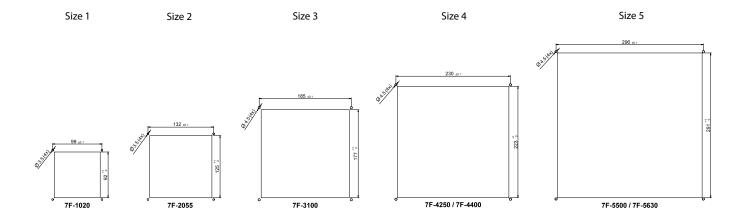

Mounting and maintenance

- 1. Make the panel cut-out according to the size of the Filter Fan or Exhaust Filter in the sidewall of the cabinet as appropriate. A template of the panel cut-out is included in the packaging of the Filter Fan or Exhaust Filter.
- 2. Make the electrical connection.
- 3. Mount by simply snapping the side-located lugs on the Filter Fan or Exhaust Filter into the panel cut-out (without using screws for sidewall thickness of 1.2...2.4 mm).
 - At other thickness it is recommended to mount the Filter Fan by the screws supplied (for size 1, the template shows the mounting cut-out only).
- 4. When screws are needed for the mounting, remove the plastic cover and fix the Filter Fan with the 4 screws supplied. Then insert the filter mat and snap the plastic cover to the mounting frame.
- $5. \ \ During\ maintenance\ or\ when\ replacing\ the\ filter\ mat\ remove\ the\ plastic\ cover,\ replace\ the\ filter\ mat\ and\ snap\ on\ the\ plastic\ cover.$





Outline drawings

Type 7F.20.x.xxx.1020


92 (B)(IIIxxXIssr-120

\$\frac{1}{80} \times \t


AC version

DC version


Type 7F.02.0.000.1000




Type 7F.20.x.xxx.2055

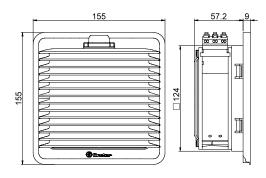


Type 7F.02.0.000.2000




Type 7F.20.x.xxx.3100

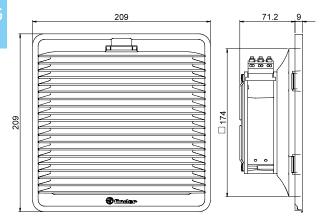


Type 7F.02.0.000.3000

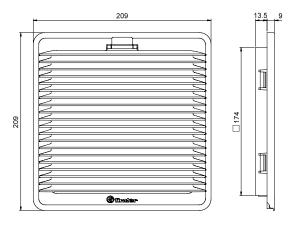

Type 7F.20.x.xxx.4250

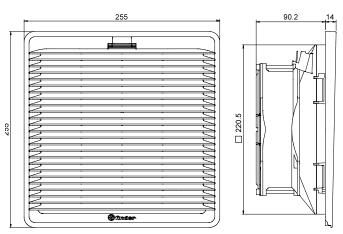

Type 7F.02.0.000.4000

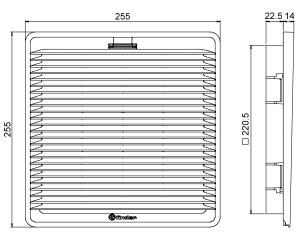


IV-2021, www.findernet.com


Type 7F.20.x.xxx.4400

255 130 □ 220.5 255


Type 7F.02.0.000.4000

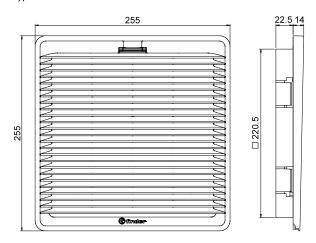


Type 7F.50.x.xxx.5500

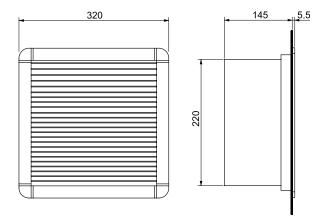


Type 7F.05.0.000.5000

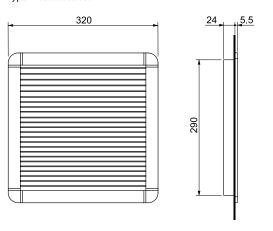

Type 7F.50.x.xxx.5630

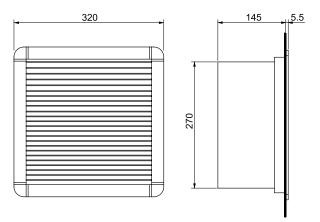


Type 7F.05.0.000.5000

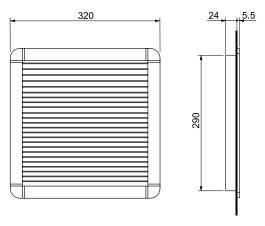



Fan selection

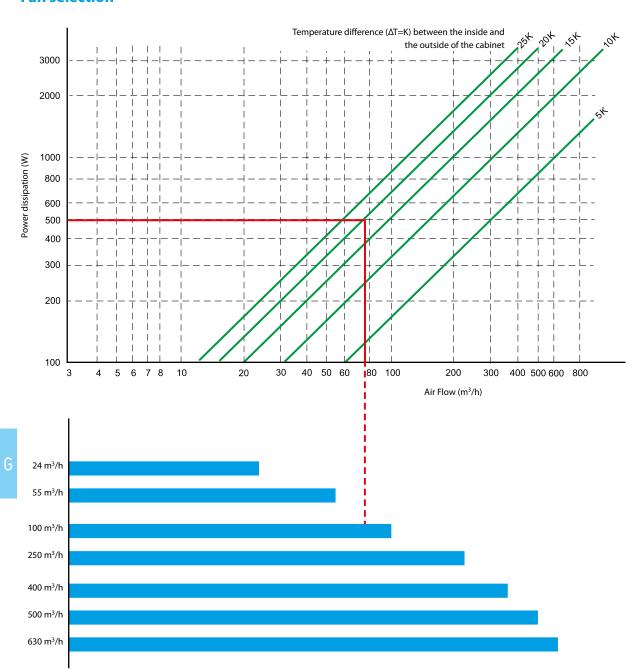

Example

First, estimate the power dissipated within the cabinet. Then calculate the maximum difference between the internal and external temperature (green lines) by considering the difference between the maximum permitted internal temperature (as dictated by the temperature rating of the enclosed components, or specification) and the maximum temperature expected outside the cabinet.

The projection onto the X axis, of the intersection between the power (watts) and the appropriate green line, corresponds to the air flow rate in m^3/h required to meet the maximum internal temperature limit. Extending this line vertically to intersect with the blue horizontal lines, indicates the most appropriate model of 7F fan to be fitted to the cabinet to provide the requisite air flow.

The example above considers a cabinet with an internal thermal power dissipation of 500 W, and assumes the maximum temperature difference between the inside and the outside of the cabinet to be 20K. The required air flow can be seen to be a little less than 80 m³/h.

It is suggested that this is increased by 10% to allow for the affects of a dirty filter.

And so, it can be seen that models of the 7F with 100 m³/h flow rate will provide the proper dissipation of heat under these circumstances.





Application notes

Filter Fan

The ball-bearing axial fan housing is made of aluminium and the rotor is made of plastic or metal (depending on the type).

Within EN 779 are specified 9 filter classes, categorised into 4 coarse dust filters und 5 fine dust filters.

The coarse dust filters G1 - G4 are able to filter particles > 10 µm and the fine dust filters G5 - G9 are able to filter particles from $(1...10)\mu m$.

Filter classes	Example of particle	Particle size
G1 - G4 (EU1 - EU4)	Textile fibers, hair, sand, pollen, spores, insects, cement dust	> 10 µm
G5 - G9 (EU5 - EU9)	Pollen, spores, cement dust, tobacco smoke, oil smoke, soot	(110)μm

Filtering degree (Am)

The degree of filtering (Am) is the percentages of dust, by weight, that is caught and retained by the filter.

Filter mats

The quality of these filters mats has been independently tested, according EN 779 and branded after passing the test.

The filter mats are to filter class G3 and have an average filtering degree of (80...90)%.

Filter material

The filter material consists of a synthetic fiber with progressive construction which is moisture-resistant to 100% RH and temperature resistant to

According to the strict requirements of fire class F1, DIN 53438, these filter mats are self extinguishing.

Progressive construction at filter mats

The individual fibers of these filter mats are bonded by a special process to provide a progressive construction where the fiber size and spacing varies through the thickness of the filter mat.

This means that coarse dust particles are caught early and fine dust later through the thickness of the mat. In this way the entire depth of the filter

Flammability class of the housing and the cover

The plastic materials used comply with flammability class V-0, according UL94.

EMC Filter Fans and EMC Exhaust Filters

The plastic mounting frame of the EMC Filter Fans (7F.70) and EMC Exhaust Filters (7F.07) are sprayed with a conductive (metallic) paint.

The gasket located on the mounting frame, for sealing the Filter Fan or Exhaust Filter in the cabinet is also metalised.

In addition; located at the EMC Filter Fan between the metalized mounting frame and the filter mat, is a metal grid.

Therefore, between the metal parts of the Filter Fan and the metal cabinet, there is a conductive connection.

Filter Fan in "reverse flow" version

As supplied, the standard Filter Fan is in "Draw-In"- mode, which means that cool air is filtered and drawn into the cabinet. In some cases it may be required that the warm air is blown out of the cabinet.

In which case it is possible to get Filter Fans in "Exhaust Filter" mode version (7F.21 and 7F.80).

Mounting of the pressure compensation device

In sealed cabinets and enclosures the internal pressure can vary due to changes in temperature. The pressure compensation device (07F.80) will relieve this internal/external pressure differential whilst maintaining a high level of protection - preventing the ingress of dust and moisture into the cabinet or the enclosure. The pressure compensation device is approved for use in cabinets and enclosures according to DIN EN 62208.

Drill a hole Ø $37^{+1.0}$ mm in the housing wall and fix the pressure compensation device with the accompanying nut. It is important to ensure that the sealing ring is located on the outside. To ensure optimum pressure balance, it is recommended to fit 2 pressure compensation device at the upper sides of the cabinet or enclosure.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for DC Fans category:

Click to view products by Finder manufacturer:

Other Similar products are found below:

AUB0612L AFB0948HH-S687 G2E085-AA05-10 4318/12T AUB0912H-F00 3412N/2ME W2G110-AM39-01 8412GLV 8412NGL-12 6448-384 4114N/17-251 4318/2R 4412F/2D 424JMU 4414/2HH 4112 N/12GL-175 9GA0924L4021 9GA0924M4021 9GA0924M4011 9GA0812A2D0011 9GA0912M4D011 9GA0924W4D01 9GA0912F4021 9GA0912F402 9GA0912H4D011 9GA0824L20021 9GA0824L20011 9GA0812A2D001 9GA0812B2D001 9GA0812L20021 9WP1248M1021 9GA0812A2D001 9GA0824L2D001 9GA0924W4D011 9GA0912W402 9GA0912M402 9GA0824B2D001 9GA0824A20021 9GA0912W4021 9GA0924W402 9GA0812L2D0011 9GA0812A2D001 9GA0824L2D001 9GA0824L2D001 9GA0812L2D001 9GA0812L2D001 9GA0824L2D001 9GA0812L2D001 9GA0812L2D001 9GA0824L2D001 9GA0824L2D001 9GA0824L2D001 9GA0812L2D001