




249-003 Conductive O-Ring for Mighty Mouse Jam Nut Receptacles

CONDUCTIVE O-RING FOR MIGHTY MOUSE JAM NUT RECEPTACLES

How To Order				
Sample Part Number	249-003	-801	-06	-B
Conductive O-Ring	for Mighty Mouse Jam Nut Receptacles			
Mighty Mouse Connector Series	-800, -801, -804, -805			
Shell Size	See Table I			
Material	See Table II			

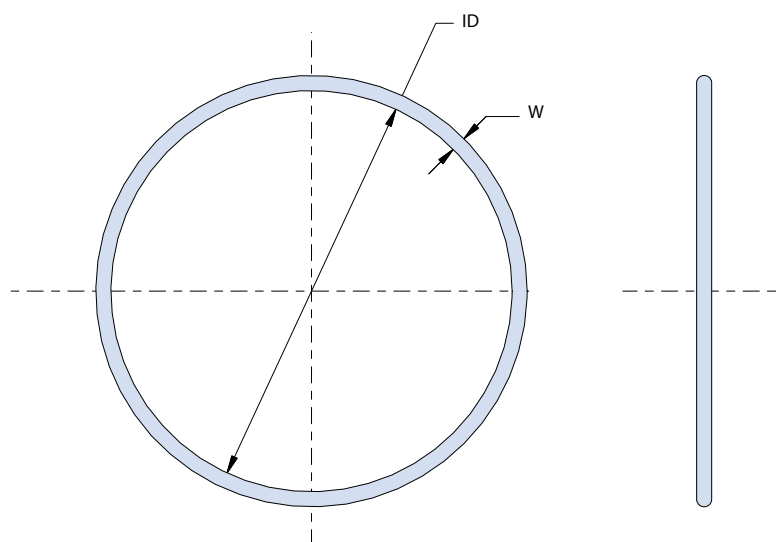

Notes

1. Parts to be packaged in bulk and identified by bag and tag.

Dimensions in inches (millimeters) and are subject to change without notice.

249-003
Conductive O-Ring
for Mighty Mouse Jam Nut Receptacles



Table I: Shell Size

Shell Size	800 Series O-Ring ID x W	801 Series O-Ring ID x W	804 Series O-Ring ID x W	805 Series O-Ring ID x W
-5	.364 X .045	.394 X .047	.505 X .070	
-6	.426 X .050	.459 X .049	.525 X .071	
-7	.489 X .055	.578 X .040	.638 X .073	
-8	.588 X .051	.578 X .040	.688 X .070	.578 X .040
-9	.614 X .070	.650 X .045	.750 X .070	.709 X .045
-10	.709 X .079	.709 X .043	.813 X .063	.709 X .045
-11				.780 X .047
-12	.801 X .070		.943 X .070	.894 X .047
-13		.894 X .047		
-14	.926 X .070		1.061 X .073	
-15	.989 X .070		1.114 X .070	1.024 X .047
-16		1.086 X .040		
-17		1.142 X .043		
-18				1.201 X .047
-19				1.257 X .047
-21		1.417 X .047		
-23				1.530 X .047

Table II: Material

Designator	Material
B	Silver Plated Aluminum Filled Silicone per MIL-DTL-83528, Type "B" (CHO-SEAL 1285 or equivalent)
C	Passivated Silver Plated Aluminum Filled Fluorosilicone per MIL-DTL-83528, Type "D" (CHO-SEAL 1298 or equivalent)
H	Silver Plated Copper Filled Silicone per MIL-DTL-83528, Type "A" (CHO-SEAL 1215 or equivalent)
X	Nickel Plated Aluminum Filled Silicone (Cho-Seal 6502 or equivalent)
Y	Nickel Plated Aluminum Filled fluorosilicone (Cho-Seal 6503 or equivalent)

Dimensions in inches (millimeters) and are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Tools, Hardware & Accessories](#) ***category:***

Click to view products by [Glenair](#) ***manufacturer:***

Other Similar products are found below :

[0113-201-2025](#) [6134-333-1990](#) [6134-334-1390](#) [6134-334-1590](#) [6134-334-2190](#) [6134-336-11149](#) [6134-336-19149](#) [6134-337-21149](#) [6134-340-1790](#) [6134-342-13149](#) [6134-342-19149](#) [M38999/9-19B](#) [630A007NF083A](#) [630B007M051A](#) [630BJ003NF032H](#) [M39029/29-215](#) [6408-203V-09273](#) [6408-203V-17343](#) [6426-201-11343](#) [650FS002NF16](#) [660-008NF14S7-01](#) [660-009M22H8-03](#) [660-012M25S6-02](#) [660-013NF19U6-210](#) [660-015M10S6-17](#) [660-015NF10S5-01](#) [660-015NF14R3.5-01](#) [660-068NF25R6-30G](#) [660-070M23S8-04](#) [660-073MTCH9-20](#) [M855282-10A01A](#) [M85528/2-22AA](#) [M855282-37A01](#) [G8994-14NF](#) [97-24-16S](#) [97-24-28P\(431\)](#) [97-28-11S\(431\)](#) [97-28-21S\(431\)](#) [97-3066-8](#) [1226-201-11228](#) [1226-201-15228](#) [1226-201-19228](#) [1226-201-23228](#) [1226-201-25192](#) [1226-201-25228](#) [121086-3191](#) [1214-202-1178](#) [1226-201-09228](#) [1226-201-13228](#) [1226-201-21192](#)