

ZTT 2.2x1.8 to 7.4x3.4 SMD PACKAGE

PRODUCT FEATURES

- Frequency Range: 2MHz~60MHz
- High stability and adjustment-free
- Small size and SMD Package
- With Built-in Capacitor
- RoHS compliant


PRODUCT PHOTO



PRODUCT SPECIFICATIONS


Part Number	Frequency Range (MHz)	Frequency Accuracy (25°C)(%)	Stability over Temperature (-25~+85°C)(%)	Operating Temperature (°C)	Aging for Ten Years (%)
HCTT1	2.00-8.00	±0.5	±0.3	-25~+85	±0.3
HCTT2	4.00-8.00	±0.5	±0.3	-25~+85	±0.3
HCTT3	8.00-12.00	±0.5	±0.3	-25~+85	±0.3
HCTT4	6.00-13.00	±0.5	±0.4	-25~+85	±0.3
HCTT5	8.00-13.00	±0.5	±0.4	-25~+85	±0.3
HCTT4	13.01-60.00	±0.5	±0.3	-25~+85	±0.3
HCTT5	16.00-60.00	±0.5	±0.3	-25~+85	±0.3
HCTT6	20.00-60.00	±0.5	±0.3	-25~+85	±0.3
HCTT7	24.00-60.00	±0.5	±0.3	-25~+85	±0.3
HCTT8	2.00-12.00	±0.5	±0.3	-25~+85	±0.3

PACKAGE OUTLINE / DIMENSIONS

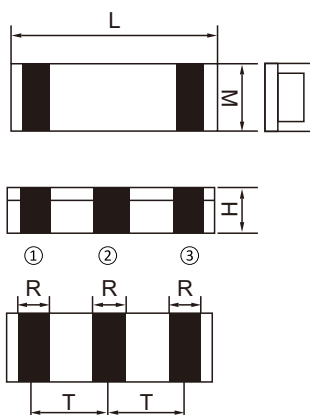

①INPUT ②GROUND ③OUTPUT

TEST CIRCUIT

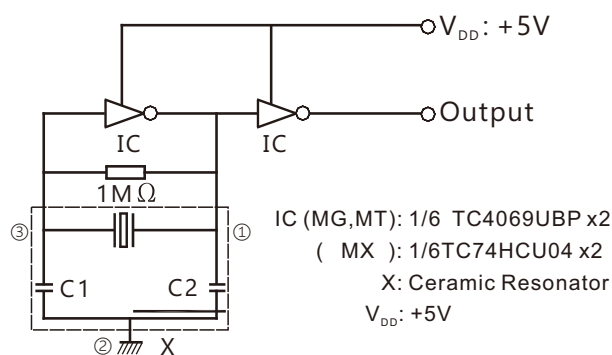

Part Number	Size(mm)					
	L	W	H	P1	P2	T
HCTT1	7.4±0.2	3.4±0.2	1.8±0.2	1.2±0.2	1.2±0.2	2.5±0.2
HCTT2	4.5±0.2	2.0±0.2	1.2max	0.8±0.2	0.8±0.2	1.5±0.2
HCTT3	3.2±0.2	1.3±0.2	1.0max	0.4±0.2	0.4±0.2	1.2±0.2
HCTT4	4.7±0.2	4.1±0.2	(1.2+A)±0.2	1.0±0.2	0.8±0.2	1.95±0.2
HCTT5	3.7±0.2	3.1±0.2	(1.0+A)±0.2	0.9±0.2	0.7±0.2	1.5±0.2
HCTT6	2.5±0.2	2.0±0.2	1.2max	0.5±0.2	0.4±0.2	1.0±0.2
HCTT7	2.2±0.2	1.8±0.2	1.2max	0.4±0.2	0.5±0.2	0.85±0.2
HCTT8	6.0±0.2	3.0±0.2	2.0max	1.2±0.2	1.2±0.2	2.5±0.2

Note: A stands for thickness of the ceramic element, which varies with the frequency. The range of the thickness difference is 0.1 to 0.7mm.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resonators](#) category:

Click to view products by [HCI](#) manufacturer:

Other Similar products are found below :

[B39431R820H210](#) [CSTNE16M0V510000R0](#) [CSTNE8M00GH5C060R0](#) [KZA20000](#) [KZA3580](#) [KZA107](#) [HCTB1-1.000-CRBHRL](#) [SF11S5-1582.400-F04IL02AL](#) [AWSZT-3.58CP-T4](#) [SF33M6-836.500-F25IL28AL](#) [HCTB1-460.000-CRBEL](#) [SF33M6-1960.000-F60IL25AL](#) [SRD11-315.000-F75IL22AL](#) [SF33M6-1575.420-F02IL40AL](#) [HCTB1-455.000-CRBEL](#) [KZA24000](#) [KZT6000](#) [KZA8000](#) [KZA169344](#) [KZT2350](#) [KZT169344](#) [KZT24000](#) [KF143392](#) [KZA4000](#) [KUM20950](#) [KZA16000](#) [KZT16000](#) [KZT4190](#) [KZA12000](#) [KZA3640](#) [KD143392](#) [KZA2000](#) [KZA5000](#) [KZT3640](#) [KZA6000](#) [KTOR3150](#) [KZT8000](#) [HCTT2-7.370-ZTTCRL](#) [HCTB1-432.000-CRBEL](#) [HCTT3-8.000-ZTTCE-33L](#) [HCTT8-4.000-ZTTCPL](#) [HCTT2-4.000-ZTTCRL](#) [HCTT3-12.000-ZTTCEL](#) [HCTT6-25.000-ZTTCWL](#) [HCTT8-4.910-ZTTCPL](#) [9AC04194152080D2JB](#) [CSTCR4M91G55B-R0](#) [CSTLS3M68G56-B0](#) [FC-12M32.768KHZ9PF20PPM](#) [7Y032768NW2](#)