



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
✓	3	RE-F-09671	K.N	H.Y	04.04.08	✓				
✓						✓				
✓						✓				

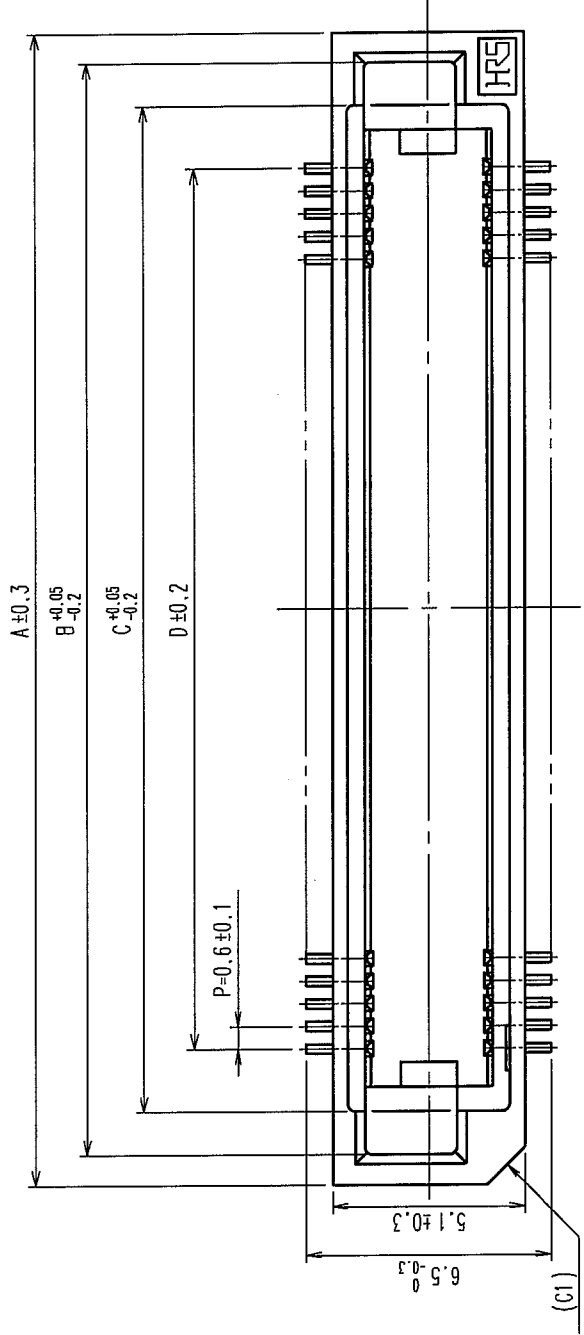


RECOMMENDED LAND PATTERN DIMENSION OF P.C.B. (MOUNTING SIDE)

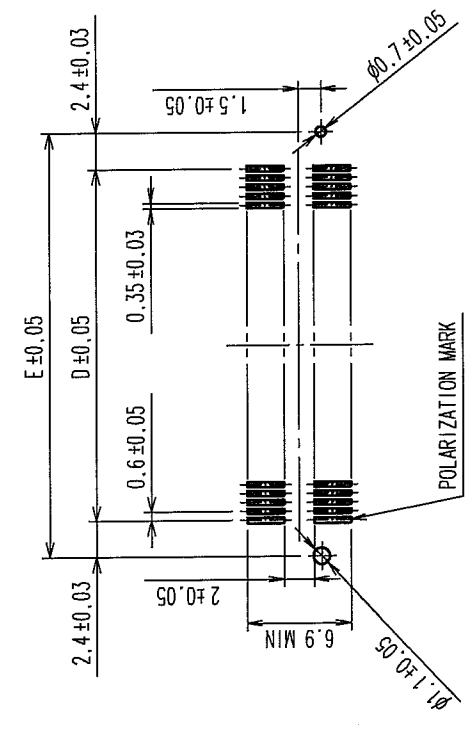

DIMENSION TABLE OF CONNECTOR AND P.C.B. LAND PATTERN.

PART No.	CODE No.	5	A	B	C	D	E
FX8C- 60P-SV4(92)	CL578-0581-8-92	60	24.60	23.00	20.70	17.40	22.20
FX8C- 80P-SV4(92)	CL578-0583-3-92	80	30.60	29.00	26.70	23.40	28.20
FX8C-100P-SV4(92)	CL578-0585-9-92	100	36.60	35.00	32.70	29.40	34.20
FX8C-120P-SV4(92)	CL578-0586-1-92	120	42.60	41.00	38.70	35.40	40.20
FX8C-140P-SV4(92)	CL578-0587-4-92	140	48.60	47.00	44.70	41.40	46.20

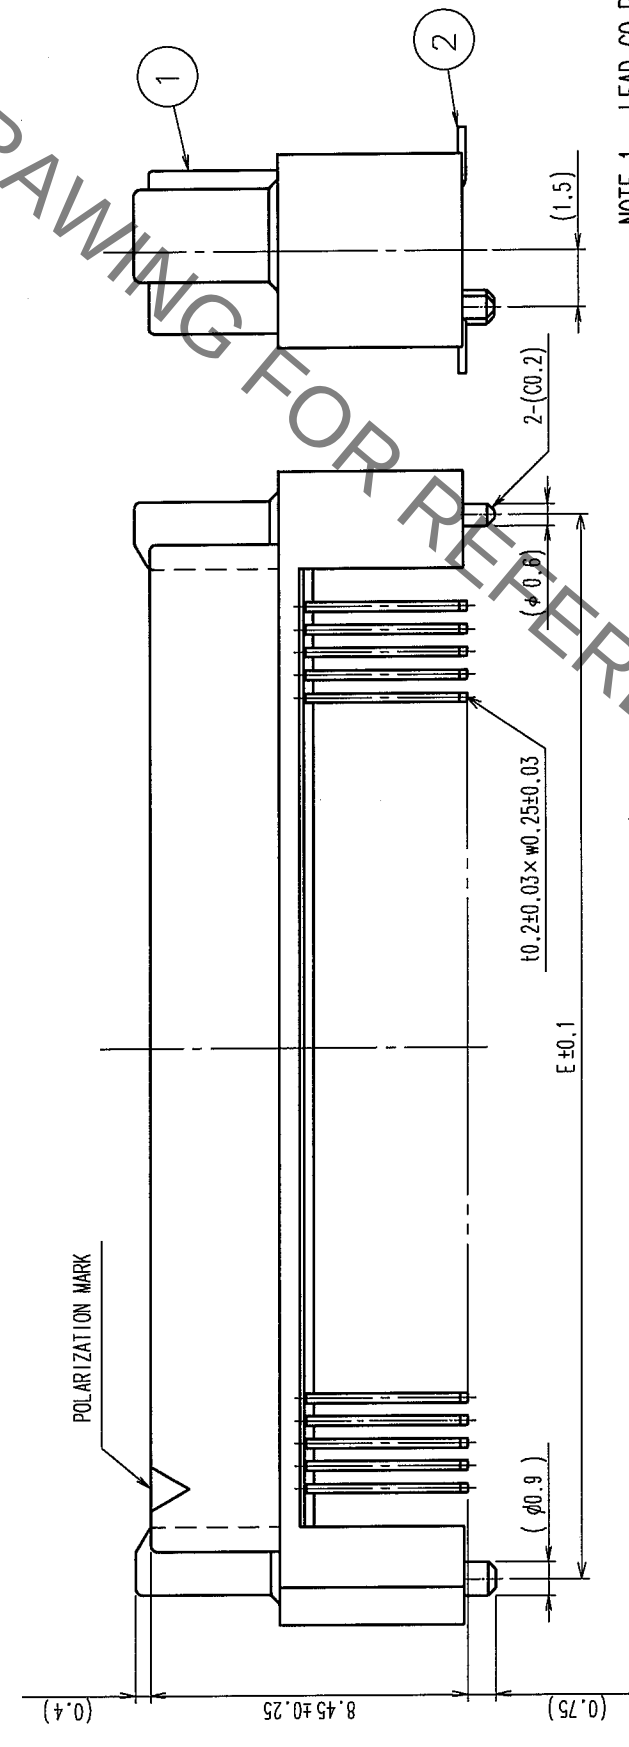

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
- SEE NEXT PAGE FOR DETAILS.
3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
- | | | |
|---|---|---------------------|
| 5 | > | NUMBER OF CONTACTS. |
|---|---|---------------------|

1	PPS	LIGHT BROWN (UL94V-0)		2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μ m min LEAD AREA: TIN-PLATING 1μ m min UNDER PLATING: NICKEL 1μ m min		
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)				DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL				S. SUZUKI	K. NAKAMURA	H. OKAWA	Y. YOSHIMURA	
			03.02.04	03.02.12	03.02.14	03.02.15		
DRAWING NO.		PART NO.		FX8C-**-P-SV4 (92)				
SCALE		EDC3-151089-22						
FREE								
UNITS		HIROSE ELECTRIC CO., LTD		CODE NO.				
mm		HRS		CL578				
				1/2				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) ***category:***

Click to view products by [Hirose](#) ***manufacturer:***

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68682-310LF](#) [68684-306](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [FCN-268M024-G/3D](#) [FCN-268M036-G/BD](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#) [AXE720127](#) [354184](#)