


Common Cathode Fast Recovery Epitaxial Diode (FRED)


DSEK 60

I_{FAVM} = 2x 34 A
V_{RRM} = 200 V
t_{rr} = 35 ns


V _{RSM} V	V _{RRM} V	Type
200	200	DSEK 60-02A
200	200	DSEK 60-02AR



TO-247 AD
Version A



ISOPLUS 247™
Version AR



A = Anode, C = Cathode

Symbol	Test Conditions	Maximum Ratings per leg	
I _{FRMS}	T _{VJ} = T _{VJM}	50	A
I _{FAVM} *	T _C = 115°C; rectangular, d = 0.5	34	A
I _{FRM}	t _p < 10 µs; rep. rating, pulse width limited by T _{VJM}	375	A
I _{FSM}	T _{VJ} = 45°C; t = 10 ms (50 Hz), sine	325	A
	t = 8.3 ms (60 Hz), sine	350	A
	T _{VJ} = 150°C; t = 10 ms (50 Hz), sine	290	A
	t = 8.3 ms (60 Hz), sine	310	A
I ² t	T _{VJ} = 45°C t = 10 ms (50 Hz), sine	530	A ² s
	t = 8.3 ms (60 Hz), sine	510	A ² s
	T _{VJ} = 150°C; t = 10 ms (50 Hz), sine	420	A ² s
	t = 8.3 ms (60 Hz), sine	400	A ² s
T _{VJ}		-40...+150	°C
T _{VJM}		150	°C
T _{stg}		-40...+150	°C
P _{tot}	T _C = 25°C	125	W
M _d *	Mounting torque with screw M3	0.45-0.55/4-5	Nm/lb.in.
	Mounting torque with screw M3.5	0.45-0.55/4-5	Nm/lb.in.
V _{ISOL} **	50/60 Hz, RMS, t = 1 minute, leads-to-tab	2500	V~
Weight		6	g

* Version A only; ** Version AR only

Symbol	Test Conditions	Characteristic Values per leg	
		typ.	max.
I _R	T _{VJ} = 25°C T _{VJ} = 25°C T _{VJ} = 125°C	V _R = V _{RRM} V _R = 0.8 • V _{RRM} V _R = 0.8 • V _{RRM}	200 50µA 5 mA
V _F	I _F = 30 A; T _{VJ} = 150°C T _{VJ} = 25°C		0.85 1.10
V _{TO}	For power-loss calculations only		0.72
r _T	T _{VJ} = T _{VJM}		4.2
mΩ			
R _{thJC}			1 K/W
R _{thCH}		0.5	K/W
t _{rr}	I _F = 1 A, -di/dt = 100 A/µs, V _R = 30 V, T _{VJ} = 25°C	35	50ns
I _{RM}	V _R = 100 V; I _F = 30 A; -di _F /dt = 100 A/µs L ≤ 0.05 µH, T _{VJ} = 25°C	4	5 A

* I_{FAVM} rating includes reverse blocking losses at T_{VJM}, V_R = 0.8 V_{RRM}, duty cycle d = 0.5
Data according to IEC 60747 refer to a single diode unless otherwise stated.
IXYS reserves the right to change limits, test conditions and dimensions








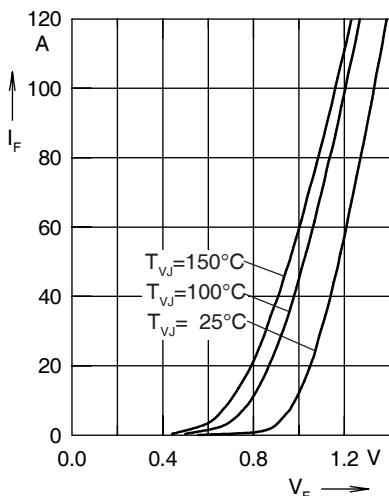
Fig. 1 Forward current I_F versus V_F Fig. 2 Typ. reverse recovery charge Q_r versus $-di_F/dt$ Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$ Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ} Fig. 5 Typ. recovery time t_{rr} versus $-di_F/dt$ Fig. 6 Typ. peak forward voltage V_{FR} and t_{fr} versus di_F/dt 

Fig. 7 Transient thermal impedance junction to case

Dimensions

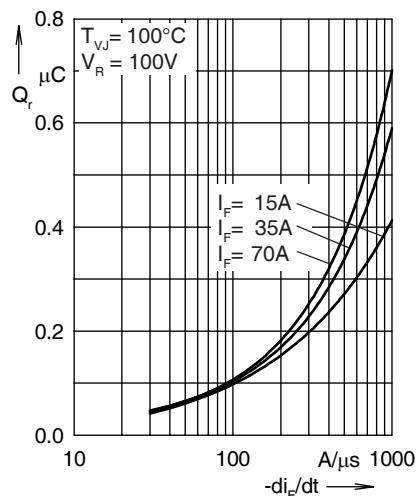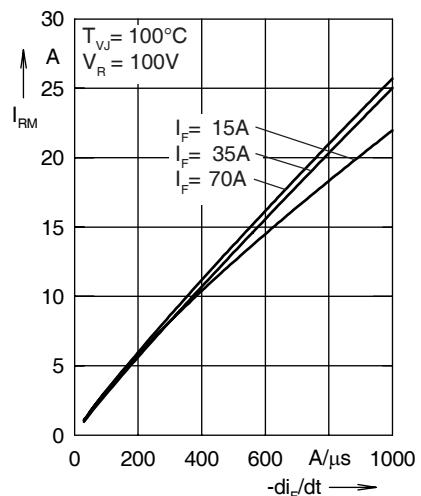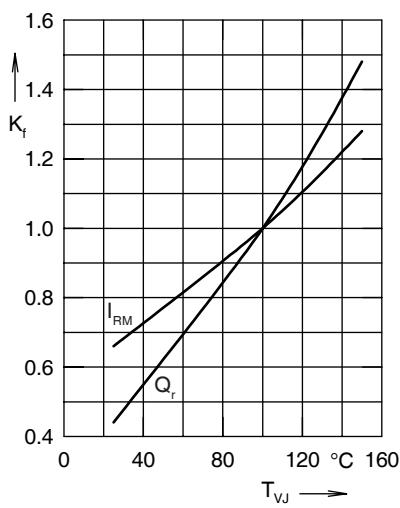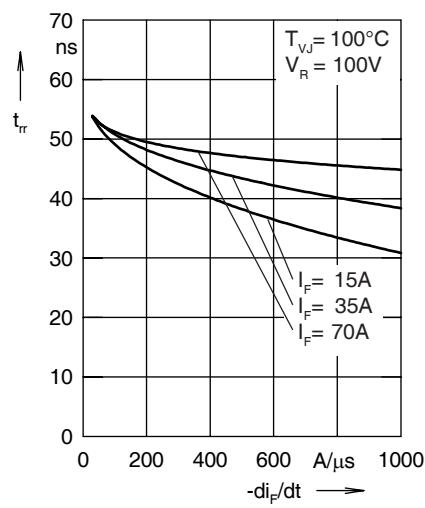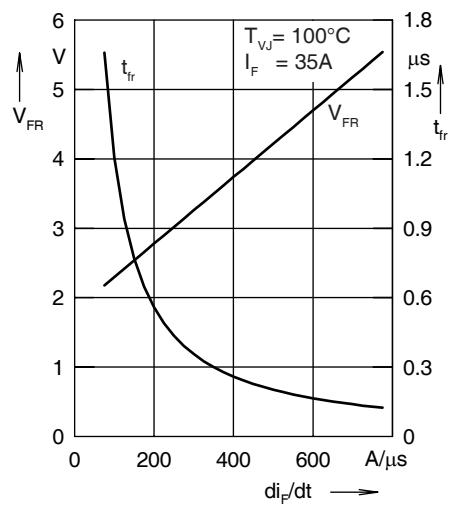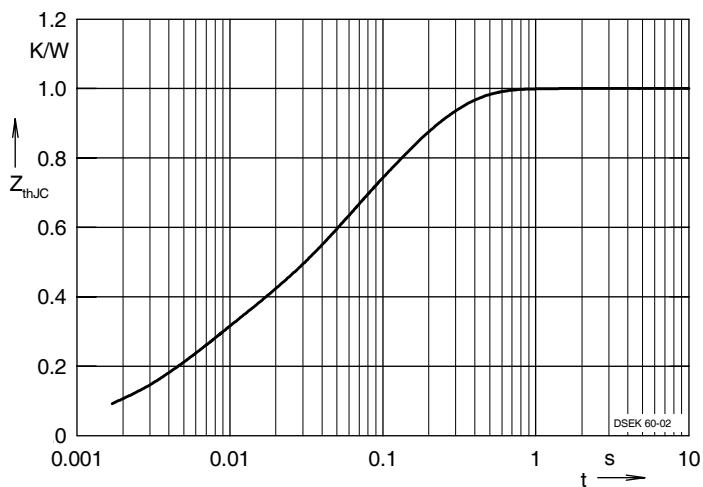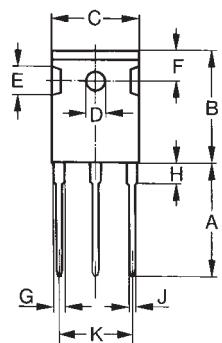

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	2.2	2.54	0.087	0.102

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by IXYS manufacturer:

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)
[CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#) [85HFR60](#) [40HFR60](#)
[VS-88-7272PBF](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [VS-](#)
[12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#) [NTE6162](#) [NTE5850](#)