

"High Frequency Ceramic Solutions"

2.45/5.512 GHz Diplexer

Detail Specification: 01/13/2003

P/N 2450DP15A5512


Page 1 of 2

Part Number	Frequency (MHz)	Attenuation Low Band	Attenuation High Band	Return Loss
2450DP15A5512_	2400 - 2500	0.70 dB max.	15 dB min.	9.5 dB min.
	5150 - 5875	20 dB min.	0.9 dB max.	9.5 dB min.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 Ω	-40 to +85°C	4000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 $\pm$.004	0.049 $\pm$.004	0.034 $\pm$.004	0.012 $\pm$.004	0.008 $\pm$.004	0.012 $\pm$.004/-0.008	0.014 $\pm$.004	0.026 $\pm$.002
mm	2.0 $\pm$ 0.1	1.25 $\pm$ 0.1	0.85 $\pm$ 0.1	0.30 $\pm$ 0.1	0.20 $\pm$ 0.1	0.30+0.1/-0.2	0.35 $\pm$ 0.1	0.65 $\pm$ 0.05

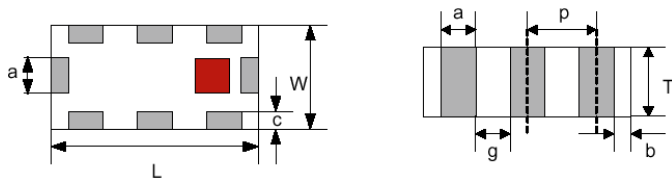


Terminal Configuration

No.	Function	No.	Function
1	GND	5	GND
2	Common Port (P1)	6	GND
3	GND	7	GND
4	High Freq. Port (P3)	8	Low Freq. Port (P2)



Mounting Considerations

Mount these devices with brown colored side facing up. Line width should be designed to provide 50 Ω impedance matching characteristics.

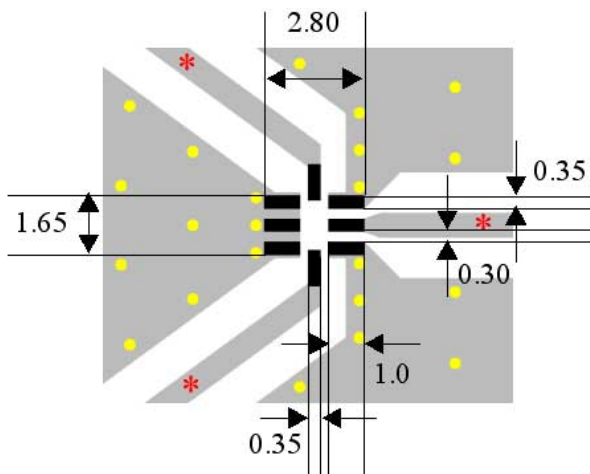

-  Solder Resist
-  Land
-  Through-hole (ϕ 0.35)

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)