


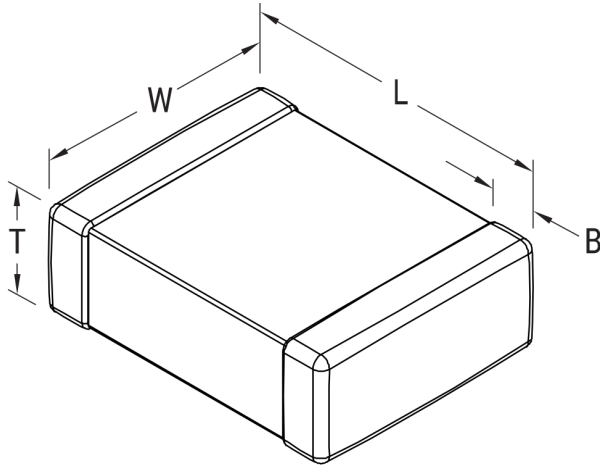

Click [here](#) for the 3D model.

Dimensions

Chip Size	1206
L	3.3mm +/-0.4mm
W	1.6mm +/-0.35mm
T	0.78mm +/-0.20mm
B	0.6mm +/-0.25mm

Packaging Specifications

Packaging	T&R, 180mm, Plastic Tape
Packaging Quantity	4000

General Information

Series	SMD Auto COG Flex
Style	SMD Chip
Description	SMD, MLCC, FT-CAP, Ultra-Stable, Automotive Grade
Features	FT-CAP, Ultra-Stable, Automotive Grade
RoHS	Yes
Termination	Flexible Termination
Marking	No
Qualifications	AEC-Q200
AEC-Q200	Yes
Component Weight	15 mg
Shelf Life	78 Weeks
MSL	1

Specifications

Capacitance	22 pF
Measurement Condition	1MHz 1.0Vrms
Capacitance Tolerance	2%
Voltage DC	250 VDC
Dielectric Withstanding Voltage	625 VDC
Temperature Range	-55/+125°C
Temperature Coefficient	COG
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	30 ppm/C, 1MHz 1.0Vrms
Dissipation Factor	0.1% 1MHz 1.0Vrms
Aging Rate	0% Loss/Decade Hour
Insulation Resistance	100 GOhms

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT](#) ***category:***

Click to view products by [Kemet](#) ***manufacturer:***

Other Similar products are found below :

[01016D101KAT2A](#) [01016D102KAT2A](#) [01016D103KAT2A](#) [01016D103MAT2A](#) [01016D104KAT2A](#) [01016D104MAT2A](#)
[01016D222KAT2A](#) [01016D224MAT2A](#) [01016D472KAT2A](#) [0101YA100JAT2A](#) [0101YA101JAT2A](#) [0101YA120JAT2A](#)
[0101YA150JAT2A](#) [0101YA180JAT2A](#) [0101YA1R0CAT2A](#) [0101YA1R2BAT2A](#) [0101YA220JAT2A](#) [0101YA2R2BAT2A](#)
[0101YA470JATUA](#) [0101YA560JATUA](#) [0101YA6R8CAT2A](#) [0101ZC102KAT2A](#) [0101ZC222JATUA](#) [0101ZC471KAT2A](#)
[0101ZC561KAT2A](#) [02013A0R5BAT2A](#) [02013A0R5CAT2A](#) [02013A0R6BAT2A](#) [02013A0R7BAT2A](#) [02013A100CAT2A](#)
[02013A100DAT2A](#) [02013A100FAT2A](#) [02013A100GAT2A](#) [02013A100JAT2A](#) [02013A101FAT2A](#) [02013A101JAT2A](#) [02013A101KAT2A](#)
[02013A120GAT2A](#) [02013A120JAT2A](#) [02013A150GAT2A](#) [02013A150JAT2A](#) [02013A180GAT2A](#) [02013A180JAT2A](#) [02013A1R0BAT2A](#)
[02013A1R0CAT2A](#) [02013A1R2BAT2A](#) [02013A1R2CAT2A](#) [02013A1R5BAT2A](#) [02013A1R5CAT2A](#) [02013A1R8BAT2A](#)