

### 101.2mm (4.0INCH) SINGLE DIGIT NUMERIC DISPLAY

Part Number: SC40-19EWA High Efficiency Red


#### **Features**

- Large size.
- 4.0 inch digit height.
- Low current operation.
- Excellent character appearance.
- High light output.
- Easy mounting on P.C. boards or sockets.
- Mechanically rugged.
- Standard : gray face, white segment.
- RoHS compliant.

### Description

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

### **Package Dimensions& Internal Circuit Diagram**

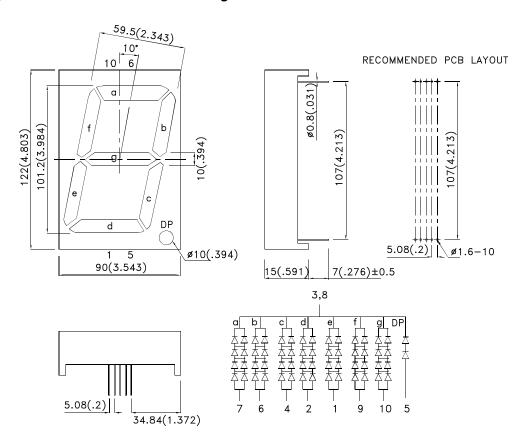

Notes:

- 1. All dimensions are in millimeters (inches), Tolerance is ±0.25(0.01")unless otherwise noted.
- 2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

 SPEC NO: DSAD2339
 REV NO: V.8
 DATE: JAN/22/2011
 PAGE: 1 OF 7

 APPROVED: WYNEC
 CHECKED: Joe Lee
 DRAWN: Y.H.Wu
 ERP: 1301000980

### **Selection Guide**

Part No.	Dice	Lens Type	lv (ucd) [1] @ 10mA		Description
			Min.	Тур.	•
SC40-19EWA	High Efficiency Red (GaAsP/GaP)	White Diffused	14000	23000	Common Cathode, Rt. Hand Decimal.

### Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	High Efficiency Red	627		nm	IF=20mA
λD [1]	Dominant Wavelength	High Efficiency Red	625		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	High Efficiency Red	45		nm	IF=20mA
С	Capacitance	High Efficiency Red	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage Per Segment Or (DP)	High Efficiency Red	8.0 (4.0)	10.0 (5.0)	V	IF=20mA
lr	Reverse Current Per Segment Or (DP)	High Efficiency Red		20 (10)	uA	V <sub>R</sub> =5V (V <sub>R</sub> =5V)

### Notes:

### Absolute Maximum Ratings at TA=25°C


Parameter	Super Bright Green	Units	
Power dissipation Per Segment Or (DP)	600 (150)	mW	
DC Forward Current Per Segment Or (DP)	60 (30)	mA	
Peak Forward Current [1] Per Segment Or (DP)	320 (160)	mA	
Reverse Voltage Per Segment Or (DP)	5 (5)	V	
Operating / Storage Temperature	-40°C To +85°C		
Lead Solder Temperature[2]	2] 260°C For 3-5 Seconds		

Notes: 1. 1/10 Duty Cycle, 0.1ms Pulse Width. 2. 2mm below package base.


SPEC NO: DSAD2339 **REV NO: V.8** DATE: JAN/22/2011 PAGE: 2 OF 7 APPROVED: WYNEC **CHECKED:** Joe Lee DRAWN: Y.H.Wu ERP: 1301000980


<sup>1.</sup> Luminous intensity/ luminous Flux: +/-15%.


<sup>1.</sup>Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.

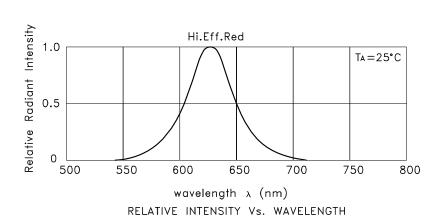


High Efficiency Red SC40-19EWA













 SPEC NO: DSAD2339
 REV NO: V.8
 DATE: JAN/22/2011
 PAGE: 3 OF 7

 APPROVED: WYNEC
 CHECKED: Joe Lee
 DRAWN: Y.H.Wu
 ERP: 1301000980










 SPEC NO: DSAD2339
 REV NO: V.8
 DATE: JAN/22/2011
 PAGE: 4 OF 7

 APPROVED: WYNEC
 CHECKED: Joe Lee
 DRAWN: Y.H.Wu
 ERP: 1301000980

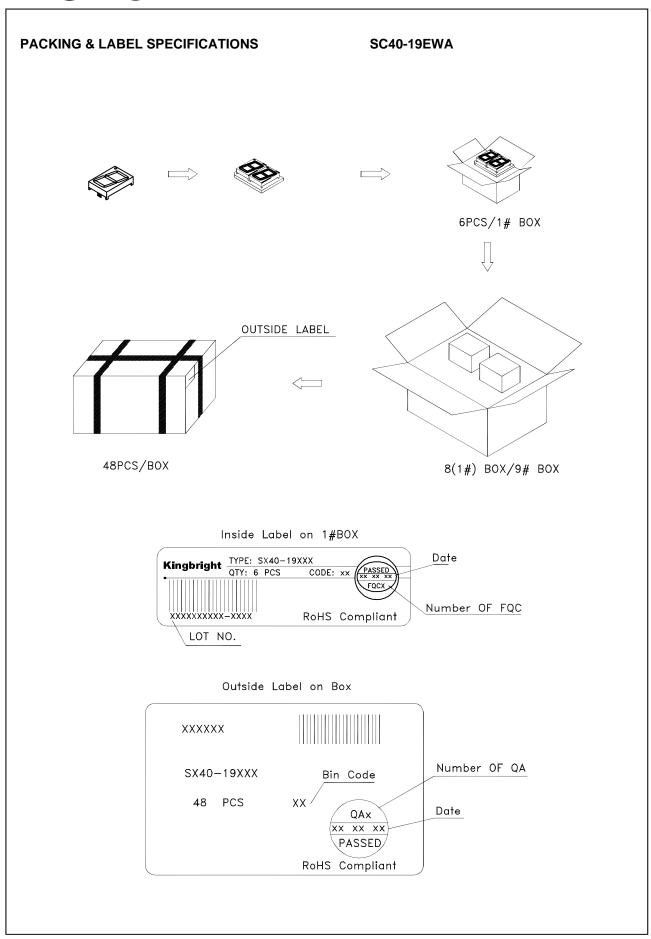


SPEC NO: DSAD2339 APPROVED: WYNEC REV NO: V.8 CHECKED: Joe Lee DATE: JAN/22/2011 DRAWN: Y.H.Wu PAGE: 5 OF 7 ERP: 1301000980

### THROUGH HOLE DISPLAY MOUNTING METHOD


### Lead Forming

Do not bend the component leads by hand without proper tools. The leads should be bent by clinching the upper part of the lead firmly such that the bending force is not exerted on the plastic body.

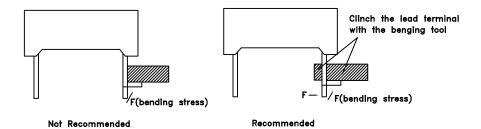


### Installation

- 1. The installation process should not apply stress to the lead terminals.
- 2. When inserting for assembly, ensure the terminal pitch matches the substrate board's hole pitch to prevent spreading or pinching the lead terminals.



### DISPLAY SOLDERING CONDITIONS

Wave Soldering Profile For Lead-free Through-hole LED.



#### NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85°C.
- 3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.During wave soldering , the PCB top-surface temperature should be kept below  $105^{\circ}\mathrm{C}$

5.No more than once.

 SPEC NO: DSAD2339
 REV NO: V.8
 DATE: JAN/22/2011
 PAGE: 6 OF 7

 APPROVED: WYNEC
 CHECKED: Joe Lee
 DRAWN: Y.H.Wu
 ERP: 1301000980

### Soldering General Notes:


- a. Through—hole displays are incompatible with reflow soldering.
- b. If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with Kingbright for compatibility.

### **CLEANING**

- 1.Mild "no-clean" fluxes are recommended for use in soldering.
- 2. If cleaning is required, Kingbright recommends to wash components with water only. Do not use harsh organic solvents for cleaning, because they may damage the plastic parts .And the devices should not be washed for more than one minute.

### CIRCUIT DESIGN NOTES

- 1.Protective current-limiting resistors may be necessary to operate the Displays.
- 2.LEDs mounted in parallel should each be placed in series with its own current—limiting resistor.



SPEC NO: DSAD2339
APPROVED: WYNEC

REV NO: V.8 CHECKED: Joe Lee DATE: JAN/22/2011 DRAWN: Y.H.Wu PAGE: 7 OF 7 ERP: 1301000980

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Displays & Accessories category:

Click to view products by Kingbright manufacturer:

Other Similar products are found below:

LTC-4624JD LTC-4627WC LTC-571P LTM-8522G LTP-4323P LTP-747G LTS-3361JG-06 1668 HT-F196NB-5323 IPD2131-27 SA0312EWA LDQ-N514RI LDS-A3506RD LDS-A3926RI SC03-12HDB SI-B9T151550WW SI-B9V171550WW SLC-3PF-WL SLDN-32M-G
1624 LTC-2621JD LTC-2623WC LTC-4627JD LTD-322G LTD-482PC LTP-1057AHR LTP-1457AKR LTP-3784G-01 LTS-313AP LTS4812SKR-P LTS-547AE LTS-6780P 446010401-3 HV-7W30-6829 DA43-11GWA LDD-A516RI-17 LDD-E305RI LDQ-N3402RI LDQN3606RI LDT-M2804RI 86004CB830 LTP-3862JD LTP-2088AKD LTD-6740P LTS-6880Y LDS-SMC3002RISUGTR LTC-2623E
CC25-12YWA LDM-6432-P3-UR-1 SR420312N/32