

MALLORY**Mallory Sonalert
Products Inc.**

Part #

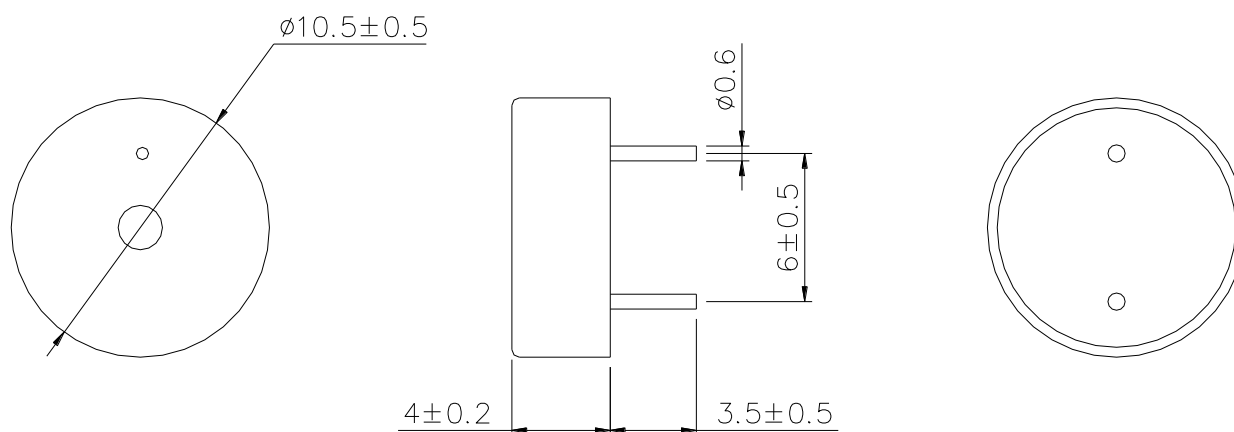
PT-0950PQ**Sales Outline Drawing**

Revision

A

**May not be suitable for all Medical and Aerospace applications.
Contact Mallory Sonalert to discuss your application.**

Resonant Frequency (Hz)	5000
Operating Voltage (Vpp)	5 ~ 20
Rated Voltage (Vpp)	5.0
Current Consumption Max. (mA)	3 at Rated Voltage
Sound Pressure Level Min. (dB)	80 at 10cm at Rated Voltage
Capacitance (pF)	10,000 $\pm$ 30% at 120 Hz
Operating Temperature (°C)	-20 ~ +100
Storage Temperature (°C)	-30 ~ +110
Housing	PBT1200 UL94HB Plastic Resin (Color: Black)
Lead Pins	Tin Plated Brass
Weight (Grams)	0.5
Condition by wave soldering (°C)	260 $\pm$ 5 / within 5 sec
Condition by hand soldering (°C)	350 $\pm$ 20 / within 5 sec
Options	For other options contact factory

Dimensions: (units: mm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Board Mount](#) ***category:***

Click to view products by [Mallory Sonalert](#) ***manufacturer:***

Other Similar products are found below :

[FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PT-3534FP](#) [SC110E](#) [SC616N-2](#) [SCS045MD9DT3S](#) [F/BC 35-DR LF](#) [F/EB20P-DR LF](#)
[FSMD8585JSLF](#) [F/TCW 05 WITH LABEL LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [F-B-P1405ISB LF](#) [F/DGX 05P WITH LABEL LF](#) [F/HCW 06 WITH LABEL LF](#) [DMT-1606S-NL](#) [SBM616J](#) [SBM616PU](#) [SC250H](#) [SC628FK](#)
[32S4120LFPN](#) [PLD-27N35PQ](#) [SMA-17-S](#) [SC235AF](#) [SMA21-P175](#) [1602AC-23-18E-26.000000G](#) [710000013](#) [710100108](#) [710121005](#)
[205311](#) [HNR-1704A](#) [KC1206 16](#) [FUET-1760](#) [FUET-1030H](#) [CPT-1117-83-SMT-TR](#) [CMA-6542PF](#) [CEM-1212S](#) [CMT-4023S-SMT-TR](#)
[CMT-8504-100-SMT-TR](#) [CX-0905C](#) [FMB09A12-12V](#) [FSD-5037](#) [FUET-1365F-05](#) [FSD-3020-12V](#) [SEA-0955Y-0527-16-50P4.0](#) [KC1206R](#)
[42](#) [FSD-2316-24V](#) [LEB1370BS-1.5S-2.4-R](#) [LEB1310BS-05S-2.4-R](#)