

SANYO Semiconductors DATA SHEET

ExPD (Excellent Power Device)

TND311S — General Purpose Driver for PDP Sustain Pulse Drive, Motor Drive, Switching Power Supply, and DC / DC Converter Applications

Features

- · Dual inverter.
- · Monolithic structure (High voltage CMOS process adopted).
- Withstand voltage of 25V is assured.
- Wide range of operating voltage: 4.5V to 25V.
- · Peak outpout current: 2A.
- Fast switching time (25ns typical at 1000pF load).
- Fully compatible input to TTL / CMOS. (VIH=not more than 2.6V, at VDD=4.5 to 25V)
- · Built-in input pull-down resistance.

Specifications

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Supply Voltage	V _{DD}		0 to 25	V
Input Voltage	VIN		GND-0.3 to V _{DD} +0.3	V
Allowable Power Dissipation	P _D max		0.3	W
Junction Temperature	Tj		-55 to +150	°C
Storage Temperature	Tstg		-55 to +150	°C

Recommended Operating Conditions at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Operating Supply Voltage	V _{DD}		4.5 to 25	V
Operating Temperature	Topr		-40 to +125	°C

Electrical Characteristics (AC Characteristics) at Ta=25°C, VDD=18V, VIN=5V

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	Offic
Turn-On Rise Time	tr	CL=1000pF		20	35	ns
Turn-Off Fall Time	tf	CL=1000pF		25	40	ns
Delay Time	t _D 1	C _L =1000pF		25	40	ns
	t _D 2	CL=1000pF		45	60	ns

- Any and all SANYO Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO Semiconductor representative nearest you before using any SANYO Semiconductor products described or contained herein in such
- SANYO Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor products described or contained herein.


TND311S

Electrical Characteristics (DC Characteristics) at Ta=25°C, V_{DD}=4.5 to 25V


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	Unit
Logic "1" Input Voltage	VIH		2.6			V
Logic "0" Input Voltage	VIL				0.8	V
Logic "1" Input Bias Current	IIN+	V _{IN} =V _{DD} =25V		20	55	μΑ
Logic "0" Input Bias Current	IIN-	VIN=0V or VDD	-1		1	μΑ
High Level Output Voltage	Voн	I _O =0A	V _{DD} -0.1			V
Low Level Output Voltage	VOL	IO=0A			0.1	V
V _{DD} Supply Current	Isupp	V _{DD} =10V, V _{IN} =3V, (both inputs)		1.0	4.5	mA
		V _{DD} =10V, V _{IN} =0V, (both inputs)			0.2	mA
Output High Short Circuit Pulsed Current	IO+	V _{DD} =18V, PW≤10μs, V _{OUT} =0V		2.0		Α
Output Low Short Circuit Pulsed Current	IO-	V _{DD} =18V, PW≤10μs, V _{OUT} =18V		2.0		Α
Output On Resistance	ROUT	V _{DD} =18V, Iload=10mA, V _{OUT} ="H"		4	6	Ω
		VDD=18V, Iload=10mA, VOUT="L"		3	5	Ω

Package Dimensions


unit : mm (typ) 7005-007




Block Diagram

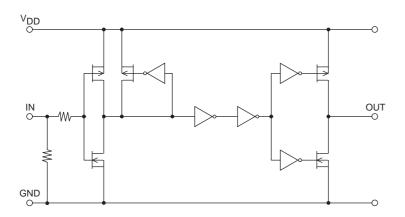


Switching Time Measuring Circuit

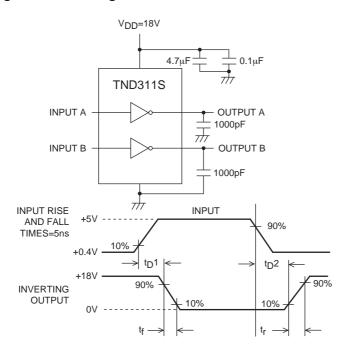

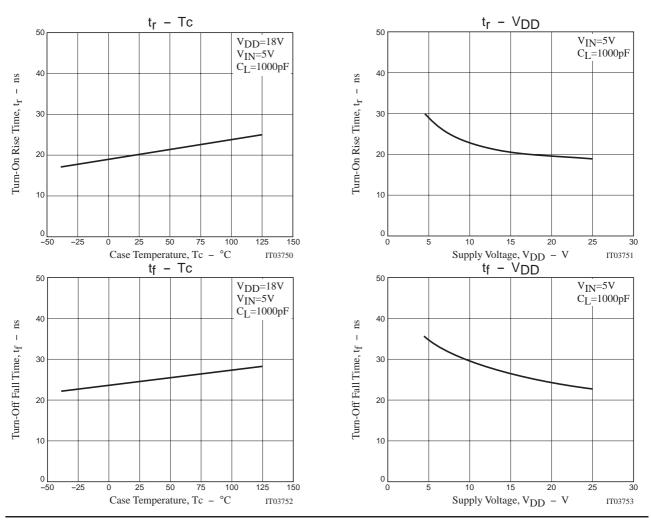

TND311S

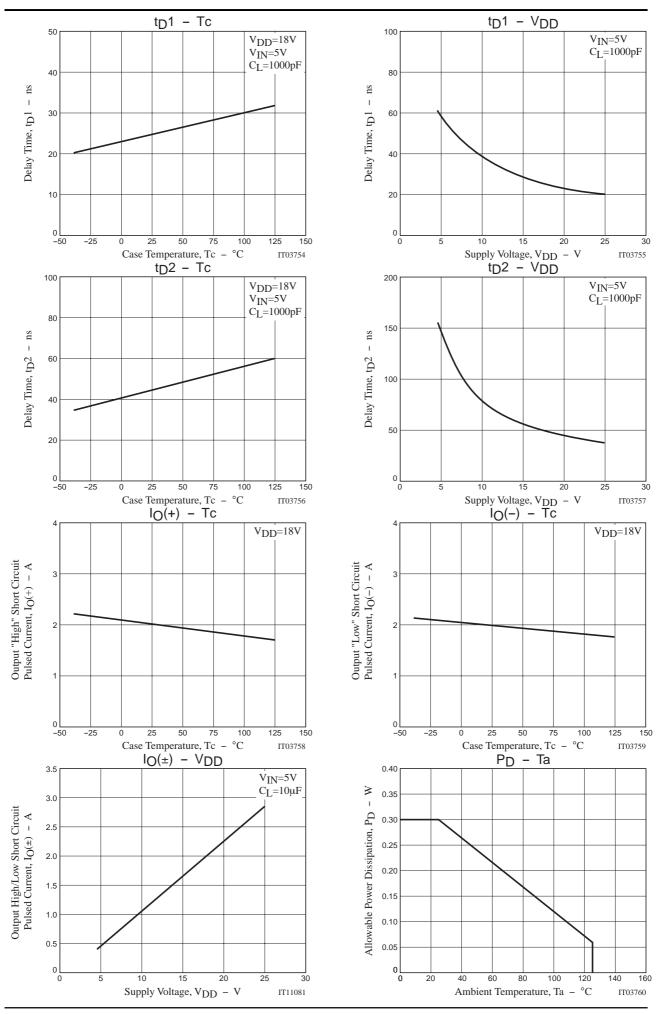

TND311S

- Specifications of any and all SANYO Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Semiconductor Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor products (including technical data,services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Semiconductor Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 2006. Specifications and information herein are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Gate Drivers category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below:

00028 00053P0231 8967380000 56956 CR7E-30DB-3.96E(72) 57.404.7355.5 LT4936 57.904.0755.0 5801-0903 5803-0901 5811-0902 5813-0901 58410 00576P0030 00581P0070 5882900001 00103P0020 00600P0005 00-9050-LRPP 00-9090-RDPP 5951900000 01-1003W-10/32-15 LTILA6E-1S-WH-RC-FN12VXCR1 0131700000 00-2240 LTP70N06 LVP640 0158-624-00 5J0-1000LG-SIL 020017-13 LY1D-2-5S-AC120 LY2-0-US-AC120 LY2-US-AC240 LY3-UA-DC24 00-5150 00576P0020 00600P0010 LZNQ2M-US-DC5 LZNQ2-US-DC12 LZP40N10 00-8196-RDPP 00-8274-RDPP 00-8275-RDNP 00-8609-RDPP 00-8722-RDPP 00-8728-WHPP 00-8869-RDPP 00-9051-RDPP 00-9091-LRPP 00-9291-RDPP