



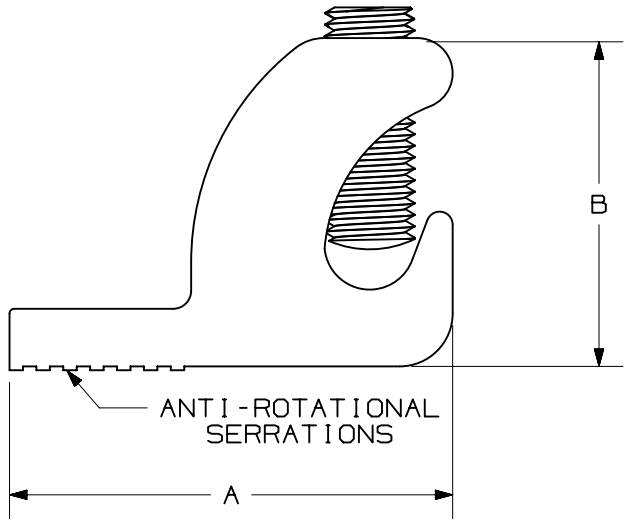


- NOTES:
- 1. MATERIAL: SEE TABLE
 - 2. cULus LISTED FOR POWER AND GROUNDING APPLICATIONS
 - 3. DUAL RATED FOR USE WITH COPPER OR ALUMINUM STRANDED CODE CONDUCTOR (LIAS250-56-X ONLY)
 - 4. PARTS ARE RoHS COMPLIANT
 - 5. USE OF OXIDE INHIBITING JOINT COMPOUND LIKE PANDUIT CMP-100 RECOMMENDED.
 - 6. DIMENSIONS IN BRACKETS ARE MILLIMETERS

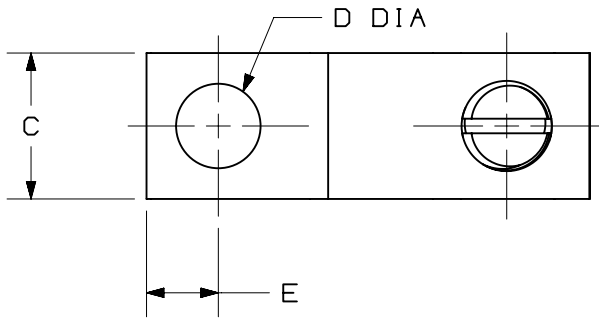

PART NUMBER	MATERIAL	WIRE RANGE	SCREW TYPE	TIGHTENING TORQUE	PACKAGING QUANTITY	 POWER UL486A-486B	 GROUNDING UL467	DIMENSIONS - IN [mm] ±.02 [.5]				
								A	B	C	STUD HOLE D DIA	E
LICC4-22-TL	COPPER	#14 - #4 CU AWG	1/4-28 SLOTTED STAINLESS STEEL	#14-#10 = 20 IN-LB #8 = 25 IN-LB #6-#4 = 35 IN-LB	250	600V RATING 90° C	YES DIRECT BURIAL RATED	1.06 [27.0]	.75 [19.0]	.39 [9.9]	#12 .22 [5.6]	.19 [4.8]
LICC4-22TP-TL	COPPER, TIN PLATED				250							
LIAS250-56-X	ALUMINUM, TIN PLATED	#6- #250 kcmil CU/AL AWG	1/2-18 W/ 1/4 HEX KEY STEEL, ZINC PLATED	200 IN-LB	10	600V RATING 90° C AL9CU	YES NOT DIRECT BURIAL RATED	2.20 [55.9]	1.70 [43.2]	.80 [20.3]	5/16" .33 [8.4]	.40 [10.2]

00	10-20-23	JHNU	JHNU	MRWA	DRAWING RELEASED	135288
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PART NUMBER		SEE TABLE	
TITLE			
LIAC, LICC Lay-In Lug (Reditek Phase 2) Customer Drawing			
CUSTOMER DRAWING			
ITEM REVISION NAME		03468NBE/00	
DATASET FILE NAME		03468NBE-DC/00	
		THIRD ANGLE PROJECTION	
MATERIAL		SEE TABLE	
DRAWN BY		JHNU	
DATE		10-20-23	
CHK		JHNU	
SCALE		NONE	
DRAWING NUMBER		03468NBE - DC	
SHEET 1 OF 1		B	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70228-3](#) [00-054007-70256-6](#) [00-054007-70316-7](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2900-1-04412](#) [0190160084](#) [0190350008](#) [600TS-10](#) [605601-1](#) [60617-1-C](#) [61314-6-C](#) [626-0194](#) [63-S](#) [M55155/079C01](#) [M55155/099B03](#) [M55155/109H01](#) [M55155/12XH05](#) [M55155/29XJ08](#) [M55155/30-6S](#) [M55155/30-9S](#) [M55155/30XI09](#) [M6-14RSX](#) [696861-1](#) [696999-1](#) [M86700006](#) [D18-110B-C](#) [D18-110B-M](#) [701-1936](#) [701-1955](#) [701-2003](#) [701-2007](#) [701-2013](#) [701-2018](#) [701-2069](#) [701-2077-60](#) [701-2315](#)