




PUIaudio



Data Sheet

AT-1240-TT


Features:

- Small 12mm x 5.5mm size
- Wide 1 to 20Vpp Operating Voltage Range
- 4kHz resonant frequency

Specifications

Parameters	Values	Units
Rated Voltage	5	Vp-p
Operating Voltage Range	1 ~ 20	Vp-p
Current Draw at Rated Voltage	5	mA
Capacitance	12,000 $\pm$ 30%	pF
Minimum SPL @ 10cm	80	dBA
Resonant Frequency	4,000 $\pm$ 500	Hz
Housing Material	Black PPO	-
Terminal Material	Red Copper	-
Weight	1	Grams
Environmental Compliances	RoHS/REACH	Ex. 7c-1
Storage Temperature	-40 ~ 85	°C
Operating Temperature	-30 ~ 70	°C

Measurement Method (4kHz, 5Vpp)

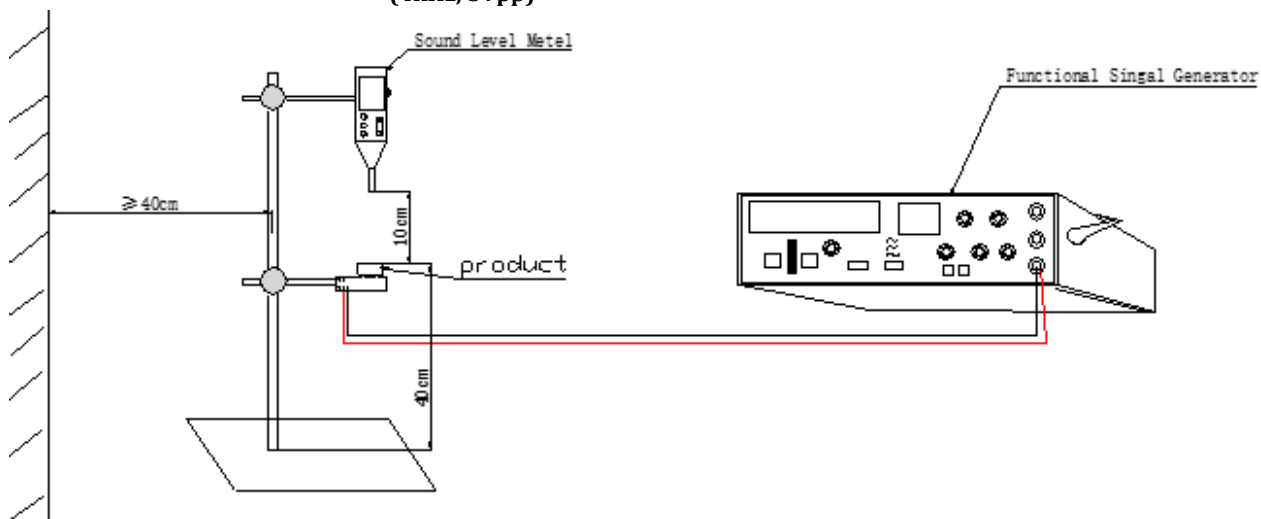


Reliability Testing

Type of Test	Test Specifications
High Temperature Test	96 hours at 85°C
Low Temperature Test	96 hours at -40°C
Humidity Test	96 hours at 40°C with relative humidity at 90~95%
Temperature Cycle Testing	Run for 5 cycles with each cycle consisting of:
Vibration Test	Run in the X, Y and Z directions for 2 hours each
Drop Test	Free drop a unit from the height 70cm to the surface of a 10mm thick board, in three directions(X,Y,Z).

After each test, let the part rest for 2 hours, then the change in SPL shall be within $\pm 5\text{dB}$

Dimensions

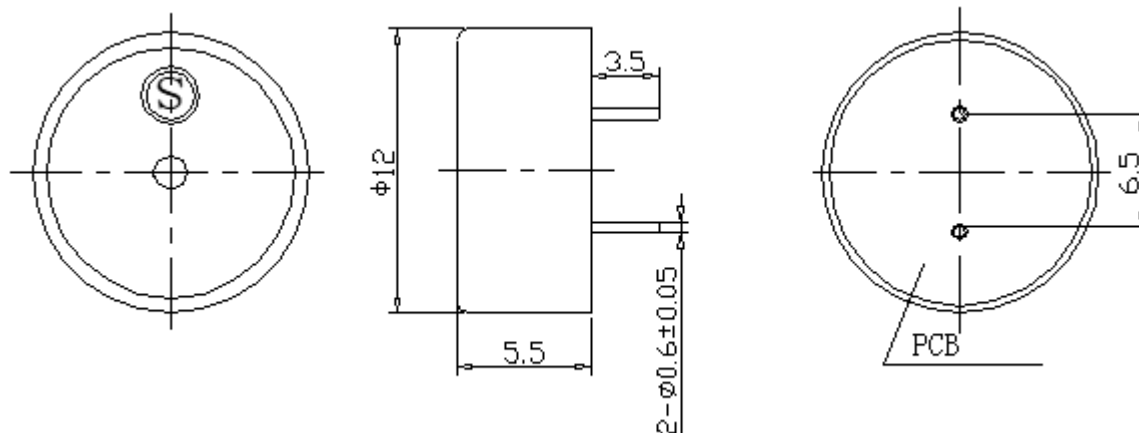

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Board Mount](#) ***category:***

Click to view products by [PUI Audio](#) ***manufacturer:***

Other Similar products are found below :

[FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PT-3534FP](#) [SC110E](#) [SC616N-2](#) [SCS045MD9DT3S](#) [F/BC 35-DR LF](#) [F/EB20P-DR LF](#)
[FSMD8585JSLF](#) [F/TCW 05 WITH LABEL LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [F-B-P1405ISB LF](#) [F/DGX 05P WITH LABEL LF](#) [F/HCW 06 WITH LABEL LF](#) [DMT-1606S-NL](#) [SBM616J](#) [SBM616PU](#) [SC250H](#) [SC628FK](#)
[32S4120LFPN](#) [PLD-27N35PQ](#) [SMA-17-S](#) [SC235AF](#) [SMA21-P175](#) [1602AC-23-18E-26.000000G](#) [710000013](#) [710100108](#) [710121005](#)
[205311](#) [HNR-1704A](#) [KC1206 16](#) [FUET-1760](#) [FUET-1030H](#) [CPT-1117-83-SMT-TR](#) [CMA-6542PF](#) [CEM-1212S](#) [CMT-4023S-SMT-TR](#)
[CMT-8504-100-SMT-TR](#) [CX-0905C](#) [FMB09A12-12V](#) [FSD-5037](#) [FUET-1365F-05](#) [FSD-3020-12V](#) [SEA-0955Y-0527-16-50P4.0](#) [KC1206R](#)
[42](#) [FSD-2316-24V](#) [LEB1370BS-1.5S-2.4-R](#) [LEB1310BS-05S-2.4-R](#)