


**MODEL:** CPT-3010-90T | **DESCRIPTION:** PIEZO BUZZER TRANSDUCER**FEATURES**

- piezo
- 90 dB @ 10 cm
- through hole

**SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage	Vp-p  0V		5		Vp-p
operating voltage				30	Vp-p
current consumption	at rated voltage			1.5	mA
rated frequency		2,000	2,500	3,000	Hz
sound pressure level	at 10 cm, rated voltage	90			dB
electrostatic capacitance	at 120 Hz	21,000	30,000	39,000	pF
dimensions	Ø30 x 12				mm
weight			4.4		g
material	ABS 757 (UL94HB)				
terminal	pin (tin plated brass)				
operating temperature		-20		70	°C
storage temperature		-30		80	°C
washable	no				
RoHS	yes				


Notes: 1. All specifications measured at 25±2°C, humidity at 45-60%, unless otherwise noted.

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 5 seconds	330	350	370	°C
wave soldering	for maximum 5 seconds	255	260	265	°C


MECHANICAL DRAWING

units: mm
tolerance: ± 0.5 mm

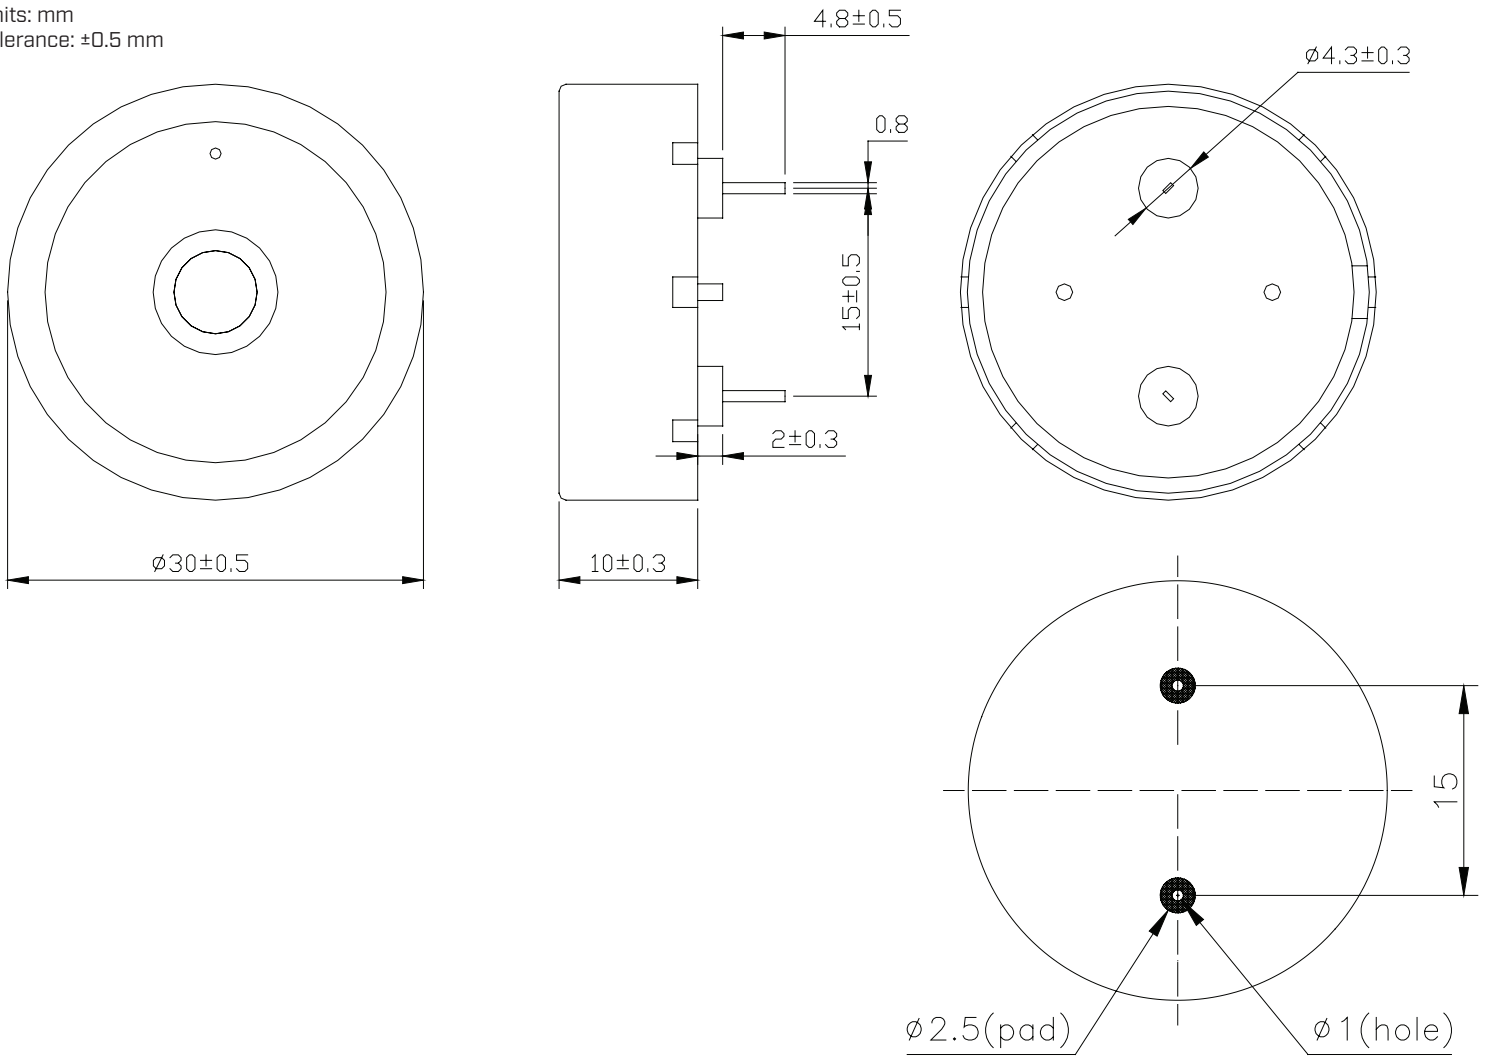

Recommended PCB Layout
Top View

FREQUENCY RESPONSE CURVE

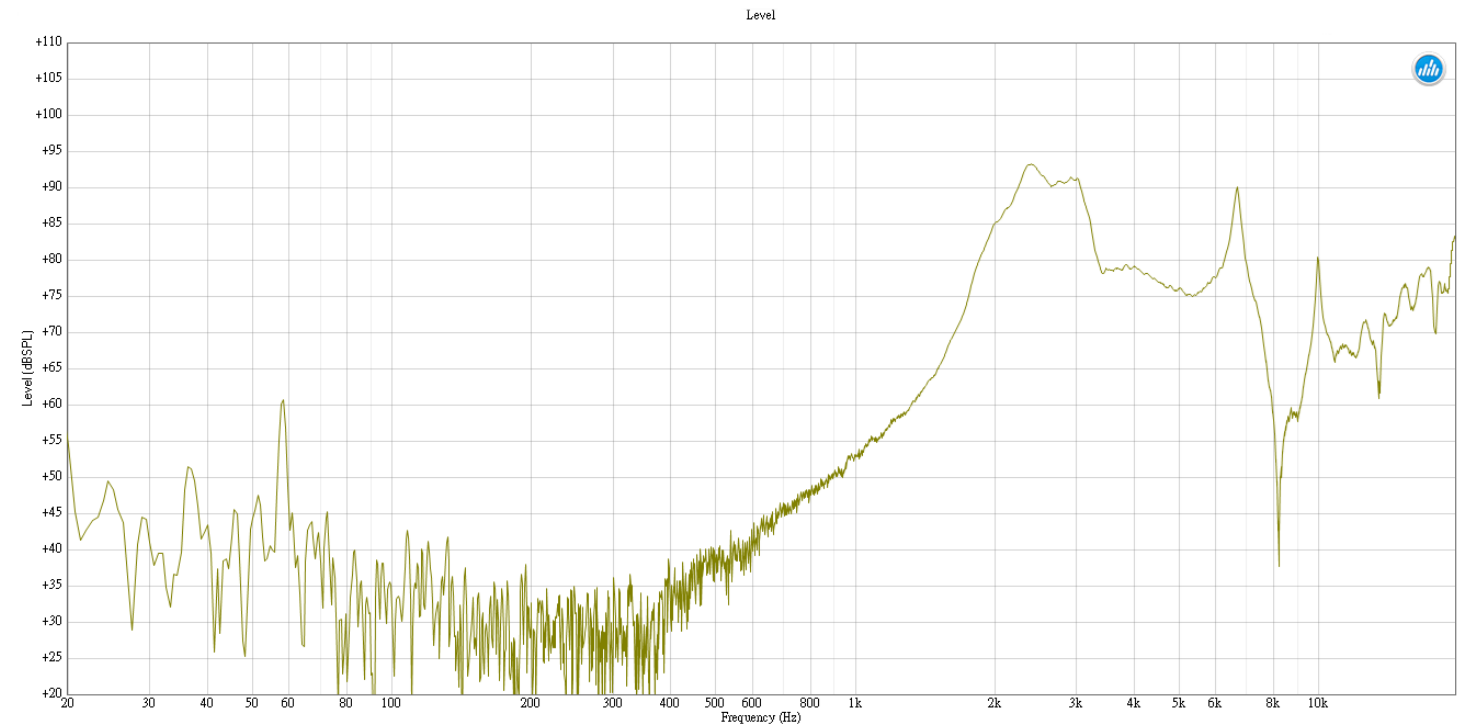

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Board Mount](#) ***category:***

Click to view products by [Same Sky](#) ***manufacturer:***

Other Similar products are found below :

[FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PT-3534FP](#) [SC110E](#) [SC616N-2](#) [SCS045MD9DT3S](#) [F/BC 35-DR LF](#) [F/EB20P-DR LF](#)
[FSMD8585JSLF](#) [F/TCW 05 WITH LABEL LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [F-B-P1405ISB LF](#) [F/DGX 05P WITH LABEL LF](#) [F/HCW 06 WITH LABEL LF](#) [DMT-1606S-NL](#) [SBM616J](#) [SBM616PU](#) [SC250H](#) [SC628FK](#)
[32S4120LFPN](#) [PLD-27N35PQ](#) [SMA-17-S](#) [SC235AF](#) [SMA21-P175](#) [1602AC-23-18E-26.000000G](#) [710000013](#) [710100108](#) [710121005](#)
[205311](#) [HNR-1704A](#) [KC1206 16](#) [FUET-1760](#) [FUET-1030H](#) [CPT-1117-83-SMT-TR](#) [CMA-6542PF](#) [CEM-1212S](#) [CMT-4023S-SMT-TR](#)
[CMT-8504-100-SMT-TR](#) [CX-0905C](#) [FMB09A12-12V](#) [FSD-5037](#) [FUET-1365F-05](#) [FSD-3020-12V](#) [SEA-0955Y-0527-16-50P4.0](#) [KC1206R](#)
[42](#) [FSD-2316-24V](#) [LEB1370BS-1.5S-2.4-R](#) [LEB1310BS-05S-2.4-R](#)