

Flat suction pad (round)

SUF 20 NBR-ESD-55 G1/8-IG

Part no...:10.01.01.14127

<https://www.schmalz.com/10.01.01.14127>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Suction Cups for the Electronics Industry > Flat Suction Cups SUF > SUF 20 NBR-ESD-55 G1/8-IG

Flat suction cup (round) for process safe handling of smooth or slightly rough surfaces




Size: 20

Suction cup material: Nitrile rubber NBR-ESD

Material hardness [Shore A]: 55 Shore A

Vacuum connection: G1/8"-F

Design Data

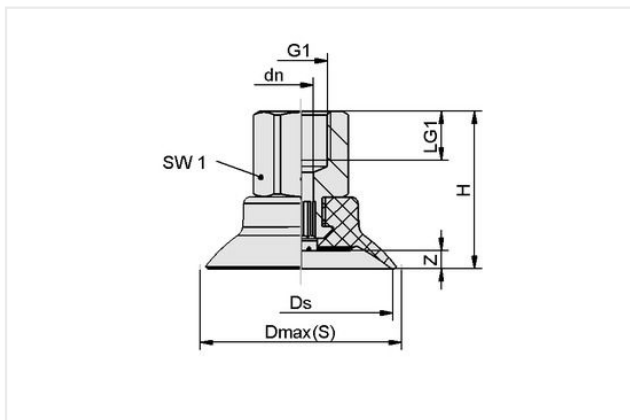

Attribute	Value
Dmax(S)	22.80 mm
Ds	20 mm
dn	3.10 mm
G1	G1/8"-F
H	23.50 mm
LG1	8 mm
SW1	14 mm
Z (Stroke)	2 mm

Technical Data

Attribute	Value
Suction force (-600mbar)	15 N
Pull-off force	15 N
Volume	0.50 cm ³
Curve radius (min) (convex)	20 mm
Hose diameter (empf.) d	4 mm
Size	20
Suction cup material	Nitrile rubber NBR-ESD
Material hardness [Shore A]	55 Shore A

Contact Schmalz

Schmalz Sp.z.o.o. | ul. Fabianowska 131/A1, 62-052 Komorniki, Poland | +48 61 628 67 70 | schmalz@schmalz.pl

Flat suction pad (round)

SUF 20 NBR-ESD-55 G1/8-IG

Part no.:10.01.01.14127

<https://www.schmalz.com/10.01.01.14127>

Weight	6.50 g
Product family	SUF
Number of folds	0

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor
Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Spare parts



SC 030 G1/8-IG

Part no.:10.01.06.04307

Connection geometry: 030

Vacuum connection: G1/8"-F

Fitting length: 14 mm

Nominal diameter dn: 3.1 mm



SUF 20 NBR-ESD-55 SC030

Part no.:10.01.01.14036

Size: 20

Suction cup material: Nitrile rubber NBR-ESD

Material hardness [Shore A]: 55 Shore A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bench Top Tools](#) category:

Click to view products by [SCHMALZ](#) manufacturer:

Other Similar products are found below :

[0027](#) [6104-201-2102](#) [6104-201-2502](#) [6-1372442-6](#) [62500-1584](#) [63801-7252](#) [63801-7274](#) [69002-5525](#) [691667-1](#) [904449-1](#) [9-22280-9](#) [1-1901086-7](#) [1-1976053-3](#) [1-2119644-2](#) [1-21000-6](#) [122983-1](#) [1424264-1](#) [1428211-1](#) [18023-9](#) [189763-1](#) [1901726-1](#) [1954222-1](#) [2079747-1](#) [21001-2](#) [992342-2](#) [2063796-1](#) [2119645-1](#) [2-21000-5](#) [2217396-1](#) [23238-1](#) [250609-000](#) [312324-1](#) [354005-2](#) [4-21000-0](#) [310600-1](#) [376166376170](#) [39380](#) [458267-1](#) [461061-1](#) [464923-1](#) [Y6326-208-21336000](#) [108821-ZZ](#) [6104-201-2302](#) [6104-202-1502](#) [6104-203-2502](#) [6104-204-1702](#) [6104-213-0902](#) [6326-208-21336](#) [5-21084-1](#)