



深圳市首韩科技有限公司
SHENZHEN SHOUHAN TECHNOLOGY CO., LTD
Tel: 0755-27597601 Fax: 0755-27597491

承 认 书

SPECIFICATION FOR APPROVAL

客 户 Customer:

产品名称 Project: 轻触开关

规格型号 Part No: TS4540TP

贵公司承认印 Approal signatures

| 料 号/Part No. | 签 章/Signatures |
|--------------|----------------|
| | |

日期 Date:

| | | |
|-------------|-----|--|
| 拟制/Drawn | 李春风 |  |
| 审核/Check | 张栋 | |
| 批准/Approved | 罗孝金 | |



产品规格书

PRODUCT SPECIFICATION

| SIRLES | | 系列:FLIP SWITCHES(轻触开关) | |
|--|--|---|--|
| MODEL | | 型号: TS4540TP | |
| 1.RATING | | 额定值:50mA 12V DC | |
| 2.CONSTRUCTION DIMENSION 结构尺寸 | | Apply to the appended drawing:符合附加图纸 | |
| 3.APPEARANCE 外观 | | Have no remarkable damage,crack and rust etc:无明显损伤,裂纹,锈迹等. | |
| 4.CONTACTLOOP 接触回路 | | Monople loop:单通单极回路 | |
| ITEM 专案 | TEST CONDITION 测试条件 | SPECIFICATION 规格 | |
| 5.CAPABILITY OF ELECTRIC 电气性能 | | | |
| 5A INSULATION RESISTANCE 绝缘电阻 | Measurements shall be made following Application of DC100V potential across terminals and across terminals and frame for 1minute,在端子之间和端子与壳之间加 DC100V 条件下,持续 1 分钟测量. | 100MΩ min 100 MΩ 以上. | |
| 5B WITHSTAND VILTAGE 耐电压 | AC250V、50HZ、1 min (immin(interrupting current≤500uA). AC250V、50HZ、1 分钟(漏电流 500uA) | There shall be no breakdown 无击穿现象出现。 | |
| 5C CONTACT CIRCUIT 接触电路 | Addition 1.5-2 time force on the top of the keystrok and press the switch,DC50V100mA 在按键顶端上等于作用力 1.5-2 倍的力按动开关,DC50V,10Ma. | 100mΩ Max (100mΩ 以下) | |
| 5D SWITCH CONNECTION FLASH 开关接触点抖动 | Addition DC5V on the two side of switch,at a speed of 3-5time a sec.to press the switch.在开关的两端加 DC5V 的电压,以 3-5 次/秒的速度按动开关. | The flash time between open not more than 10ms. 开关在接通和断开时的接点抖动时间不大于 10 ms. | |
| 6.MECHANICAL EFFICIENCY 机械性能 | | | |
| 6A CONTACT STRENGTH 按键强度 | The contact shall be capable of a force of 5N for 5 seconds in any directions.沿开关动作方向可承受静压力 5N, 保持 5 秒钟. | Switch electric and mechanical efficiency does not break 无损开关电气或者机械性能 | |
| 6B CONTACT JOURNEY 按键行程 | 开关 的动作方向为垂直放置开关,并以双倍动作力的静 负荷作用推柄中心,测量推柄从开始到停止的行程 距离 | 0.25± 0.1mm | |
| 6C DRIVE FORCE 驱动力 | Being measure at across spring piece and across keystoke forergometer. 用测力计在按键与弹片之间测量. | 按键开关驱动力为 250±50gf | |



深圳市首韩科技有限公司

| | | | |
|----|------------------------------|--|---|
| 6D | CONNECTION STRENGTH 接线端强度 | A force of 1N being appling in any directions of the switch connection part..在接线端的作用方向施加1N 的力. | Switch mechanical efficiency does not break.无损开关机械性能. |
| 6E | MECHANICAL LIFE 机械寿命 | Operatin at a rate of 30-50 cycles a minute. 以30-50 次/分的驱动速度操作. | Life:100000cycles 寿命:100000次 |

7.ENVIRONMENT----RESISTANT EFFICIENCY 耐环境性能

| | | | |
|----|----------------------------|--|--|
| 7A | CHANGE OF TEMPERATURE 温度变化 | The first temperature shall be 70 °C ,3h and changed to -25°C, 0.5h, 5cycles of above test. 先70°C, 3h, 然后-25°C, 0.5h, 如此重复5次. | 1. The appearance should not break. 外观应无损伤. 2. Contact resistance $\leq 100 \text{ M } \Omega$ 接触电阻 $\leq 100\text{M}\Omega$ 3. Insulation resistance $\geq 100 \text{ M } \Omega$ 绝缘电阻 $\geq 100 \text{ M } \Omega$ |
| 7B | HUMIDITY RESISTANT 耐湿热 | 40±2°C in temperature and 90~95%RH, Ruring thetest time without load; After testing the temperature should be 24h. 经40±2°C, 相对湿度90~95%, 试验期间, 开关不动作, 不带电负荷, 试验后恢复到常温24h. | |

8. JOINTING EFFICIENCY 焊接性能

| | | | |
|----|---------------------------------|--|--|
| 8A | SOLDERABILITY 可焊性 | Temperature 260±5°C ; Duration: 3±0.5S: 温度在260±5°C, 持续3±0.5S. | Solderability part should above 90% 可焊部分被焊料覆盖面应在90%以上. |
| 8B | SOLDER—RESISTANT 耐焊剂性 | Warm-up temperature: 100°C, 40S, 焊锡温度260±5°C, 浸焊时间5±0.5S. | Froth height of assist solder should under board and switch electric and mechanical efficiency does not break. 助焊剂发泡不应超过印制板, 无损伤开关电气或机械动作性能. |
| 8C | JOINTING—RESISTANT 耐焊接热 | Jointing temperature: 260 ± 5 °C, Duration of immersion: 5±1S. 焊锡温度260±5°C, 浸焊时间5±1S | efficiency does not break 无损伤开关电气或机械动作性能. |
| 8D | NORMAL JOINTING TIMES 正常焊接次数 | | ≤2times 小于2次 |


9.NOTES

| | |
|----|---|
| 9A | The whole boxes of switch should keep in the temperature -30--80 °C and less than 80%RH without acidic, alkalescence, caustic gas in the environment of the storage. 整箱包装的开关, 应在温度为-30--80°C, 相对湿度不大于80%, 周围的空气中没有酸性、碱性或其他腐蚀性气体的库房内保管。 |
| 9B | Operating Temperature Range:-20 to 85°C 操作温度的范围: -20 to 85°C |
| 9C | Switch should install in a correct method. 开关应按正确的安装方法进行正确安装使用。 |






深圳市首韩科技有限公司

TITLE : TACT SWITCH



MODEL : TS454OTP

| UNIT : | MM | DWN. | 李春风 | DATE | |
|---------|-------|-------|-----|------|--|
| SCALE : | 5 : 1 | CHK'D | 张栎 | DATE | |
| VERSION | 01 | APPD. | 罗孝金 | DATE | |

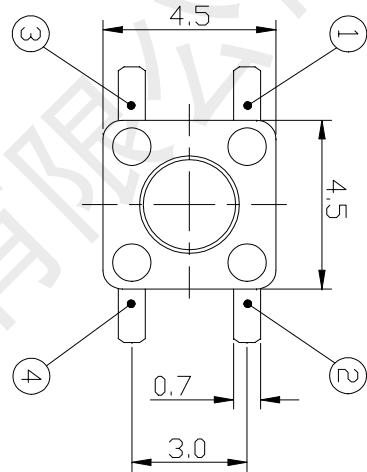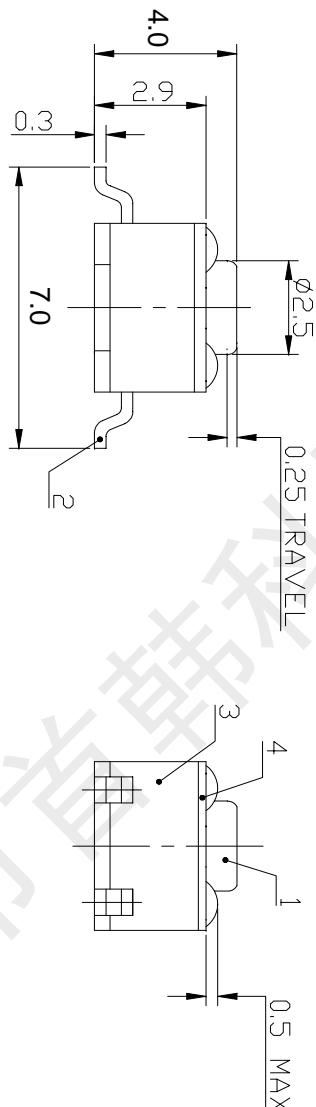

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tactile Switches](#) category:

Click to view products by [SHOU](#) manufacturer:

Other Similar products are found below :

[5GTH92001](#) [5GTH9202242](#) [6407-250V-25273P](#) [ADTSA62NV](#) [ADTSA62RV](#) [B3F-3123](#) [1977177-8](#) [1977266-1](#) [ADTSA63NV](#)
[ADTSM21NSVTR](#) [ADTSM25RVTR](#) [ADTSM32NVTR](#) [ADTSMW64RV](#) [FSMRA4JHA04](#) [GS4.70F300QP](#) [KSC241J SP DELTA LFS](#)
[3FTL600RAS](#) [3FTL640RAS](#) [Y96K132V0FPLFS](#) [5GTH9658222](#) [ADTSM31NVTR](#) [EVQ-P1D05K](#) [2-1977120-7](#) [TSJW-5.2-260-TR](#)
[KMT011MNGJLHS](#) [ADTSG648NV](#) [ADTSM62KSVTR](#) [ADTSM648NV](#) [95C06E3RAT](#) [5GTH96561](#) [3ATH9Q](#) [FSM4JSMLXTR](#)
[FSM4JSMXL](#) [FSMRA8JHA04](#) [HARS0073](#) [Y97HS12A5RAFP](#) [Y97BT23B2HAFP](#) [Y33R411N9FPLFT](#) [Y31C01402FPLFS](#)
[PTS645SK50SMTR92](#) [ADTSM32NVB](#) [KMS233GPWTLS](#) [Y78B42324FP](#) [Y33R21116FPLFT](#) [Y31B43131FPLFG](#) [Y78B64124FP](#)
[Y71243251FP](#) [Y33R31119FPLFT](#) [Y97HS12A5T AFP](#) [PTS638SK25SMTR2LFS](#)