



# SPLATCH 5G/LTE EUROPE CELLULAR WIDEBAND CHIP ANTENNA 617-5000MHz

Part Numbers:

L000657-01

L000657-80

## FEATURES & BENEFITS

- Omnidirectional coverage
- High efficiency, low profile, on board SMD PCB antenna
- Wideband coverage for 3G, 4G and 5G FR1
- Evaluation board available for testing (L000682-80)
- Bandwidth and performance dependent on ground plane size / design
- Suggested minimum ground plane length from antenna feed is 150mm
- Available in tape & reel packaging for automatic mounting
- RoHS 2.0 compliant, Road vehicle compliant, REACH compliant


The L000682-01 is a wideband 5G antenna with performance fine-tuned for European 5G bands and on a smaller footprint as compared to the L000657-01 antenna in the same series.

## SPECIFICATIONS

Frequency Range (MHz)	617-698	698-960	1427-1661	1695-2400	2484-2690	3300-4200	4400-5000
<b>VSWR</b>	< 4.3:1	< 2.9:1	< 3.2:1	< 3.2:1	< 1.8:1	< 2.7:1	< 2.9:1
<b>Average Efficiency</b>	53.50%	56.00%	61.00%	65.10%	83.50%	73.60%	68.80%
<b>Peak Gain</b>	1.0dBi	2.4dBi	2.6dBi	4.0dBi	5.9dBi	5.3dBi	4.5dBi
<b>Average Gain</b>	-2.77dBi	-2.56dBi	-2.15dBi	-1.87dBi	-0.76dBi	-1.33dBi	-1.64dBi
<b>Power Handling</b>	5 Watt cw						
<b>Feed Point Impedance</b>	50 ohms unbalanced						
<b>Polarization</b>	Linear						
<b>Size</b>	50.0 mm x 10.0 mm x 1.61 mm						
<b>Weight</b>	< 1.5 g						
<b>Mounting</b>	Surface mount						
<b>Operating Temperature</b>	-40 to +85°C						
<b>Storage Temperature</b>	-40 to +85°C						
<b>Packaging Specification</b>	Bag & Box / Tape & Reel						
<b>Hazardous Materials</b>	A certificate of conformance is available from the product page on TE website.						





Data measured in free space and on reference ground plane of 150mm ground length and 55mm width, application data might vary.

**RF DATA (SHOWN AS L000657-1 : OTHERS CAN VARY WITH DIFFERENT GROUND LENGTHS.)**

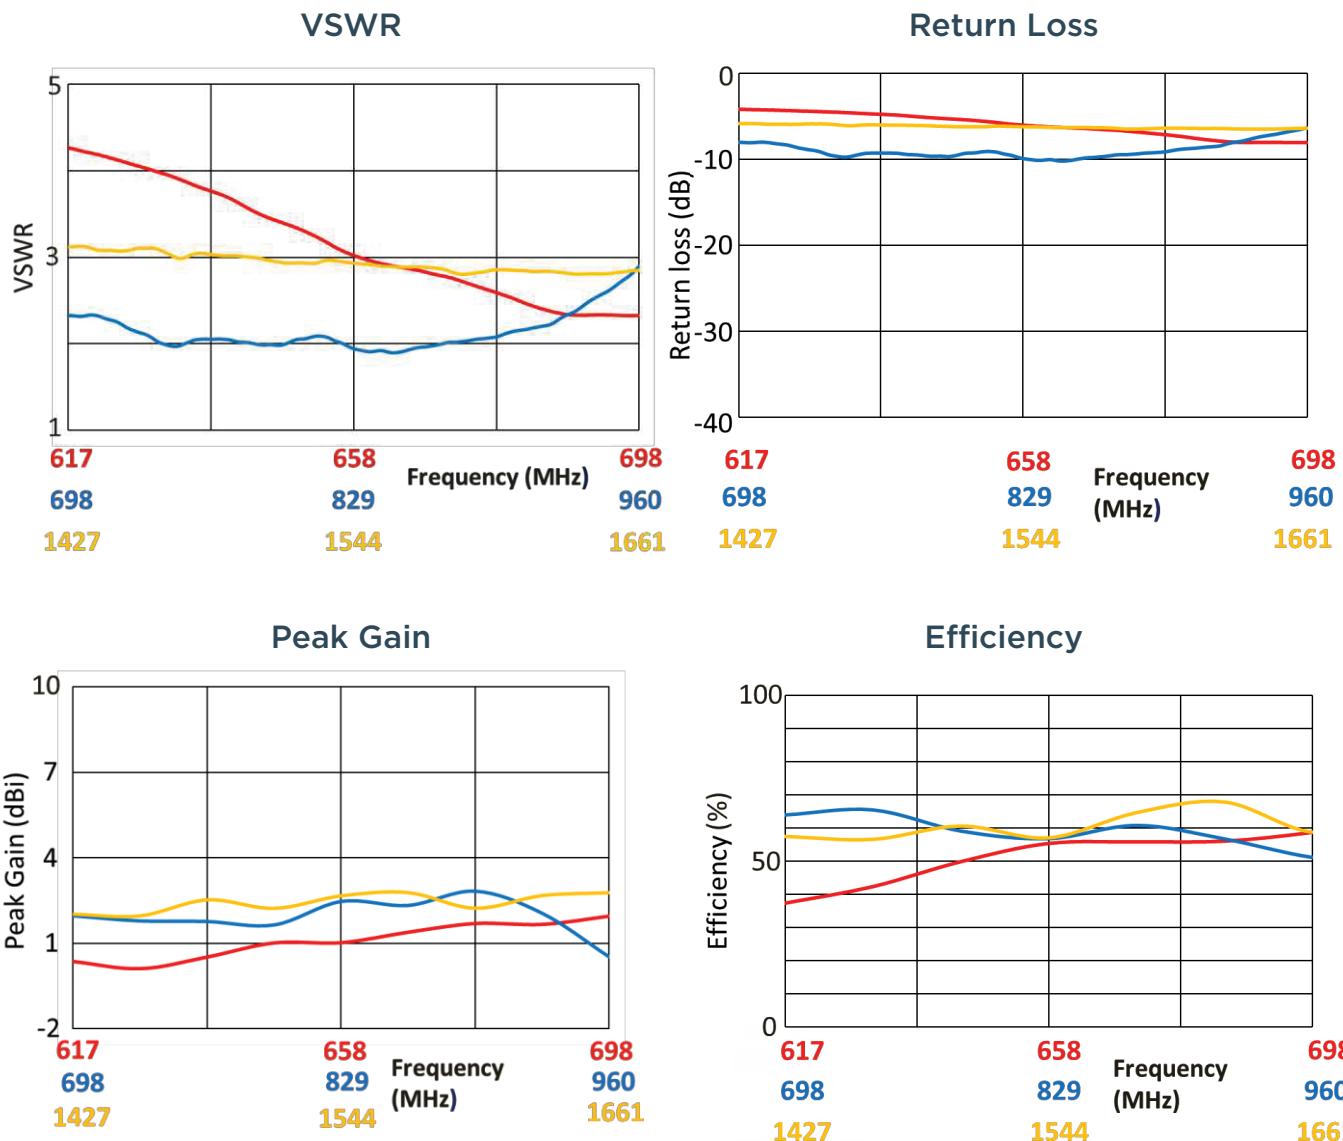





Data measured in free space and on reference ground plane of 150mm ground length and 55mm width, application data might vary.

**RF DATA (SHOWN AS L000657-1 : OTHERS CAN VARY WITH DIFFERENT GROUND LENGTHS.)**

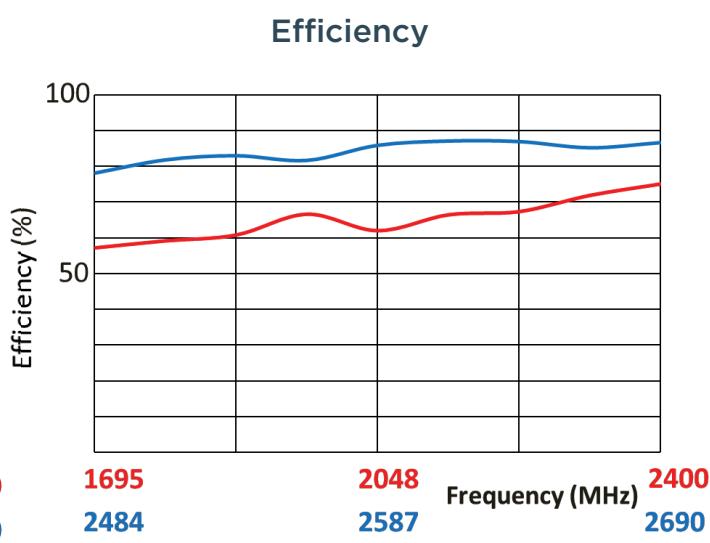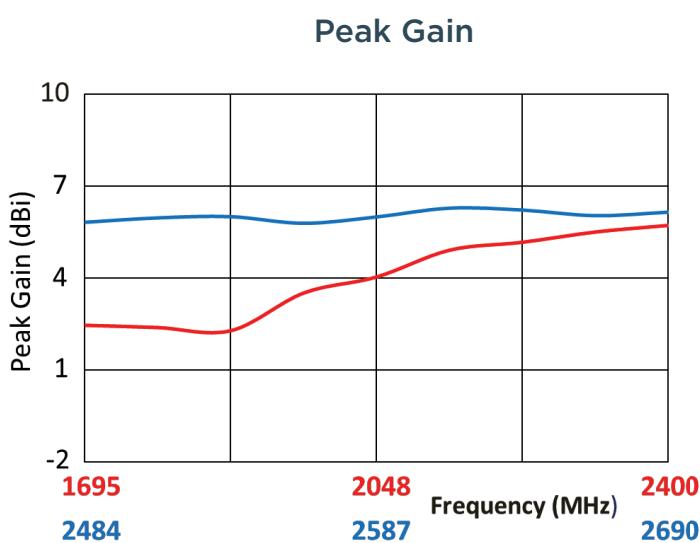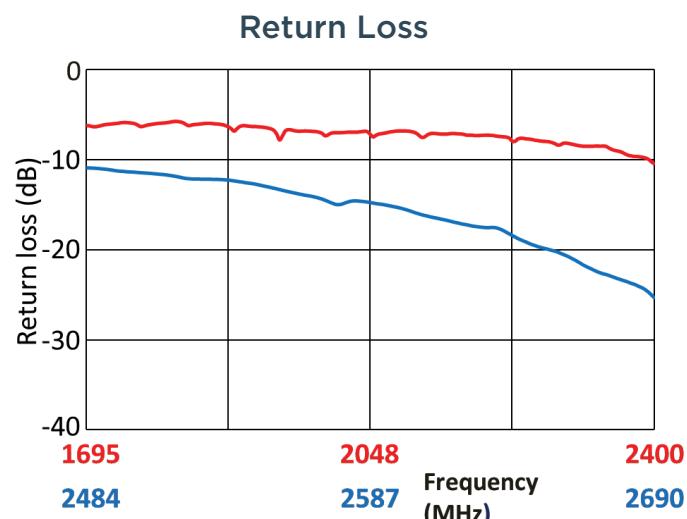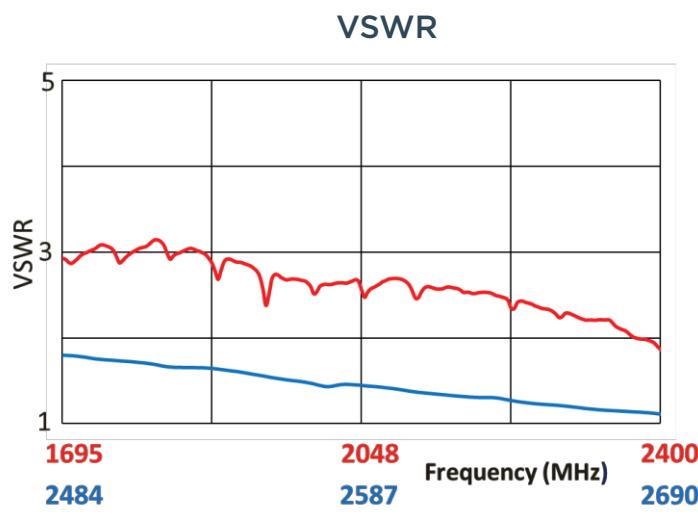

Data measured in free space and on reference ground plane of 150mm ground length and 55mm width, application data might vary.



**RF DATA (SHOWN AS L000657-1 : OTHERS CAN VARY WITH DIFFERENT GROUND LENGTHS.)**

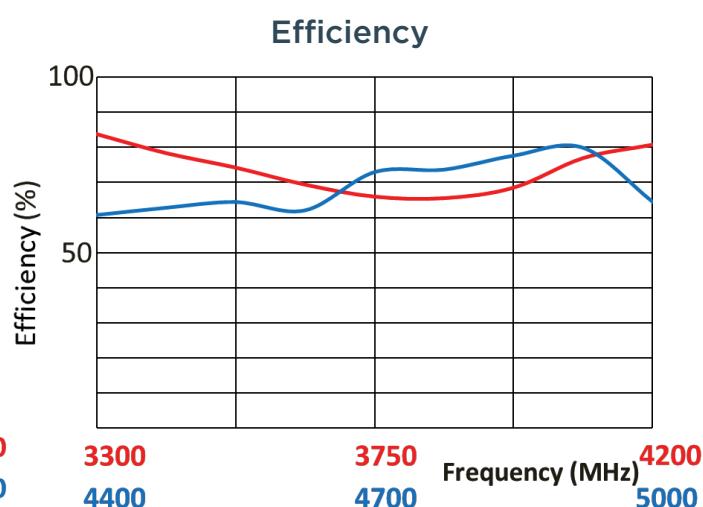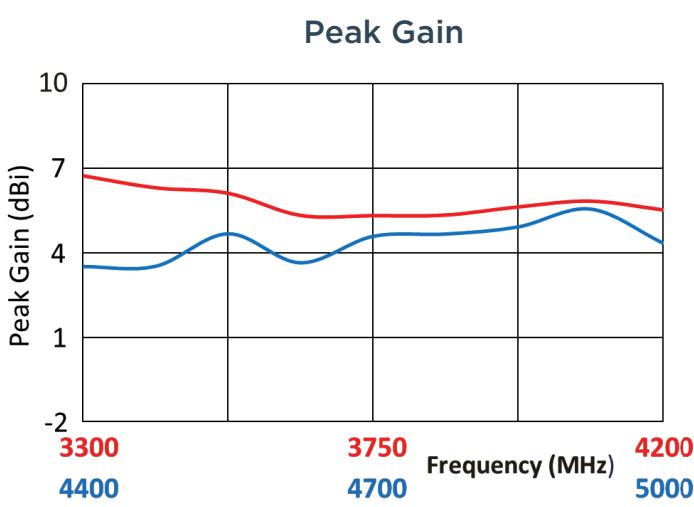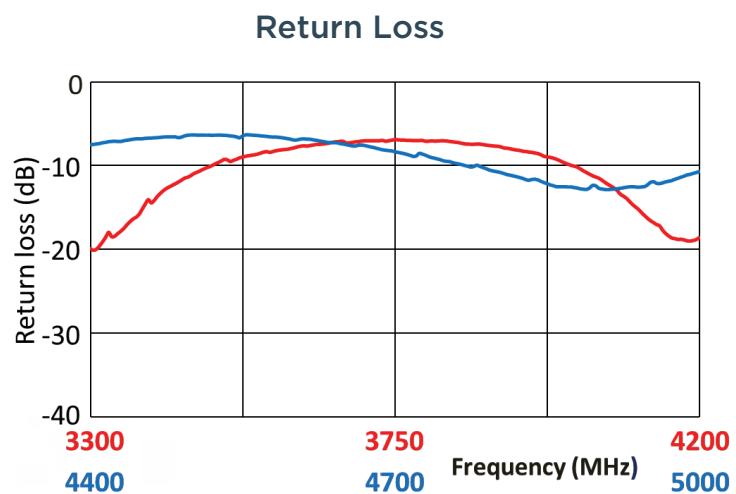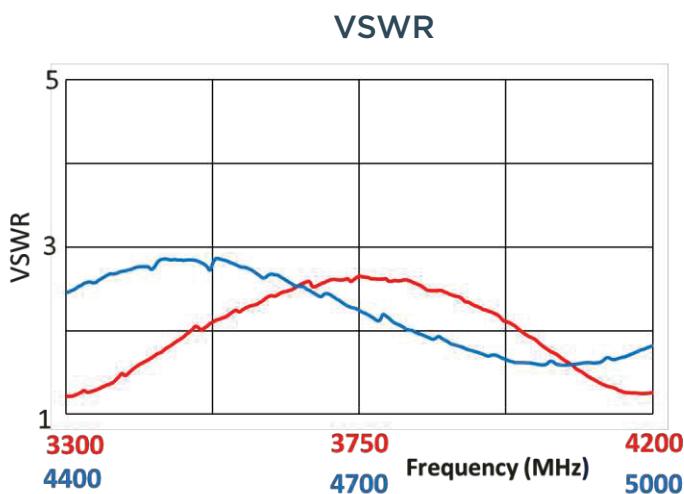

Data measured in free space and on reference ground plane of 150mm ground length and 55mm width, application data might vary.





**RF DATA (SHOWN AS L000657-1 : OTHERS CAN VARY WITH DIFFERENT GROUND LENGTHS.)**

Efficiency vs. Ground Length size

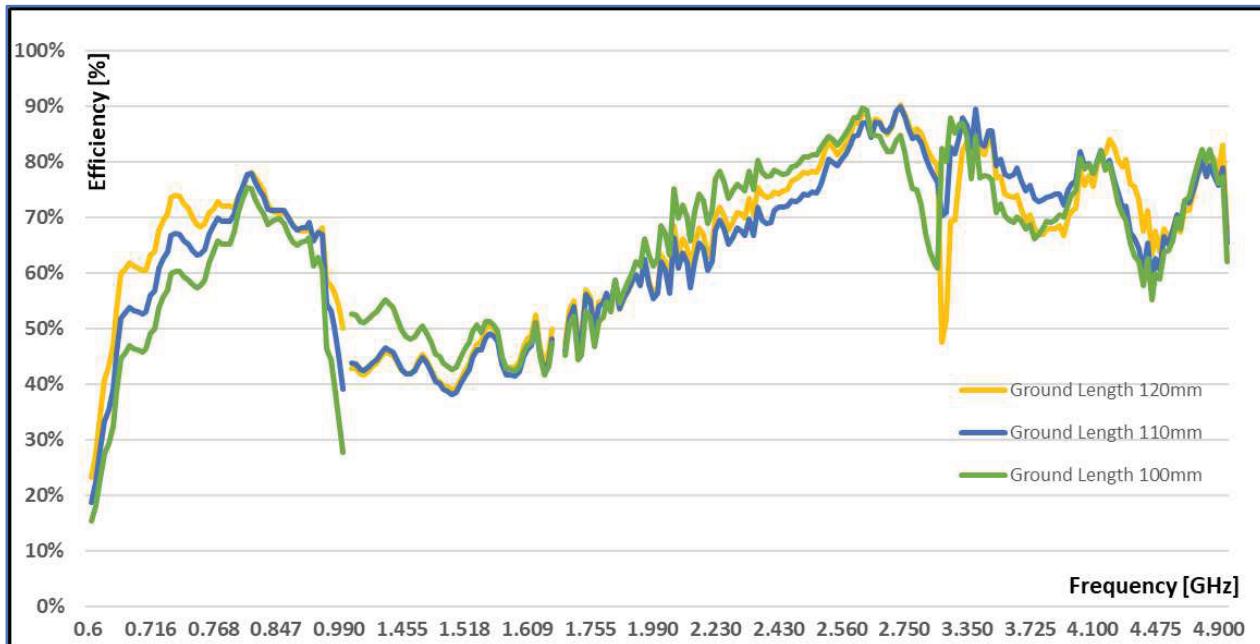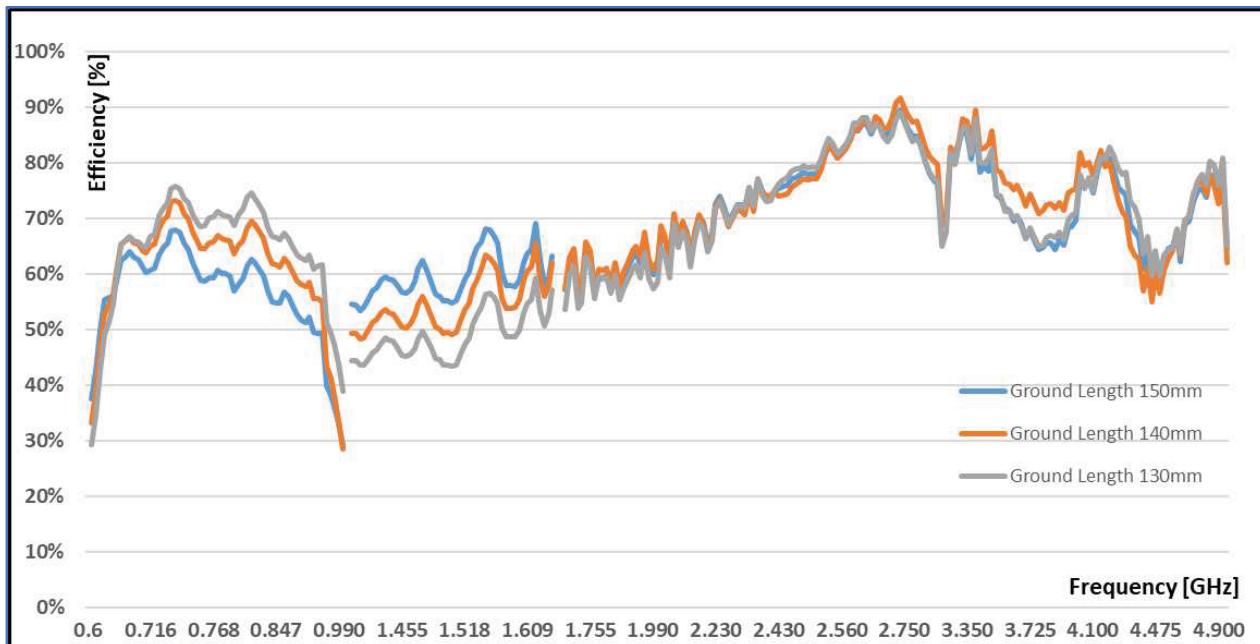

Data measured in free space and on reference ground plane of 150mm ground length and 55mm width, application data might vary.


## RADIATION PATTERN

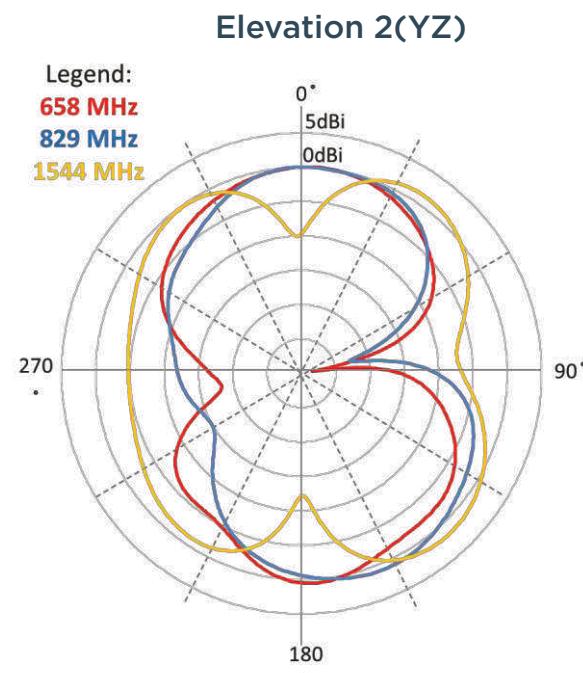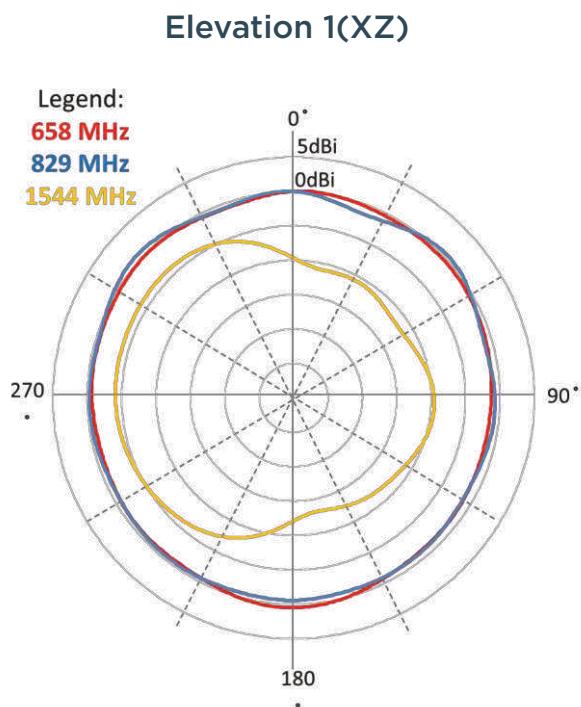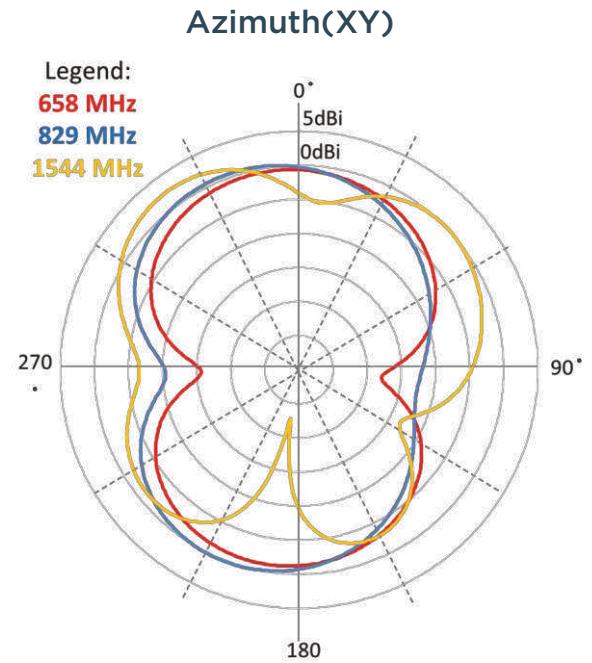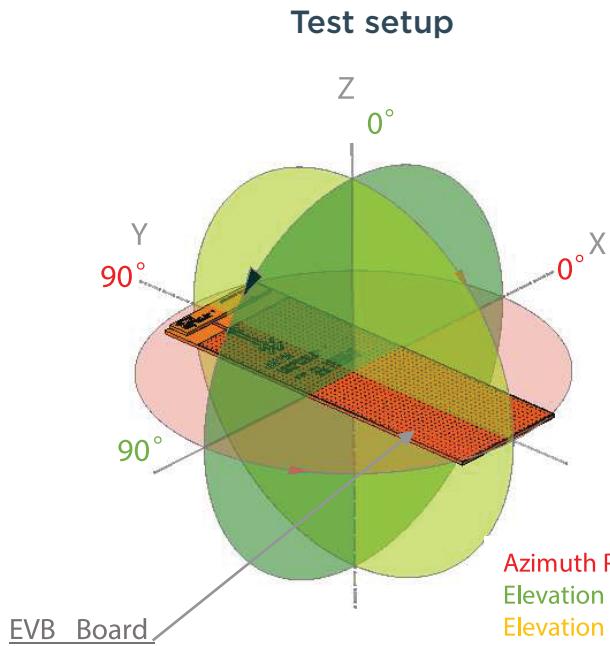


Data measured in free space and on reference ground plane of 150mm ground length and 55mm width, application data might vary.

## RADIATION PATTERN


Test setup

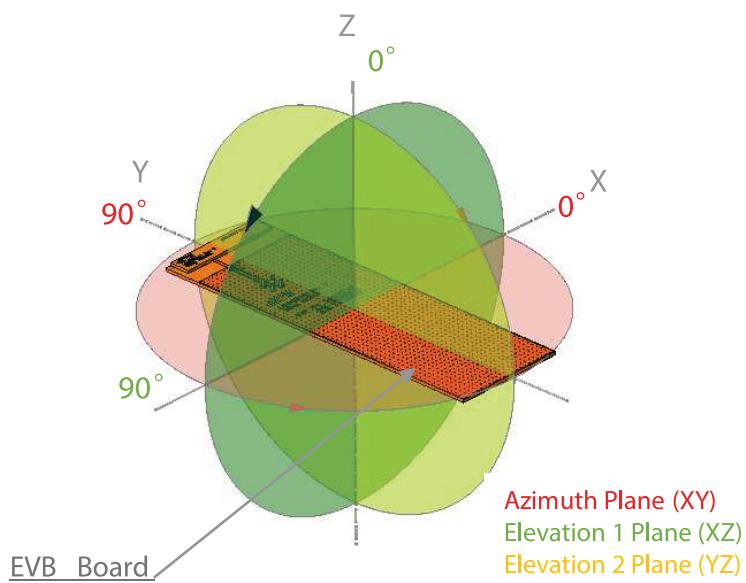


Azimuth(XY)

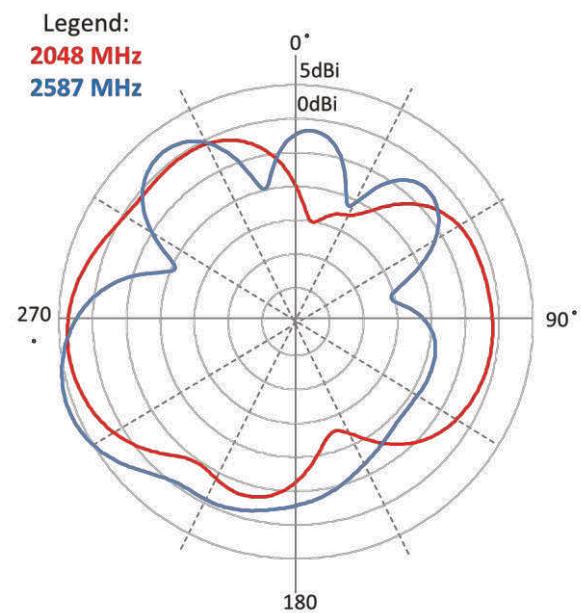

Elevation 1(XZ)

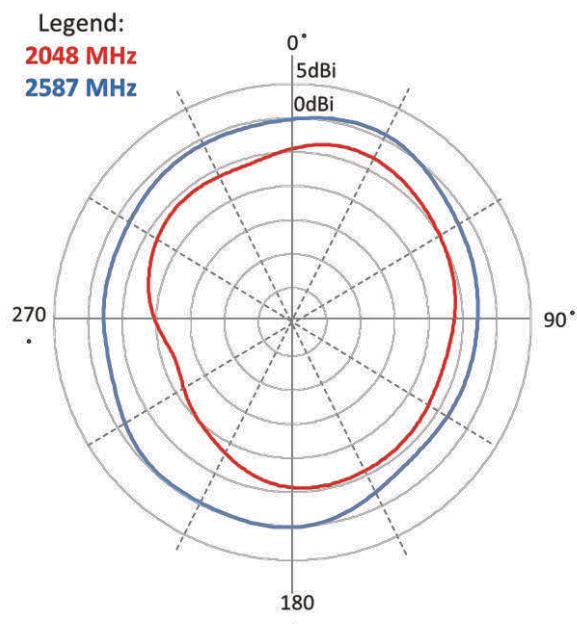


Elevation 2(YZ)

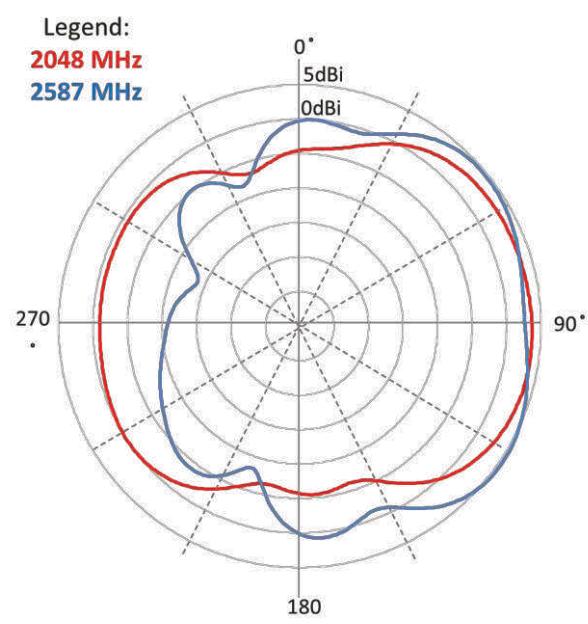


Data measured in free space and on reference ground plane of 150mm ground length and 55mm width, application data might vary.

## RADIATION PATTERN


Test setup

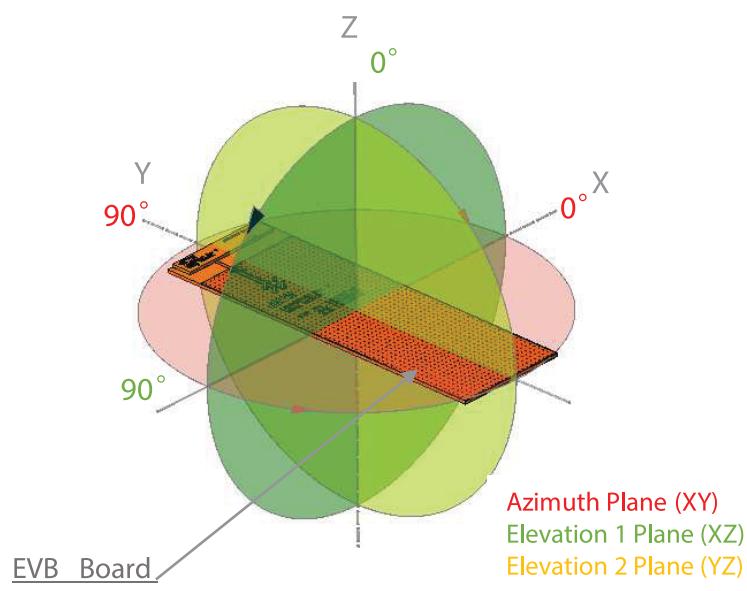


Azimuth(XY)

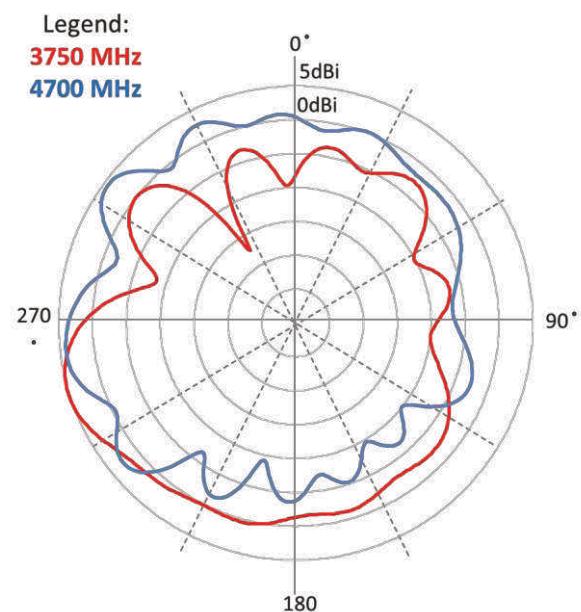

Elevation 1(XZ)

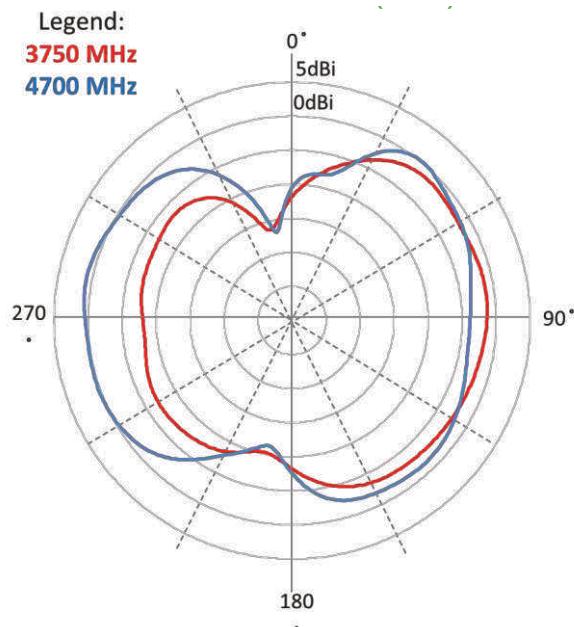


Elevation 2(YZ)

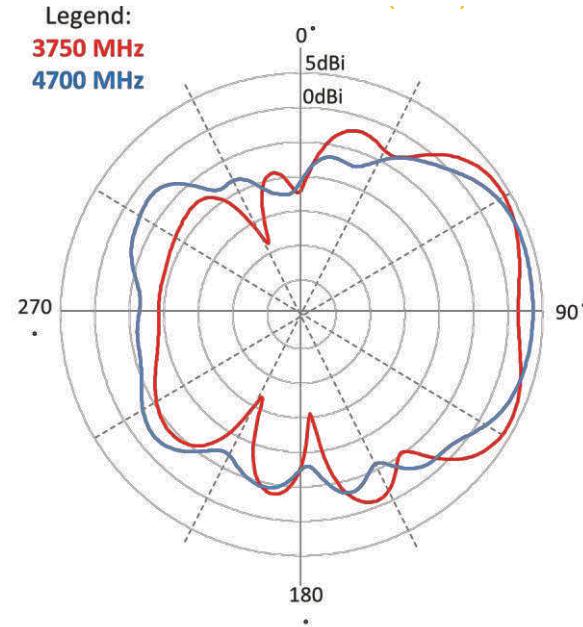

Data measured in free space and on reference ground plane of 150mm ground length and 55mm width, application data might vary.

## MOUNTING GUIDE

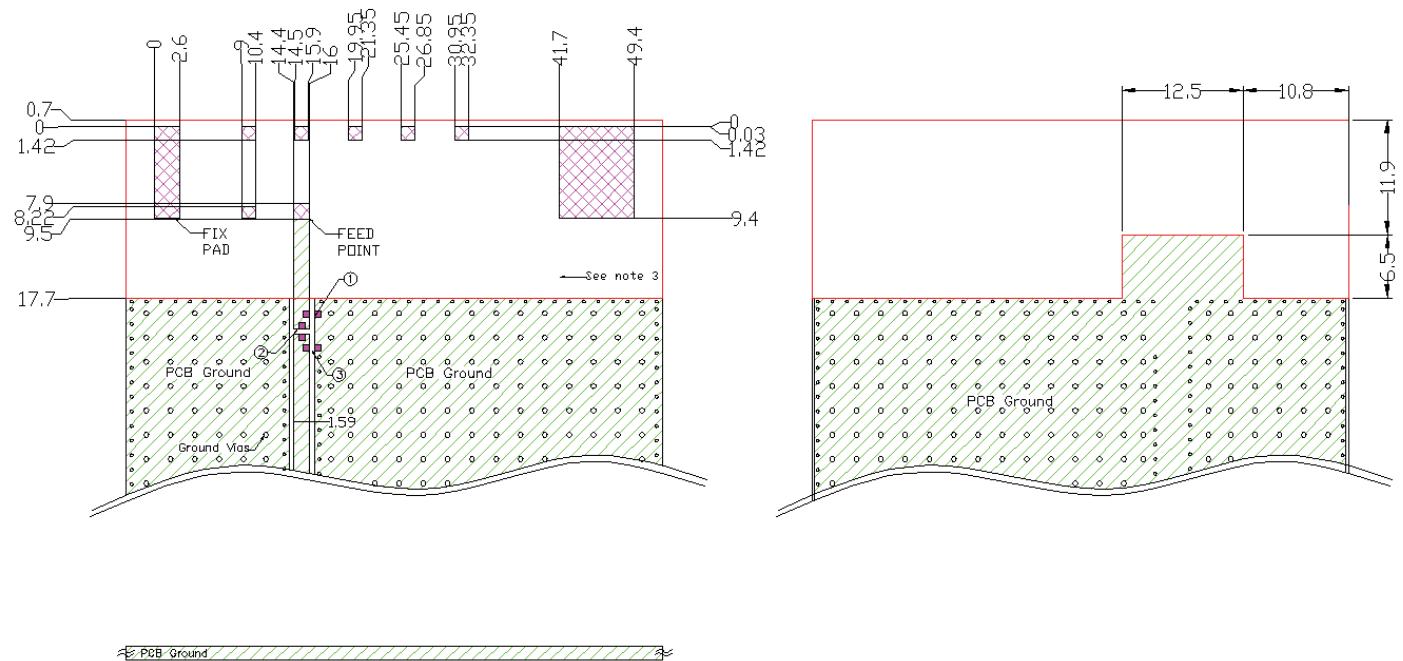

**NOTES:** 1. Antenna must be mounted on the edge of PCB.

Dimensions: mm

2. NC = Non connection (mechanical mounting pads).

Diagram is not to scale

3. No copper allowed in designated area on all PCB layers -


4. For more information please call TE.

5. Measured with below matching circuit condition.

① NC, ② 0 ohm, ③ 15nH

6. Reference PCB Dimension(mm) - 55.2 x 168.6 x 1.6

## KEEP OUT AREA

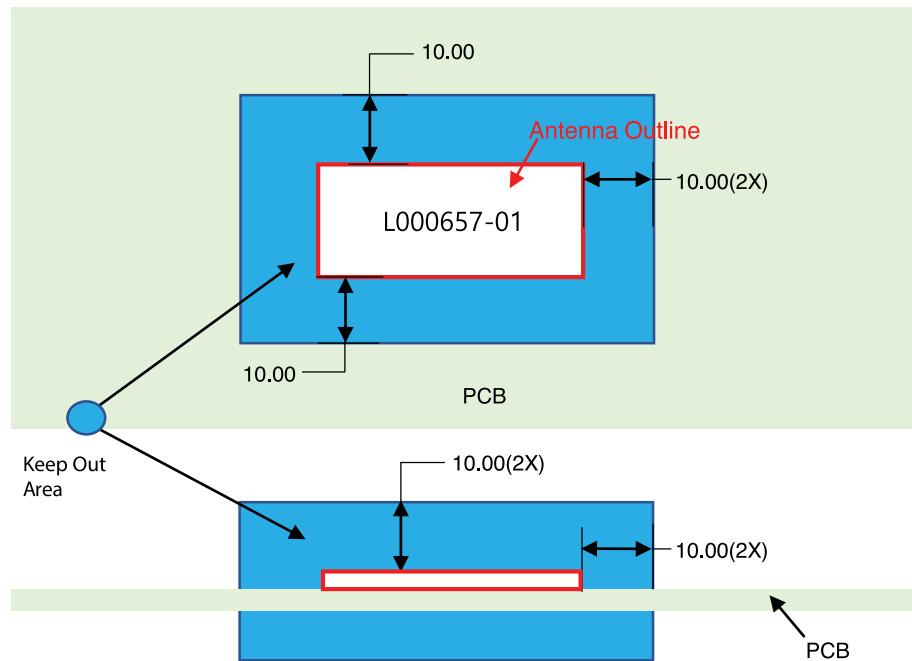

NOTES: 1. Antenna designed to be mounted on PCB.


Dimensions: mm

2. Area in blue above indicates Keep Out Area.

Diagram is not to scale


3. For more information please call TE.

## DIMENSIONS

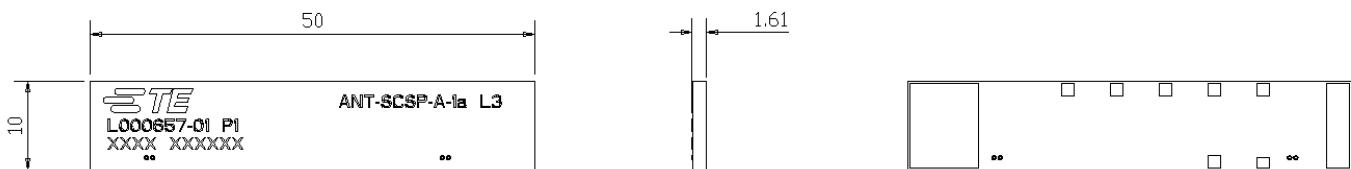


## PACKAGING

### L000657-01 (TAPE & REEL)

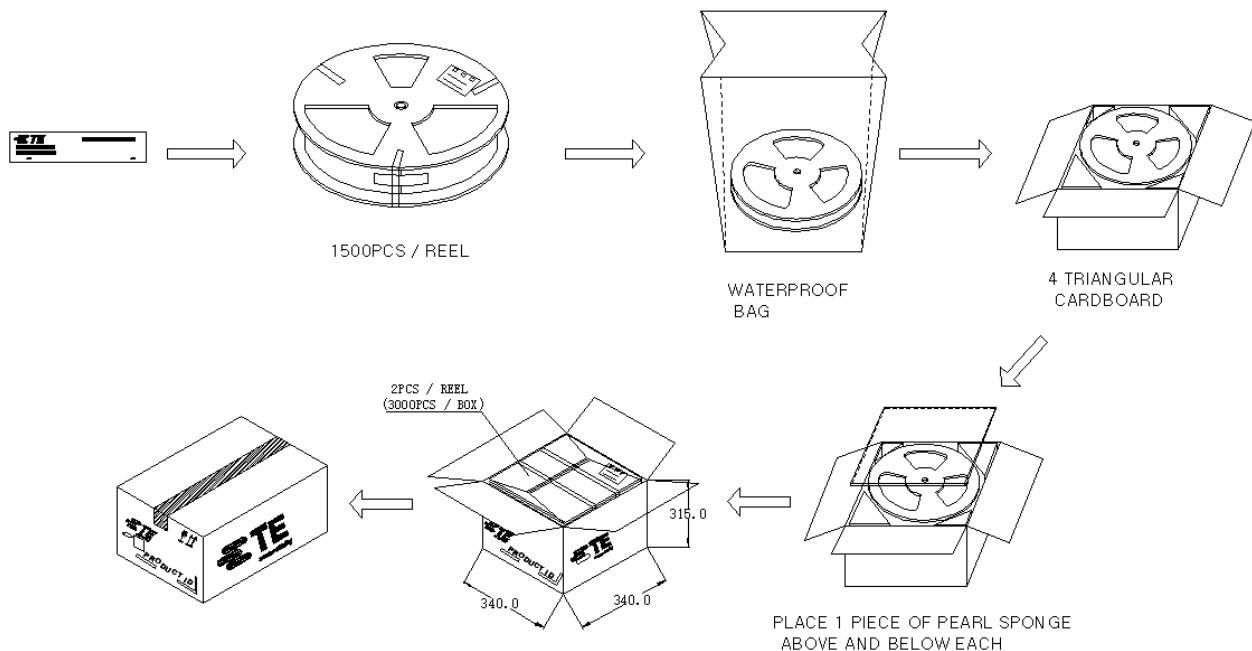

### L000657-80 (BULK)

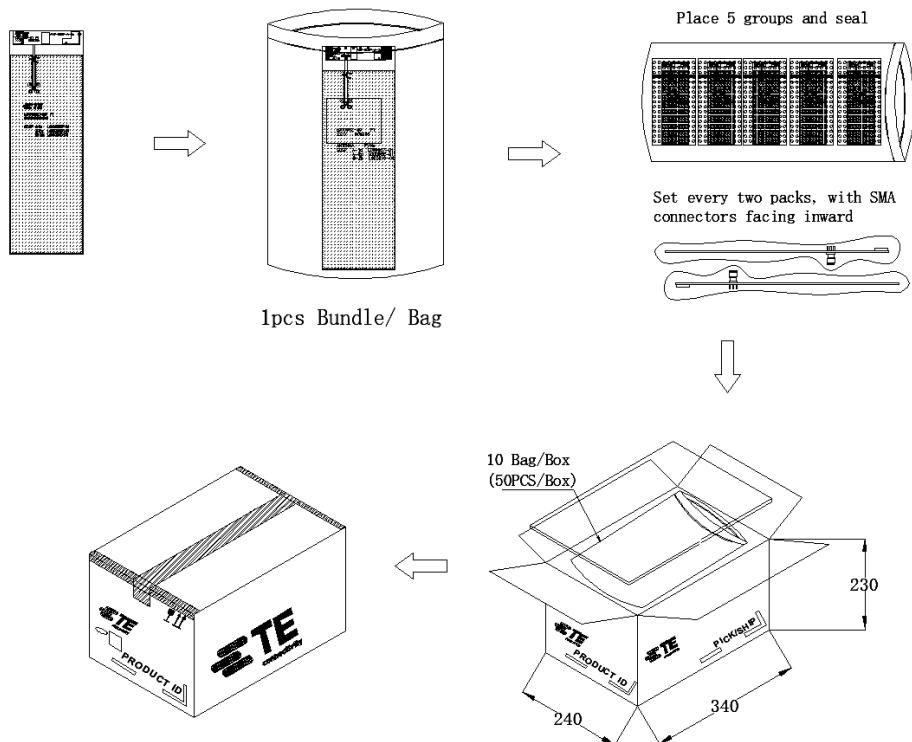

**TE TECHNICAL SUPPORT CENTER**

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

For phone numbers in other countries, go to [te.com/support-center](http://te.com/support-center)

**te.com**

TE, TE Connectivity, TE connectivity (logo), and SplatCh are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2024 TE Connectivity. All Rights Reserved.

Revised 05-24

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Antennas](#) category:***

***Click to view products by [TE Connectivity](#) manufacturer:***

Other Similar products are found below :

[108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#)  
[GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#)  
[NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [A21H0](#) [29000863](#) [29000848](#) [955179003](#) [22100003](#) [DL-T022-2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#)  
[J008-GSM](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KH-GPS181804-WY](#) [TX5800-JZ-5](#) [3E0402BK-004](#) [3E0301BK-006](#) [PRO-OB-440](#)  
[ACR0301U](#) [BWGNSCNX9-9B1Y4L120](#) [BWGPSCNX20-20B1Y4L120](#) [DL-J023-5GB](#) [3N0101BK-017](#)