

Low I_q Supply Voltage Supervisory in SOT23-3

FEATURES

- Operating Supply Voltage: 1.0V to 5.5V
- $\pm 2\%$ Reset Threshold Accuracy
- Low Quiescent current: $5\mu A$ (typically)
- Push-Pull Active Low RESET output
- 240ms Power-On Reset Delay
- Reset Output Drive Current: 3mA
- 3-Pin SOT23-3 Package

APPLICATIONS

- Digital Set Top Boxes
- TV
- Portable Device
- Microprocessor Systems

GENERAL DESCRIPTION

The TMI6809 series device are low I_q supply voltage supervisory that monitors a single voltage used in microprocessor and digital control system. The TMI6809 provide an active low reset signal while the VCC supply voltage drops below the reset threshold voltage. When the VCC supply voltage rises above the threshold voltage plus hysteresis the reset output goes high after 240ms (typical) reset delay time.

TMI6809 series are available suitable for monitoring 3V, 3.3V and 5V supply voltages. The low supply current of typical $5\mu A$ makes TMI6809 series devices ideal for using in portable, battery powered system applications, and they are available in 3-pin SOT23-3 package.

TYPICAL APPLICATION

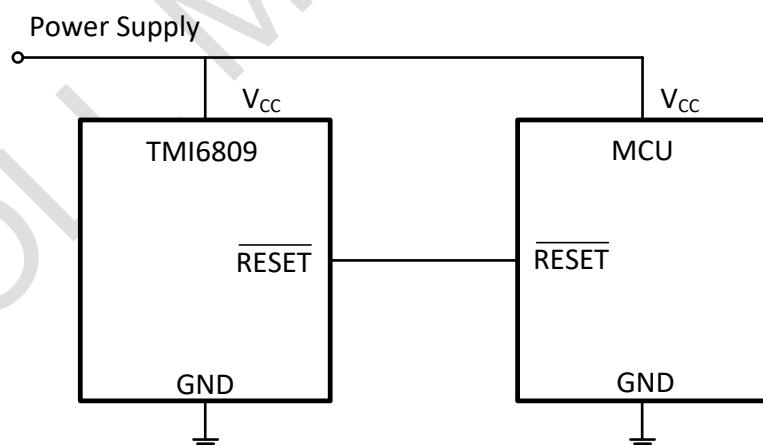
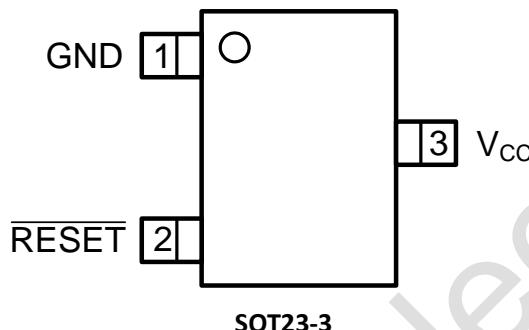


Figure 1. Typical Application Circuits

ABSOLUTE MAXIMUM RATINGS (Note 1)

Parameter	Value	Unit
Input Supply Voltage	-0.3~6	V
RESET Voltage	-0.3~6	V
Storage Temperature Range	-50~150	°C
Junction Temperature (Note2)	-40~150	°C
Power Dissipation	300	mW

PACKAGE/ORDER INFORMATION


SOT23-3

Top Mark: TxxXXX (Txx: Device Code, XXX: Inside Code)

Part Number	Reset Threshold	Package	Top mark	Quantity/ Reel
TMI6809-232	2.32V	SOT23-3	T3QXXX	3000
TMI6809-263	2.63V	SOT23-3	T6RXXX	3000
TMI6809-293	2.93V	SOT23-3	T9SXXX	3000
TMI6809-308	3.08V	SOT23-3	T0TXXX	3000
TMI6809-400	4.00V	SOT23-3	T0JXXX	3000
TMI6809-438	4.38V	SOT23-3	T3MXXX	3000
TMI6809-463	4.63V	SOT23-3	T6LXXX	3000

TMI6809 series devices are Pb-free and RoHS compliant.

PIN FUNCTIONS

Pin	Name	Function
1	GND	Ground Pin.
2	RESET	Active low reset output pin.
3	V _{CC}	Power supply voltage that is monitored.

ESD RATING

Items	Description	Value	Unit
V _{ESD_HBM}	Human Body Model for all pins	±4000	V
V _{ESD_CDM}	Charge Device Model for all pins	±2000	V

JEDEC specification JS-001

RECOMMENDED OPERATING CONDITIONS

Items	Description	Min	Max	Unit
Voltage Range	V _{CC}	1.0	5.5	V
T _J	Operating Junction Temperature Range	-40	125	°C

ELECTRICAL CHARACTERISTICS

($1.0V < V_{IN} < 5.5V$, $T_A = 25^\circ C$, unless otherwise noted.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		1.0		5.5	V
Input Supply Quiescent Current	I_Q		1	5	16	μA
$\overline{\text{RESET}}$ Voltage Threshold	V_{TH}	TMI6809-232	2.28	2.32	2.36	V
		TMI6809-263	2.58	2.63	2.68	V
		TMI6809-293	2.87	2.93	2.98	V
		TMI6809-308	3.02	3.08	3.14	V
		TMI6809-400	3.92	4.00	4.08	V
		TMI6809-438	4.29	4.38	4.46	V
		TMI6809-463	4.54	4.63	4.72	V
$\overline{\text{RESET}}$ Voltage Threshold Temperature Coefficient				30		ppm/ $^\circ C$
V_{CC} to $\overline{\text{RESET}}$ Delay Time	T_{PD_VCC}	$V_{CC}=V_{TH}$ to $V_{TH} - 100mV$		20		μs
$\overline{\text{RESET}}$ Active Timeout Delay	T_D	$T_A=25^\circ C$	210	240	270	ms
		$T_A=-40^\circ C$ to $125^\circ C$ (Note3)	160	240	320	ms
$\overline{\text{RESET}}$ Low-level Output Voltage	V_{OL}	$V_{CC} = V_{TH} - 0.5V$, $I_{O_sink} = 1mA$			0.3	V
$\overline{\text{RESET}}$ High-level Output Voltage	V_{OH}	$V_{CC} = V_{TH} + 0.5V$, $I_{O_source} = 1mA$	$V_{CC} - 0.3$			V
$\overline{\text{RESET}}$ Output Voltage Sink Current	I_{OL}	$V_{CC} = 2V$, $V_{\overline{\text{RESET}}} = 3V$ TMI6809-263		15		mA
$\overline{\text{RESET}}$ Output Voltage Source Current	I_{OH}	$V_{CC} = 3V$, $V_{\overline{\text{RESET}}} = 0V$ TMI6809-263		30		mA

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: T_J is calculated from the ambient temperature T_A and power dissipation P_D according to the following formula: $T_J = T_A + (P_D) \times \theta_{JA}$.

Note 3: Guaranteed by design and production trimming.

FUNCTIONAL BLOCK DIAGRAM

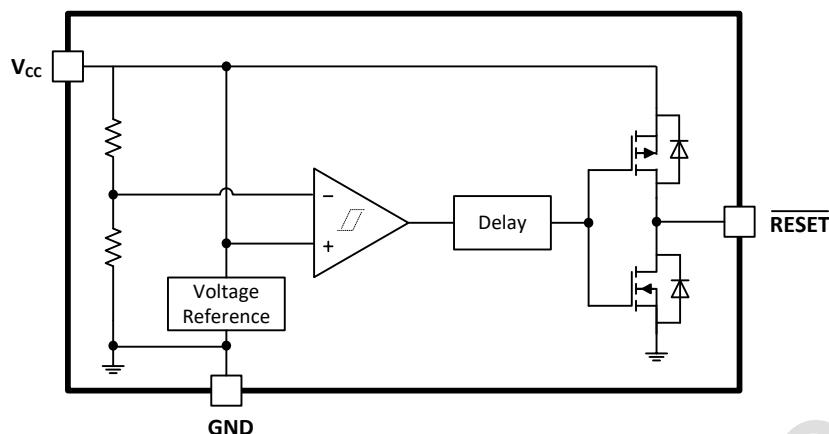


Figure 2. TMI6809 Block Diagram

V_{CC} \overline{RESET} TIMING


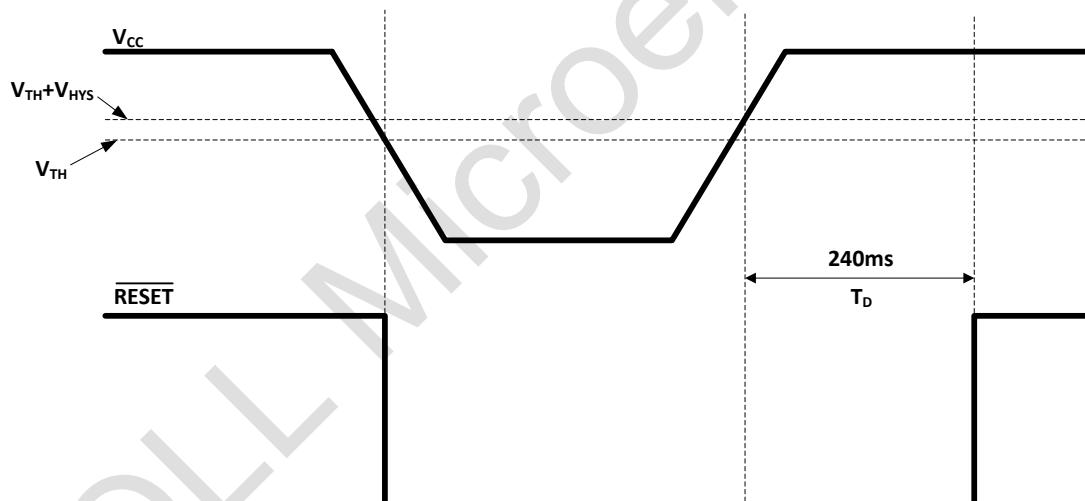


Figure 3. TMI6809 V_{CC} Reset Timing

PACKAGE INFORMATION

SOT23-3

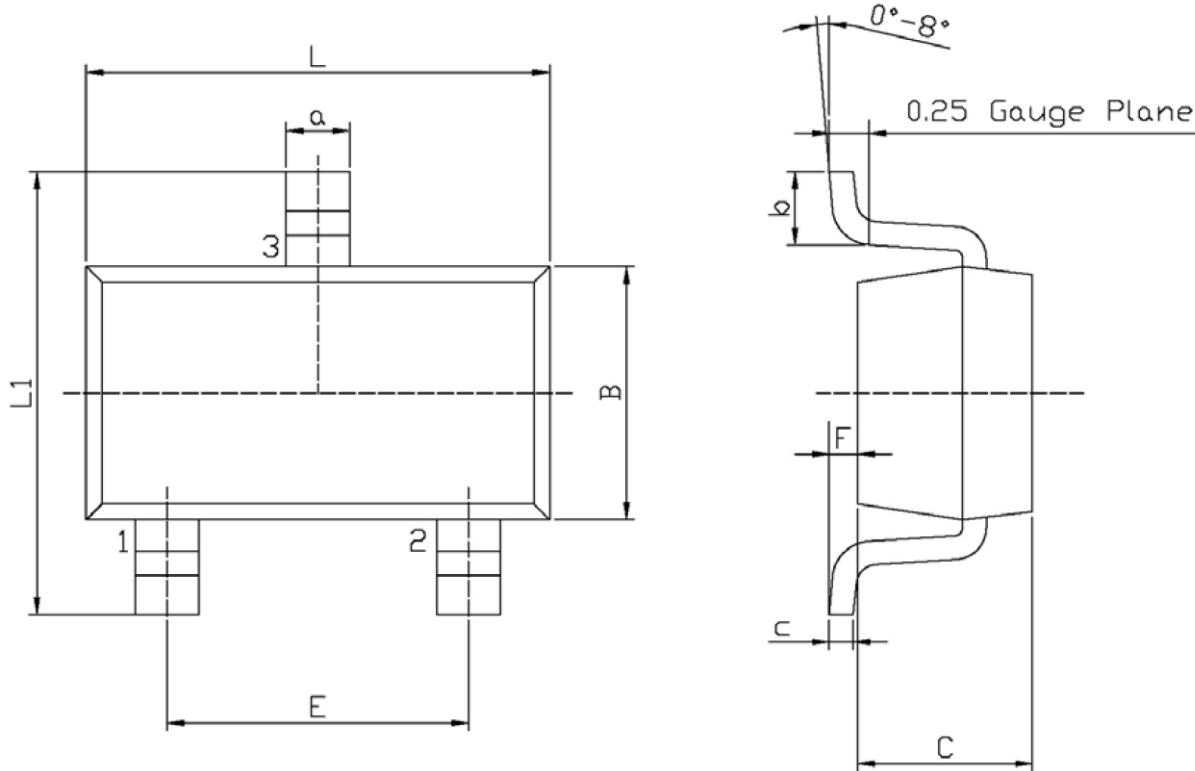

Unit: mm


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.82	3.02	a	0.35	0.50
B	1.50	1.70	c	0.10	0.20
C	0.90	1.30	b	0.30	0.55
L1	2.60	3.00	F	0	0.15
E	1.80	2.00			

Note:


- 1) All dimensions are in millimeters.
- 2) Package length does not include mold flash, protrusion or gate burr.
- 3) Package width does not include inter lead flash or protrusion.
- 4) Lead popularity (bottom of leads after forming) shall be 0.10 millimeters max.

TAPE AND REEL INFORMATION

TAPE DIMENSIONS:

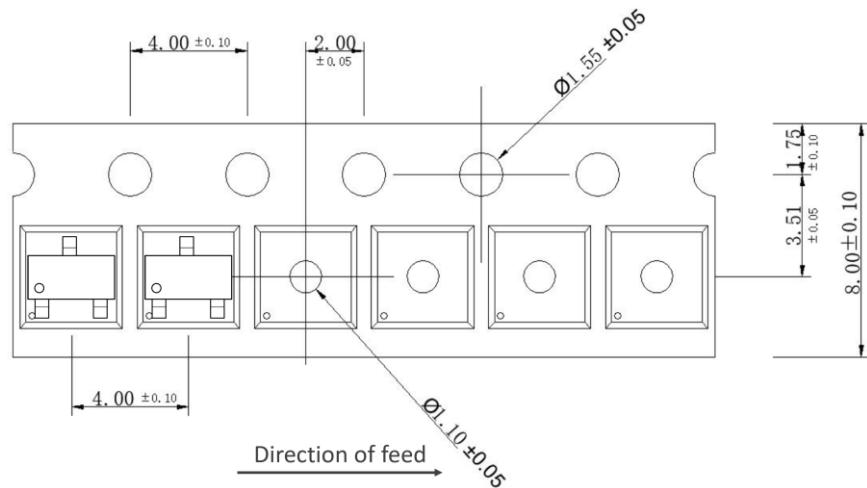

REEL DIMENSIONS:

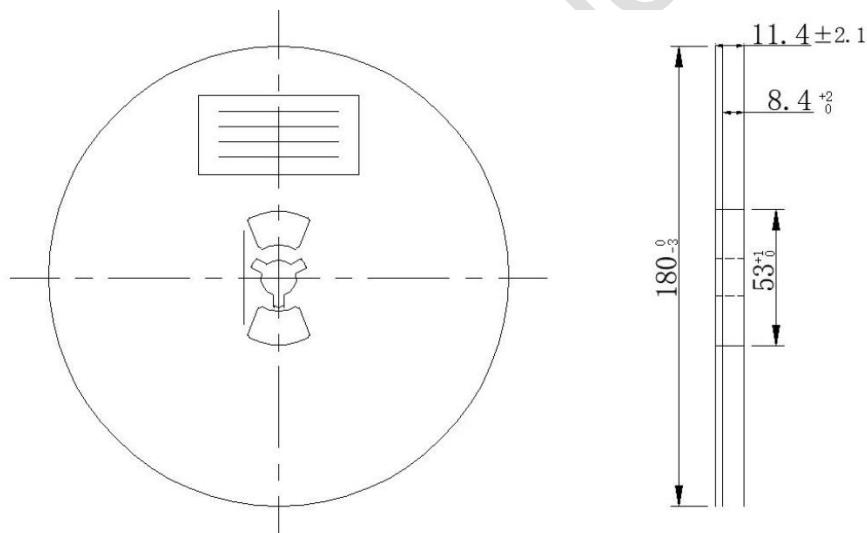

Note:

- 1) All Dimensions are in Millimeter
- 2) Quantity of Units per Reel is 3000
- 3) MSL level is level 3.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Supervisory Circuits category:

Click to view products by TMI manufacturer:

Other Similar products are found below :

[NCP304LSQ40T1G](#) [CAT1161LI-25-G](#) [CAT853STBI-T3](#) [CAT1026LI-30-G](#) [CAT1320LI-25-G](#) [TC54VN2402EMB713](#) [MCP1316T-44NE/OT](#)
[MCP1316MT-45GE/OT](#) [MCP1316MT-23LI/OT](#) [DS1232L](#) [NCV302HSN45T1G](#) [MCP1316T-23LI/OT](#) [PT7M6130NLTA3EX](#) [S-1000N28-I4T1U](#) [CAT1161LI-28-G](#) [MCP1321T-29AE/OT](#) [MCP1319MT-47QE/OT](#) [S-1000N23-I4T1U](#) [S-1000N19-I4T1U](#) [CAT824UTDI-GT3](#)
[PT7M6133NLTA3EX](#) [PT7M6127NLTA3EX](#) [BD48L29G-TL](#) [BD48E23G-TR](#) [BD48E49G-TR](#) [BD48E52G-TR](#) [MIC1832MY](#)
[MP6412GQGU-Z](#) [BD52W01G-CTR](#) [BD52W05G-CTR](#) [BD70H12G-2CTR](#) [XC61GN2502HR-G](#) [MB3793-37APNF-G-JN-ER6E1](#) [CPC5712U](#)
[LTC693CSW](#) [TC1232EOE](#) [TC1270ALVRCTR](#) [TC1271MERCTR](#) [TC32MEZB](#) [TC54VC4202EMB713](#) [TC54VN2102ECB713](#) [MB3793-27DPNF-G-JN-ERE1](#)
[MCP100-475HI/TO](#) [MCP100-485DI/TO](#) [MCP101-460HI/TO](#) [MCP101-475HI/TO](#) [TCM809LVLB713](#)
[TCM809SVLB713](#) [MCP102-315E/TO](#) [MCP111-475E/TO](#)