


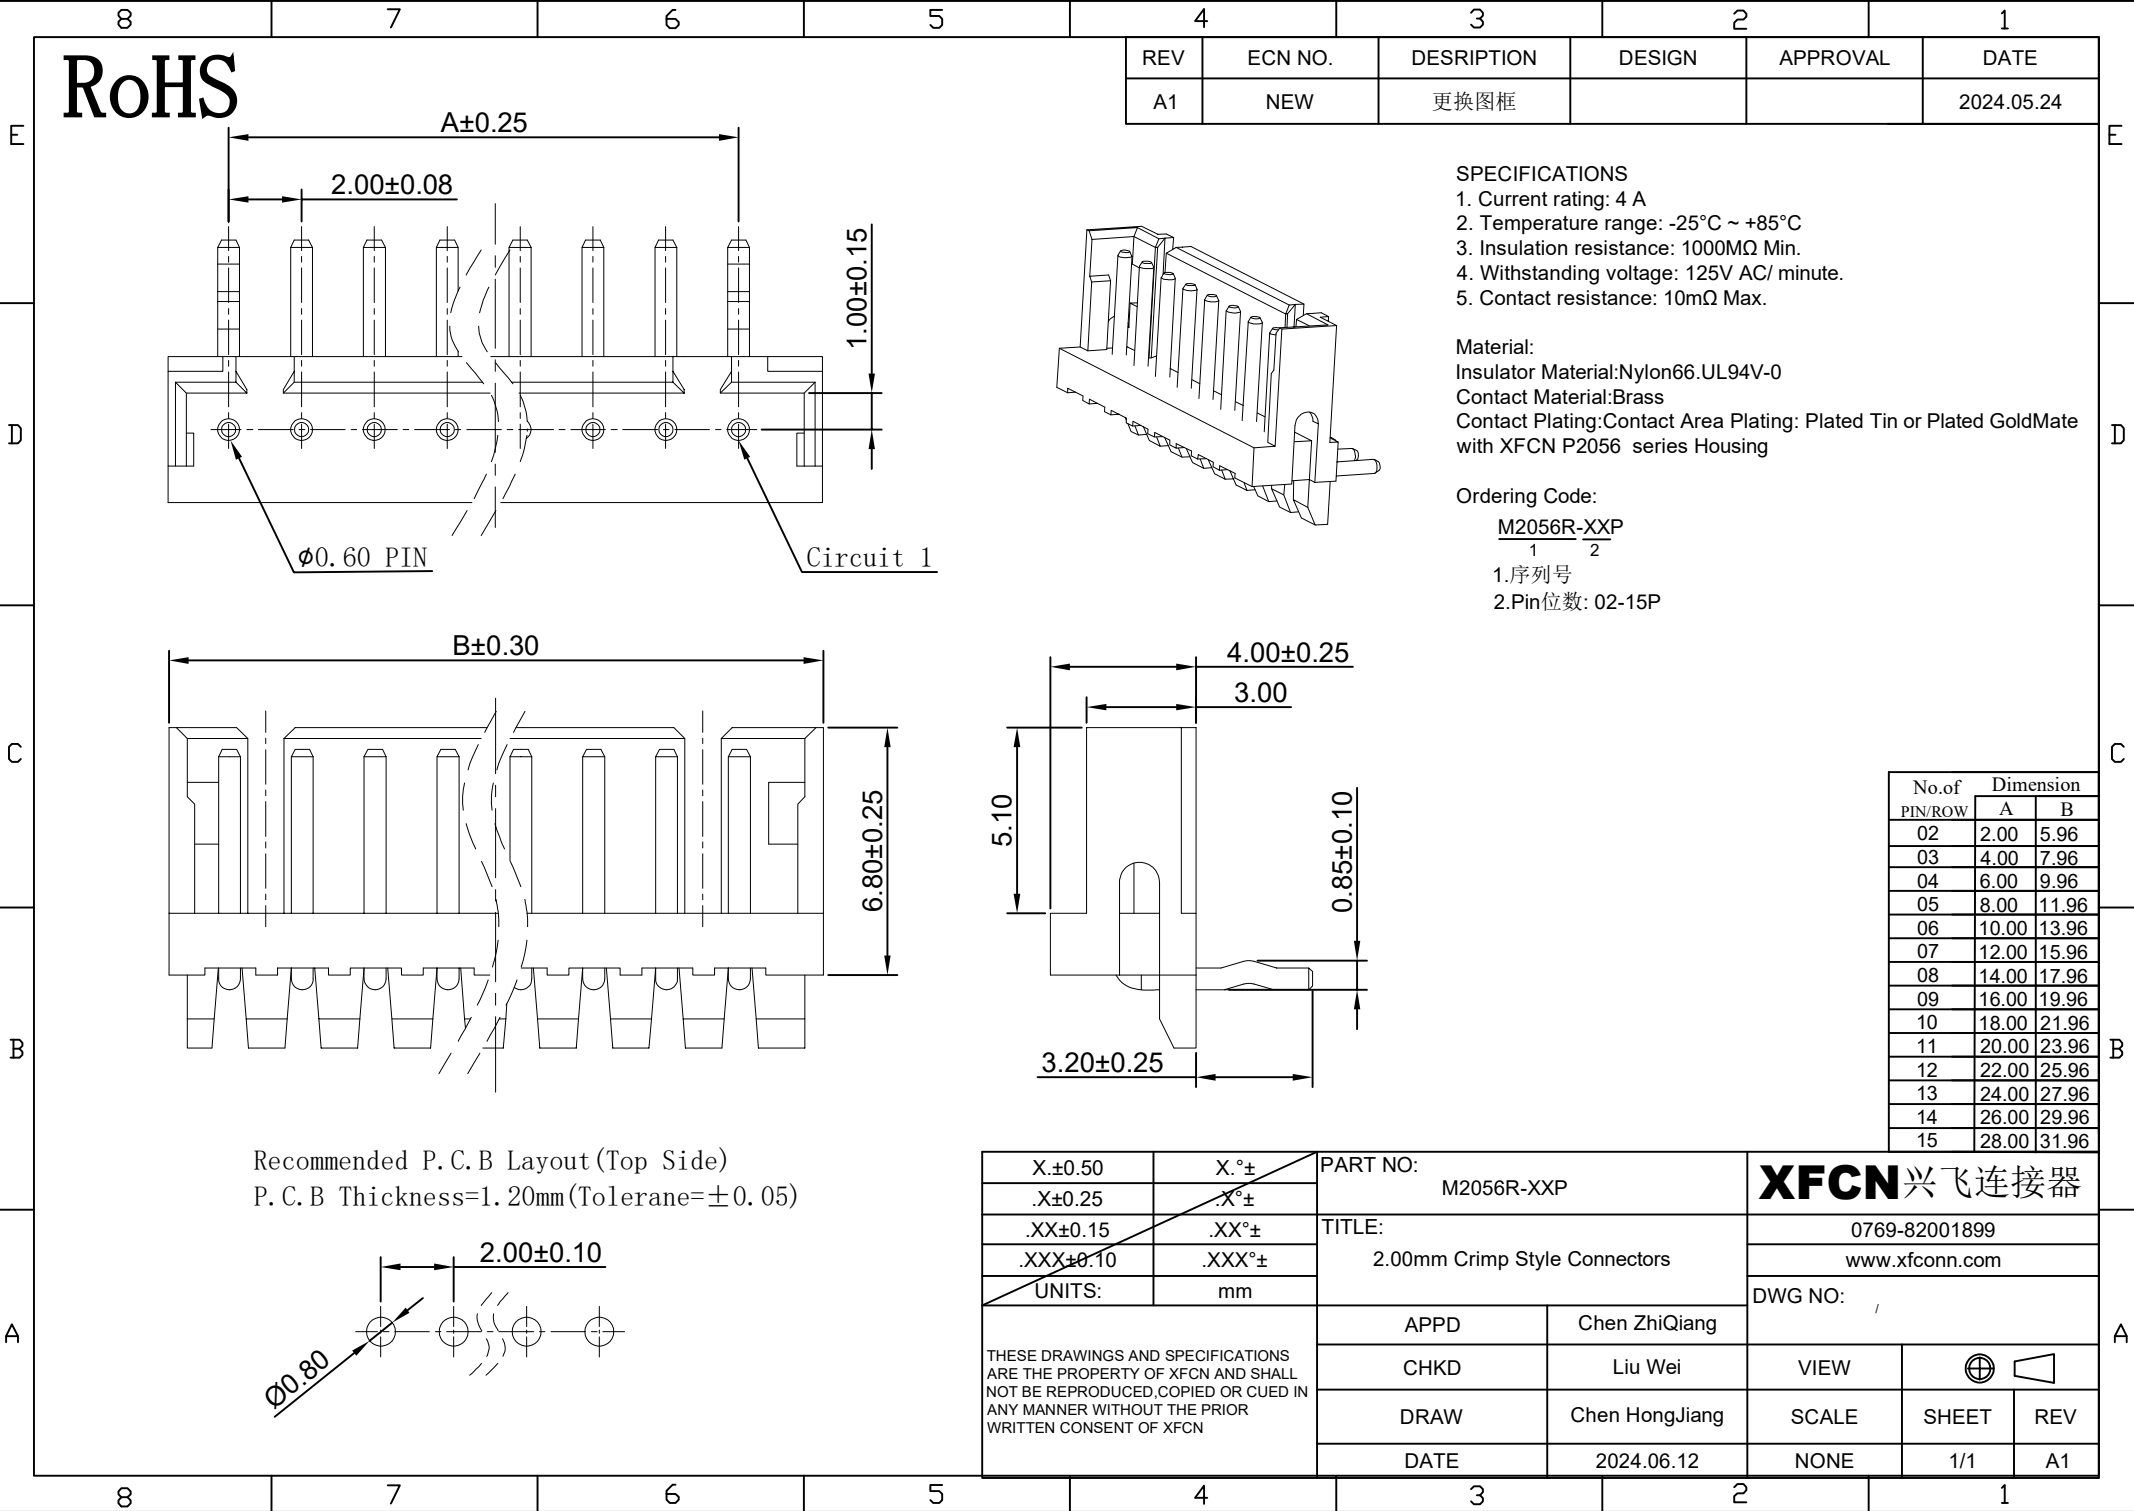

RoHS

A±0.25

2.00±0.08

1.00±0.15

Ø0.60 PIN

Circuit 1

B±0.30

6.80±0.25

4.00±0.25

3.00


5.10

0.85±0.10

3.20±0.25

Recommended P.C.B Layout (Top Side)
P.C.B Thickness=1.20mm (Tolerance=±0.05)

2.00±0.10

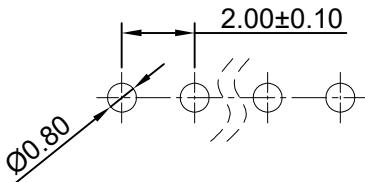

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN	

PART NO: M2056R-XXP		XFCN 兴飞连接器		
TITLE: 2.00mm Crimp Style Connectors		0769-82001899		
		www.xfconn.com		
		DWG NO: /		
APPD	Chen ZhiQiang	VIEW		
CHKD	Liu Wei	SCALE	SHEET	REV
DATE	2024.06.12	NONE	1/1	A1

SPECIFICATIONS

1. Current rating: 4 A
2. Temperature range: -25°C ~ +85°C
3. Insulation resistance: 1000MΩ Min.
4. Withstanding voltage: 125V AC/ minute.
5. Contact resistance: 10mΩ Max.

Material:

Insulator Material: Nylon66. UL94V-0

Contact Material: Brass

Contact Plating: Contact Area Plating: Plated Tin or Plated Gold
Mate with XFCN P2056 series Housing

Ordering Code:

M2056R-XXP
1 2

1. 序列号

2. Pin位数: 02-15P

No. of PIN/ROW	Dimension	
	A	B
02	2.00	5.96
03	4.00	7.96
04	6.00	9.96
05	8.00	11.96
06	10.00	13.96
07	12.00	15.96
08	14.00	17.96
09	16.00	19.96
10	18.00	21.96
11	20.00	23.96
12	22.00	25.96
13	24.00	27.96
14	26.00	29.96
15	28.00	31.96

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [XFCN](#) ***manufacturer:***

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)
[821-22-002-10-001101](#) [821-22-003-10-002101](#)