




IF Transformers

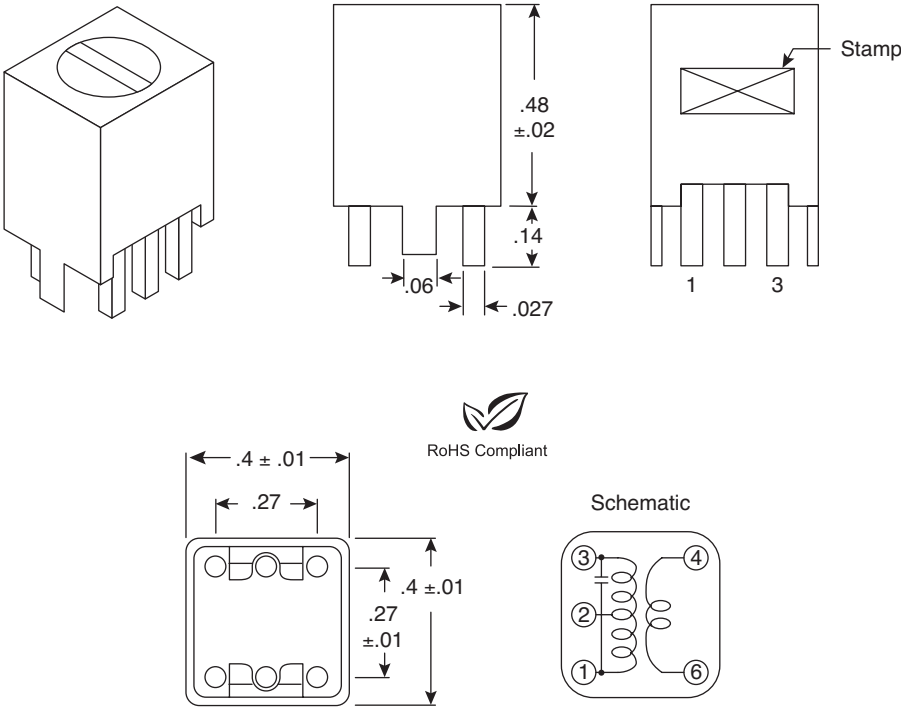

Dimensions (in.)

■ SPECIFICATIONS

- Type: Sub-miniature
- Mounting: PC
- RoHS Compliant

Mouser Stock No.	Application (Typical) (IF)	Impedance		Unload Q Value	Tuning Capacitance	Inductance	Turns			Cap Color
		Pri.	Sec.				(1-2)	(2-3)	(4-6)	
Center Frequency: 455KHz ±3%										
42IF101-RC	1st	60KΩ	600Ω	80±20%	180PF+5pF (ext.)	680uH	70	87	7	Yel
42IF102-RC	2nd	30KΩ	500Ω	80±20%	180PF+5pF (ext.)	680uH	98	57	7	White
42IF103-RC	3rd	20KΩ	6KΩ	75±20%	180PF+5pF (ext.)	680uH	103	50	27	Black
Center Frequency: 10.7MHz ±3%										
42IF122-RC	2nd & 3rd	15KΩ	300Ω	80 min.	47PF+5pF (ext.)	4.5uH	7	7	1	Brown
42IF123-RC	1st	25KΩ	4KΩ	95±20%	47PF+5pF (ext.)	4.5uH	5	9	2	Green
42IF129-RC	2nd & 3rd	15KΩ	100Ω	100±20%	30PF	7.4uH	12	6	1	Black

S0pecifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers / Signal Transformers](#) ***category:***

Click to view products by [Xicon](#) ***manufacturer:***

Other Similar products are found below :

[CU4S0506AT-2655-H1](#) [MGPWT-00449-P](#) [PE-64961](#) [1812WBT2-4](#) [1879479-1](#) [PA1528ANL](#) [T1137NLT](#) [PE-65848FNLT](#) [H5019EFNL](#)
[CX2045ALNLT](#) [TG1G-E201NV6LF](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#)
[TTC-5032-1](#) [4-1879391-0](#) [100213](#) [T1142NL](#) [1879732-1](#) [2-1879391-5](#) [TX1341NL](#) [H0013FNL](#) [H5020FNL](#) [3-1879385-4](#) [H2009FNLT](#)
[H5004NLT](#) [S553-5999-52-F](#) [SCMS7D43AY100PT1](#) [T5008NLT](#) [PE-68517T](#) [TG111-E212NWLFR](#) [MGPWT-00339-P](#) [H5014FNLT](#)
[TX1473NLT](#) [PE-69011NLT](#) [CX2043LNLT](#) [H7137FNLT](#) [H1259NLT](#) [TX1344NLT](#) [H0013NLT](#) [S558-5500-JV](#) [T7015NL](#) [T1124NLT](#)
[100B-4007](#) [TG1G-E005J24LF](#) [TD71-1205A](#) [TG10-1205NS](#)