



1 & 1.5W CONVECTION

The A Series is a broad line of ultra-miniature, DC to HV DC converters that set an industry standard in high voltage miniaturization. This unique package occupies less than one tenth of a cubic inch of volume, and an extremely low profile of only 0.250 inches (6.35mm).

Controllable output voltages range from 100 volts to 6000 volts. The output is directly proportional to the input voltage and is linear from <0.7V input to maximum input voltage, allowing for an adjustable output voltage. Output is load dependent. Isolation permits <±500V bias on output return. No external components or minimum load are required.

A separate high impedance control pin is standard and is designed for external error amplifier and/or DAC control in closed or open loop systems. Or simply connect the control pin to the + input for proportional input to output operation. These component-sized converters are ideal for applications requiring minimal size and weight.

Features

- Output voltages from 100V to 6000V
- Output Proportional to Input
- 0.7VDC Turn-on Voltage
- Extremely Low Profile < 0.25"
- Input to Output Isolation
- Short Circuit Protection
- Control Pin
- No minimum load
- 3 Year Warranty

DC-HVDC CONVERTER



Typical Applications









- Avalanche Photo Diodes
- Photo Multiplier Tubes
- Electrophoresis
- Capacitor Charging
- Sustaining Ion Pumps
- Piezo Devices
- Handheld Instruments

Dimensions

All models:

Height x Width: 0.25 x 0.45" (6.35 x 11.43mm)

100V to 2000V outputs:

6000V outputs:

Length: 0.92" (23.37mm)

Length: 1.33" (33.78mm)

3000V to 5000V outputs: Length: 1.13" (28.69mm)

Input

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|-----------------------|--------------|-----------------|-----------------|----------------|--|
| Input Voltage | 0.7 | | 5, 12, 24 | VDC | See Models & Ratings table |
| Input Current | | | 550 | mA | See Models & Ratings table |
| Control Voltage Input | Analog Contr | ol Voltage adju | sts output from | 0 to 100%, not | to exceed Input Voltage, see Application Notes on Page 8 for details |



Output

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions | | |
|--------------------------|--------------|---|--------------------------------|-------|----------------------------|--|--|
| Output Voltage | | | 6000 | VDC | See Models & Ratings table | | |
| Output Current | | | 15 | mA | See Models & Ratings table | | |
| Output Voltage Tolerance | | ±10 | | % | At Max Vout, Full Load | | |
| Minimum Load | No minimum | No minimum load required | | | | | |
| Regulation | Unregulated, | Unregulated, Output is proportional to Input. See Application Notes | | | | | |
| Short Circuit Protection | Protected ag | Protected against short circuit conditions for a minimum 1 minute. | | | | | |
| Ripple and Noise | | | 5 % See Models & Ratings table | | | | |

Environmental

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|------------------------------|--------------|---------|---------|-------|-------------------------------------|
| Operating Temperature (case) | -25 | | +75 | °C | Standing operating temp, all models |
| Operating Temperature (case) | -55 | | +85 | °C | Extended operating temp, -T models |
| Storage Temperature | -55 | | +105 | °C | |
| Cooling | Natural conv | ection | | | |
| Humidity | | | 95 | %RH | Non-condensing |

Safety Approvals

| Safety Agency | Standard | Notes & Conditions |
|---------------|-------------------------------------|--------------------|
| UL | IEC/UL/CSA/EN 62368 | |
| CE | Meets all applicable directives | |
| RoHS | RoHS 2 and 3 Directive (2011/65/EU) | Where applicable |


General

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|----------------------------|--------------|-----------------|-------------------|-------|--------------------------------|
| Isolation: Input to Output | | | 500 | V | <±500VDC Bias on Output Return |
| Leakage Current | | | 100 | mA | |
| Switching Frequency | 50 | | 350 | kHz | |
| Construction | Solid vacuum | n encapsulation | n, UL 94 V-0 rate | d | |
| Mean Time Between Failure | 1.862 | | | Mhrs | Per Bellcore TR 332 |

- 1. Maximum output current is available at maximum rated output voltage, and derates linearly as input voltage is decreased.
- 2. Output Voltage is load dependent. Under light or no-load conditions, reduce the Input Voltage so maximum rated Output Voltage is not exceeded.
- 3. Specifications are after 30 minute warm-up, full-load at 25°C , unless otherwise noted
- 4. Proper thermal management techniques are required to maintain safe case temperature at maximum power output.



Block Diagram

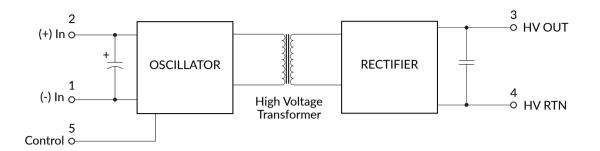

| Pin | Function |
|-----|-----------|
| 1 | (-) Input |
| 2 | (+) Input |
| 3 | HV Out |
| 4 | HV RTN |
| 5 | Control |

Models & Ratings

| Model Number | Output Voltage | Output Current | input Voltage | Input | Ripple | |
|----------------|----------------|----------------|---------------|---------|-----------|--------|
| iodei Nuiliber | Output voltage | Output Current | input voitage | No Load | Full Load | кірріе |
| A01 N-5 | 0 to -100V | 10mA | 5V | <300mA | <500mA | <5% |
| A01N-12 | 0 to -100V | 10mA | 12V | <100mA | <185mA | <5% |
| A01N-12T | 0 to -100V | 10mA | 12V | <100mA | <185mA | <5% |
| A01N-24T | 0 to -100V | 10mA | 24V | <25mA | <60mA | <5% |
| A01P-5T | 0 to +100V | 10mA | 5V | <300mA | <500mA | <5% |
| A01P-12 | 0 to +100V | 10mA | 12V | <100mA | <185mA | <5% |
| A01P-12T | 0 to +100V | 10mA | 12V | <100mA | <185mA | <5% |
| A01P-24T | 0 to +100V | 10mA | 24V | <25mA | <60mA | <5% |
| A02N-5 | 0 to -200V | 5mA | 5V | <300mA | <500mA | <1% |
| A02N-5T | 0 to -200V | 5mA | 5V | <300mA | <500mA | <1% |
| A02N-12 | 0 to -200V | 5mA | 12V | <100mA | <185mA | <1% |
| A02N-12T | 0 to -200V | 5mA | 12V | <100mA | <185mA | <1% |
| A02N-24 | 0 to -200V | 5mA | 24V | <25mA | <60mA | <1% |
| A02N-24T | 0 to -200V | 5mA | 24V | <25mA | <60mA | <1% |
| A02P-5 | 0 to +200V | 5mA | 5V | <300mA | <500mA | <1% |
| A02P-5T | 0 to +200V | 5mA | 5V | <300mA | <500mA | <1% |
| A02P-12 | 0 to +200V | 5mA | 12V | <100mA | <185mA | <1% |
| A02P-12T | 0 to +200V | 5mA | 12V | <100mA | <185mA | <1% |
| A02P-24 | 0 to +200V | 5mA | 24V | <25mA | <60mA | <1% |
| A02P-24T | 0 to +200V | 5mA | 24V | <25mA | <60mA | <1% |
| A025P-5 | 0 to +250V | 4mA | 5V | <300mA | <500mA | <0.9% |
| A03N-12 | 0 to -300V | 3.33mA | 12V | <100mA | <185mA | <0.7% |
| A03P-12 | 0 to +300V | 3.33mA | 12V | <100mA | <185mA | <0.7% |
| A03P-12T | 0 to +300V | 3.33mA | 12V | <100mA | <185mA | <0.7% |
| A04N-12T | 0 to -400V | 2.5mA | 12V | <100mA | <185mA | <0.5% |
| A04P-5 | 0 to +400V | 2.5mA | 5V | <300mA | <500mA | <0.5% |
| A04P-12T | 0 to +400V | 2.5mA | 12V | <100mA | <185mA | <0.5% |
| A05N-12 | 0 to -500V | 2mA | 12V | <100mA | <185mA | <0.5% |
| A05P-5 | 0 to +500V | 2mA | 5V | <300mA | <500mA | <0.5% |
| A05P-5T | 0 to +500V | 2mA | 5V | <300mA | <500mA | <0.5% |
| A05P-12 | 0 to +500V | 2mA | 12V | <100mA | <185mA | <0.5% |
| A05P-12T | 0 to +500V | 2mA | 12V | <100mA | <185mA | <0.5% |
| A06N-5 | 0 to -600V | 1.67mA | 5V | <300mA | <500mA | <1% |
| A06N-12 | 0 to -600V | 1.67mA | 12V | <100mA | <185mA | <1% |

Models & Ratings

| odel Number | Output Voltage | Output Current | input Voltage | Input (| Ripple | |
|-------------|-----------------|-----------------|------------------------|-----------------|------------------|-------|
| | o aspar voltago | - aspar ourione | par roitage | No Load | Full Load | |
| A06P-5 | 0 to +600V | 1.67mA | 5V | <300mA | <500mA | <1% |
| A06P-5T | 0 to +600V | 1.67mA | 5V | <300mA | <500mA | <1% |
| A07N-24 | 0 to -700V | 1.43mA | 24V | <25mA | <60mA | <1% |
| A08N-24 | 0 to -800V | 1.25mA | 24V | <25mA | <60mA | <1% |
| A08P-5 | 0 to +800V | 1.25mA | 5V | <300mA | <500mA | <1% |
| A08P-12 | 0 to +800V | 1.25mA | 12V | <100mA | <185mA | <1% |
| A10N-12 | 0 to -1000V | 1mA | 12V | <100mA | <185mA | <0.8% |
| A10P-5 | 0 to +1000V | 1mA | 5V | <300mA | <500mA | <0.8% |
| A10P-5T | 0 to +1000V | 1mA | 5V | <300mA | <500mA | <0.8% |
| A10P-12 | 0 to +1000V | 1mA | 12V | <100mA | <185mA | <0.8% |
| A12N-5 | 0 to -1200V | 0.83mA | 5V | <300mA | <500mA | <0.5% |
| A12N-12 | 0 to -1200V | 0.83mA | 12V | <100mA | <185mA | <0.5% |
| A12N-24 | 0 to -1200V | 0.83mA | 24V | <25mA | <60mA | <0.5% |
| A12P-12 | 0 to +1200V | 0.83mA | 12V | <100mA | <185mA | <0.5% |
| A12P-5 | 0 to +1200V | 0.83mA | 5V | <300mA | <500mA | <0.5% |
| A15N-12 | 0 to -1500V | 0.66mA | 12V | <100mA | <185mA | <0.4% |
| A15N-24T | 0 to -1500V | 0.66mA | 24V | <25mA | <60mA | <0.4% |
| A15N-5 | 0 to -1500V | 0.66mA | 5V | <300mA | <500mA | <0.4% |
| A15P-5 | 0 to +1500V | 0.66mA | 5V | <300mA | <500mA | <0.4% |
| A15P-12 | 0 to +1500V | 0.66mA | 12V | <100mA | <185mA | <0.4% |
| A15P-24 | 0 to +1500V | 0.66mA | 24V | <25mA | <60mA | <0.4% |
| A15P-24T | 0 to +1500V | 0.66mA | 24V | <25mA | <60mA | <0.4% |
| A20N-5 | 0 to -2000V | 0.5mA | 5V | <300mA | <500mA | <0.3% |
| A20N-12T | 0 to -2000V | 0.5mA | 12V | <100mA | <185mA | <0.3% |
| A20P-5 | 0 to +2000V | 0.5mA | 5V | <300mA | <500mA | <0.3% |
| A20P-12 | 0 to +2000V | 0.5mA | 12V | <100mA | <185mA | <0.3% |
| A20P-12T | 0 to +2000V | 0.5mA | 12V | <100mA | <185mA | <0.3% |
| A30N-5 | 0 to -3000V | 0.33mA | 5V | <300mA | <500mA | <0.3% |
| A30N-5T | 0 to -3000V | 0.33mA | 5V | <300mA | <500mA | <0.3% |
| A30N-12 | 0 to -3000V | 0.33mA | 12V | <100mA | <185mA | <0.3% |
| A30N-24 | 0 to -3000V | 0.33mA | 24V | <25mA | <60mA | <0.3% |
| A30P-5 | 0 to +3000V | 0.33mA | 5V | <300mA | <500mA | <0.3% |
| A30P-5T | 0 to +3000V | 0.33mA | 5V | <300mA | <500mA | <0.3% |
| A30P-12 | 0 to +3000V | 0.33mA | 12V | <100mA | <185mA | <0.3% |
| A30P-24 | 0 to +3000V | 0.33mA | 24V | <100HA <25mA | < 60mA | <0.3% |
| | | | 5V | | | |
| A40N-5 | 0 to -4000V | 0.25mA | | <300mA | <500mA | <0.3% |
| A40N-5T | 0 to -4000V | 0.25mA | 5V | <300mA | <500mA | <0.3% |
| A40P-5 | 0 to +4000V | 0.25mA | 5V | <300mA | <500mA <500mA | <0.3% |
| A40P-5T | 0 to +4000V | 0.25mA | 5V | <300mA | | <0.3% |
| A50N-5 | 0 to -5000V | 0.20mA | 5V | <300mA | <500mA | <0.3% |
| A50N-5T | 0 to -5000V | 0.20mA | 5V | <300mA | <500mA | <0.3% |
| A50P-5 | 0 to +5000V | 0.20mA | 5V | <300mA | <500mA | <0.3% |
| A50P-5T | 0 to +5000V | 0.20mA | 5V | <300mA | <500mA | <0.3% |
| A60N-5 | 0 to -6000V | 0.16mA | 5V | <300mA | <500mA | <0.3% |
| A60P-5 | 0 to +6000V | 0.16mA | 5V | <300mA | <500mA | <0.3% |
| A60P-5T | 0 to +6000V | 0.16mA | 5V AH Models - 1.5W | <300mA | <500mA | <0.3% |
| AH01N-12 | 0 to -100V | 15mA | 12V | <125mA | <250mA | <2% |
| AH01N-24 | 0 to -100V | 15mA | 24V | <40mA | <120mA | <2% |
| AH01P-12 | 0 to +100V | 15mA | 12V | <125mA | <250mA | <2% |
| AH02N-5 | 0 to -200V | 7.5mA | 5V | <300mA | <550mA | <3% |
| AH02N-12 | 0 to -200V | 7.5mA | 12V | <125mA | <250mA | <3% |



Models & Ratings

| la dal Niverban | 0 | 0.1.10 | input Voltage | Input (| Current | Ripple |
|-----------------|----------------|----------------|---------------|---------|-----------|--------|
| Model Number | Output Voltage | Output Current | | No Load | Full Load | |
| AH02P-5 | 0 to +200V | 7.5mA | 5V | <300mA | <550mA | <3% |
| AH02P-24 | 0 to +200V | 7.5mA | 24V | <40mA | <120mA | <3% |
| AH025P-5 | 0 to +250V | 6mA | 5V | <300mA | <550mA | <1.2% |
| AH025P-12 | 0 to +250V | 6mA | 12V | <125mA | <250mA | <1.2% |
| AH03N-12 | 0 to -300V | 5mA | 12V | <125mA | <250mA | <0.7% |
| AH03P-5 | 0 to +300V | 5mA | 5V | <300mA | <550mA | <0.7% |
| AH03P-24 | 0 to +300V | 5mA | 24V | <40mA | <120mA | <0.7% |
| AH04N-12 | 0 to -400V | 3.75mA | 12V | <125mA | <250mA | <0.8% |
| AH04P-12 | 0 to +400V | 3.75mA | 12V | <125mA | <250mA | <0.8% |
| AH05N-5 | 0 to -500V | 3mA | 5V | <300mA | <550mA | <0.7% |
| AH05N-12 | 0 to -500V | 3mA | 12V | <125mA | <250mA | <0.75% |
| AH05P-5 | 0 to +500V | 3mA | 5V | <300mA | <550mA | <0.7% |
| AH05P-12 | 0 to +500V | 3mA | 12V | <125mA | <250mA | <0.7% |
| AH06N-5 | 0 to -600V | 2.5mA | 5V | <300mA | <550mA | <2% |
| AH06P-5 | 0 to +600V | 2.5mA | 5V | <300mA | <550mA | <2% |
| AH08P-5 | 0 to +800V | 1.87mA | 5V | <300mA | <550mA | <1.2% |
| AH09N-5 | 0 to -900V | 1.67mA | 5V | <300mA | <550mA | <1.2% |
| AH09P-24 | 0 to +900V | 1.67mA | 24V | <40mA | <120mA | <1.2% |
| AH10N-12 | 0 to -1000V | 1.5mA | 12V | <125mA | <250mA | <1% |
| AH10P-12 | 0 to +1000V | 1.5mA | 12V | <125mA | <250mA | <1% |
| AH12N-5 | 0 to -1200V | 1.25mA | 5V | <300mA | <550mA | <0.6% |
| AH12P-24 | 0 to +1200V | 1.25mA | 24V | <40mA | <120mA | <0.6% |
| AH15P-5 | 0 to +1500V | 1mA | 5V | <300mA | <550mA | <0.6% |
| AH15P-24 | 0 to +1500V | 1mA | 24V | <40mA | <120mA | <0.6% |
| AH20N-12 | 0 to -2000V | 0.75mA | 12V | <125mA | <250mA | <0.5% |
| AH20P-5 | 0 to +2000V | 0.75mA | 5V | <300mA | <550mA | <0.5% |
| AH20P-12 | 0 to +2000V | 0.75mA | 12V | <125mA | <250mA | <0.5% |
| AH30N-5 | 0 to -3000V | 0.5mA | 5V | <300mA | <550mA | <0.3% |
| AH30N-24 | 0 to -3000V | 0.5mA | 24V | <40mA | <120mA | <0.3% |
| AH30P-5 | 0 to +3000V | 0.5mA | 5V | <300mA | <550mA | <0.3% |
| AH30P-12 | 0 to +3000V | 0.5mA | 12V | <125mA | <250mA | <0.3% |
| AH60N-5 | 0 to -6000V | 0.25mA | 5V | <300mA | <550mA | <0.3% |
| AH60P-5 | 0 to +6000V | 0.25mA | 5V | <300mA | <550mA | <0.3% |


⁻T represents extended temperature model




Mechanical Details

100V - 2000V


Top View

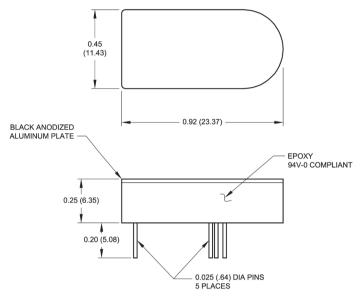

Bottom View

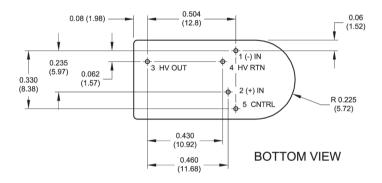

Recommended Layout

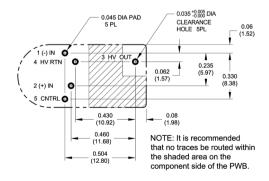

- 1. All dimensions are in inches (mm)
- 2. Weight < 0.2oz (5.66g)

- 3. Tolerance: X.XX±0.02 (0.51)
- 4. Pin Tolerance: ±0.005 (0.127)







Mechanical Details

3000V - 5000V


Top View

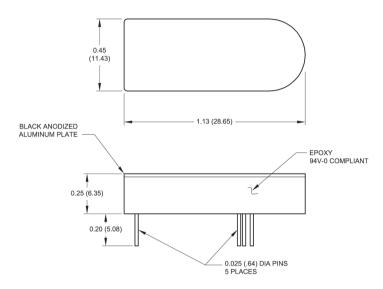

Bottom View

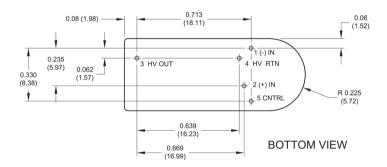

Recommended Layout

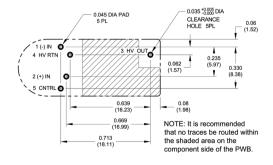

Notes:

- 1. All dimensions are in inches (mm)
- 2. Weight 0.25oz (7.09g)

- 3. Tolerance: X.XX±0.02 (0.51)
- 4. Pin Tolerance: ±0.005 (0.127)


7




Mechanical Details

6000V


Top View

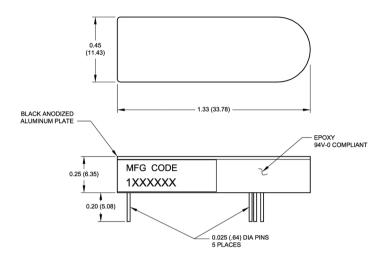

Bottom View

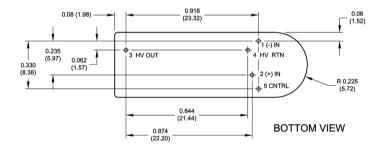

Recommended Layout



RECOMMENDED LAYOUT

- 1. All dimensions are in inches (mm)
- 2. Weight <0.3oz (8.49g)


- 3. Tolerance: X.XX±0.02 (0.51)
- 4. Pin Tolerance: ±0.005 (0.127)




Application Notes

Typical HV Output vs. Control Voltage

For proportional operation, tie the control pin to the input voltage, or use separately for control as shown below. Do not leave floating.

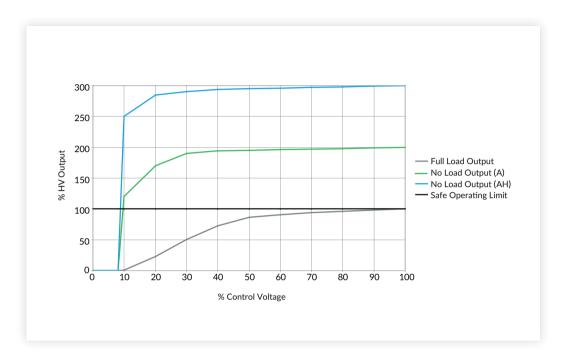

Typical Output vs. Input Voltage

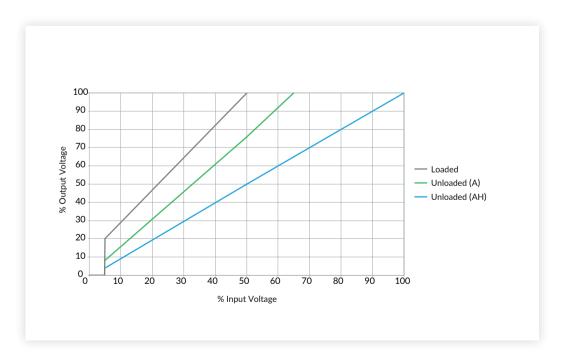

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Isolated DC/DC Converters category:

Click to view products by XP Power manufacturer:

Other Similar products are found below:

ESM6D044440C05AAQ FMD15.24G PSL486-7LR Q48T30020-NBB0 JAHW100Y1 SPB05C-12 SQ24S15033-PS0S 18952 19-130041
CE-1003 CE-1004 GQ2541-7R RDS180245 MAU228 J80-0041NL DFC15U48D15 XGS-0512 XGS-1205 XGS-1212 XGS-2412 XGS2415 XKS-1215 06322 NCT1000N040R050B SPB05B-15 SPB05C-15 L-DA20 DCG40-5G QME48T40033-PGB0 XKS-2415 XKS-2412
XKS-1212 XKS-1205 XKS-0515 XKS-0505 XGS-2405 XGS-1215 XGS-0515 PS9Z-6RM4 73-551-5038I AK1601-9RT VI-N61-CM VIR5022-EXWW PSC128-7iR RPS8-350ATX-XE DAS1004812 PQA30-D24-S24-DH VI-M5F-CQ VI-LN2-EW VI-PJW01-CZY