

NPN High Voltage Amplifier

MMBTA42G

FEATURES


- Epitaxial planar die construction.
- Complementary PNP type available (MMBTA92).
- Ideal for medium power amplification and switching.
- Non-Halogen



APPLICATIONS

- NPN High voltage amplifier.

HF

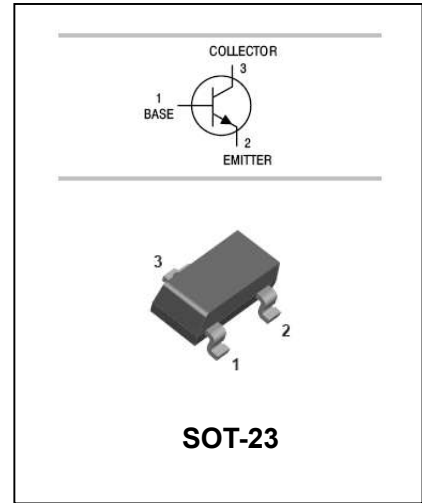

ORDERING INFORMATION

Type No.	Marking	Package Code
MMBTA42G	1D	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	UNIT
V_{CBO}	Collector-base voltage	300	V
V_{CEO}	Collector-emitter voltage	300	V
V_{EBO}	Emitter-base voltage	6	V
I_C	Collector current (DC)	0.5	A
P_D	Total device dissipation	0.3	W
$R_{\theta JA}$	Thermal resistance, junction to ambient	417	°C/W
T_J, T_{stg}	Junction and storage temperature	-55 to +150	°C



NPN High Voltage Amplifier

MMBTA42G

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified





Symbol	Parameter	Test conditions	MIN.	MAX.	UNIT
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=100\mu A, I_E=0$	300	-	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=1.0mA, I_B=0$	300	-	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=100\mu A, I_C=0$	6	-	V
I_{CBO}	collector cut-off current	$I_E = 0; V_{CB} = 200V$	-	0.1	μA
I_{EBO}	emitter cut-off current	$I_C = 0; V_{EB} = 6V$	-	0.1	μA
h_{FE}	DC current gain	$V_{CE} = 10V; I_C=1mA$ $V_{CE} = 10V; I_C = 10mA$ $V_{CE} = 10V; I_C = 30mA$	25 40 40	- - -	
$V_{CE(sat)}$	collector-emitter saturation voltage	$I_C = 20mA; I_B = 2mA$	-	0.5	V
$V_{BE(sat)}$	base-emitter saturation voltage	$I_C = 20mA; I_B = 2mA$	-	0.9	V
C_{ob}	Collector output capacitance	$V_{CB}=20V, I_E=0; f=1.0MHz$		3.0	pF
f_T	transition frequency	$I_C=10mA; V_{CE} = 20V$ $f=100MHz$	50	-	MHz

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

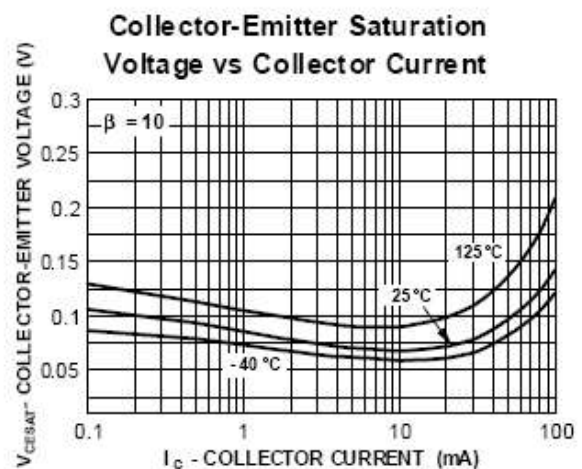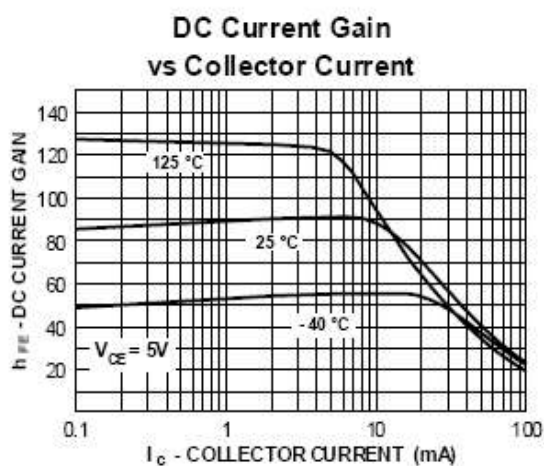

NPN High Voltage Amplifier

MMBTA42G

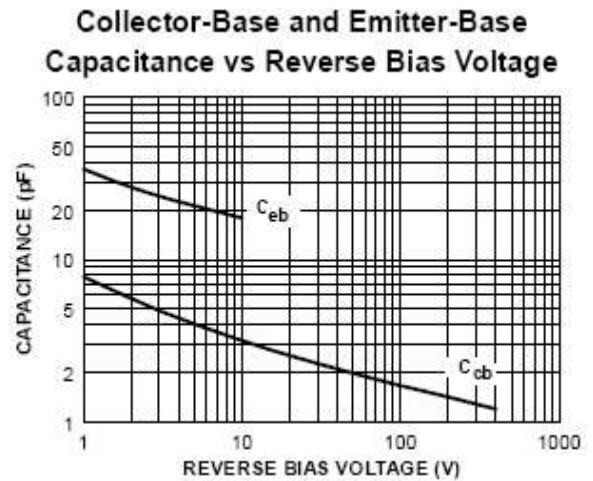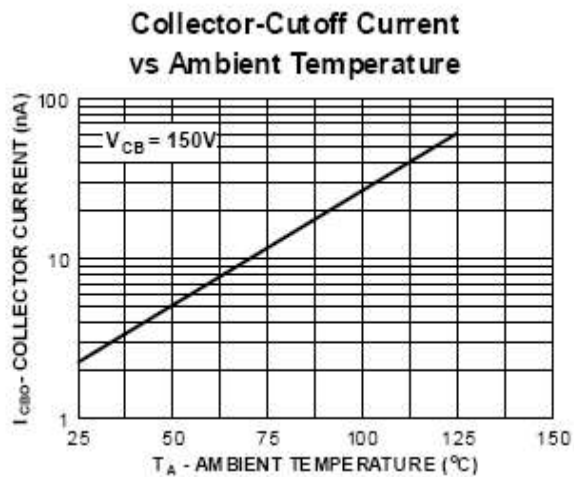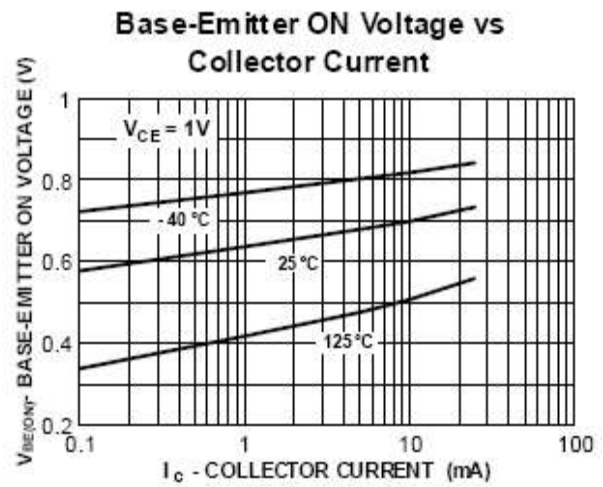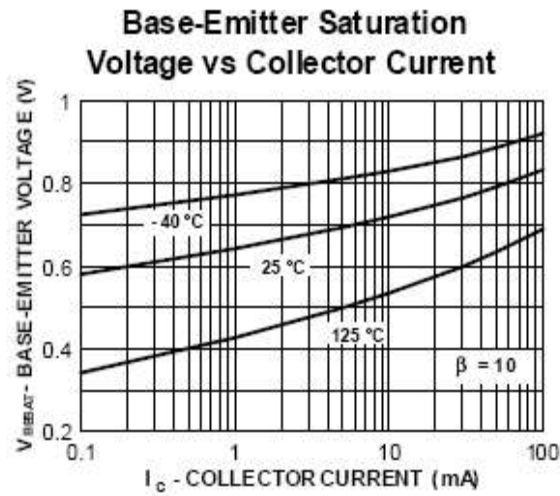


NPN High Voltage Amplifier

MMBTA42G


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

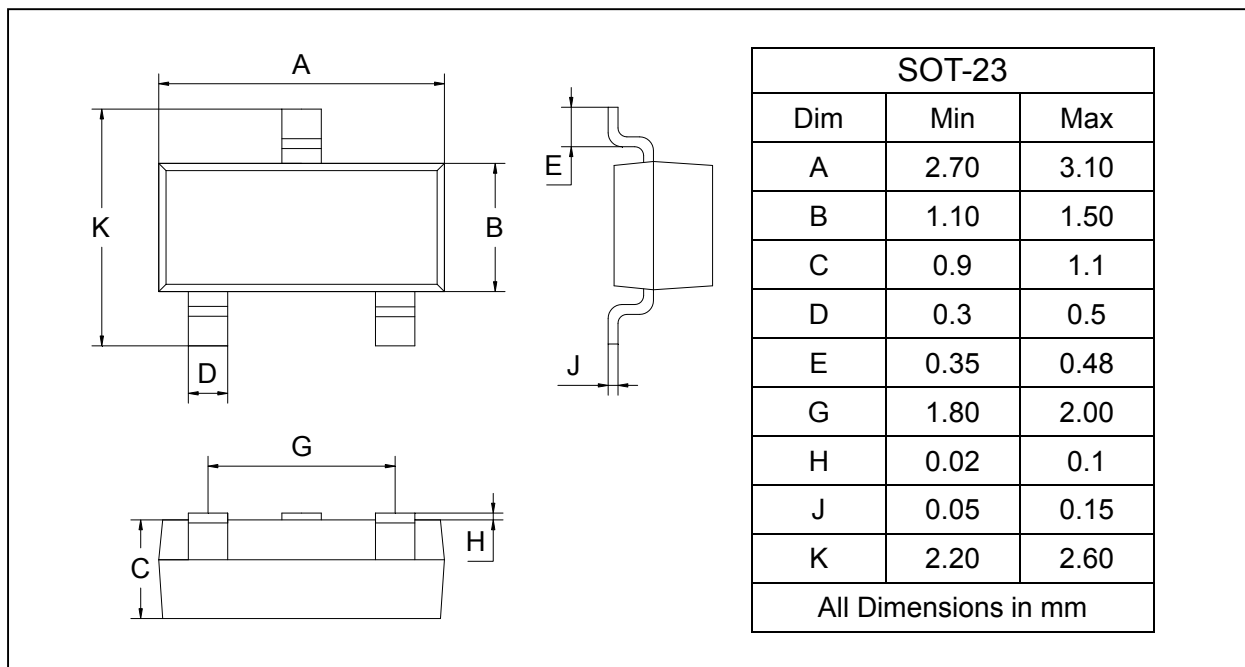

SOLDERING FOOTPRINT

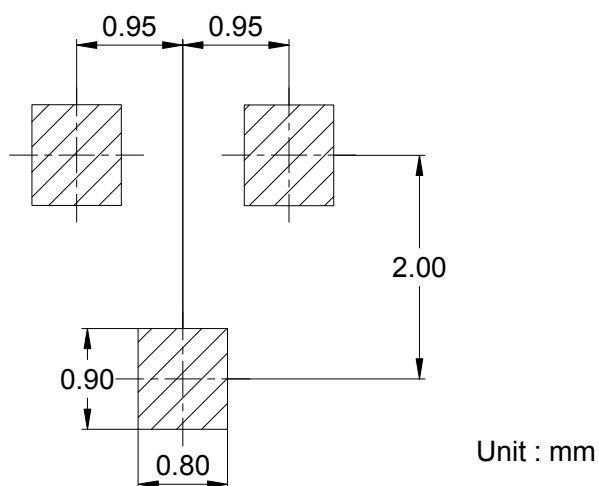

PACKAGE INFORMATION

Device	Package	Shipping
MMBTA42G	SOT-23	3000/Tape&Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT](#) ***category:***

Click to view products by [Galaxy](#) ***manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)