


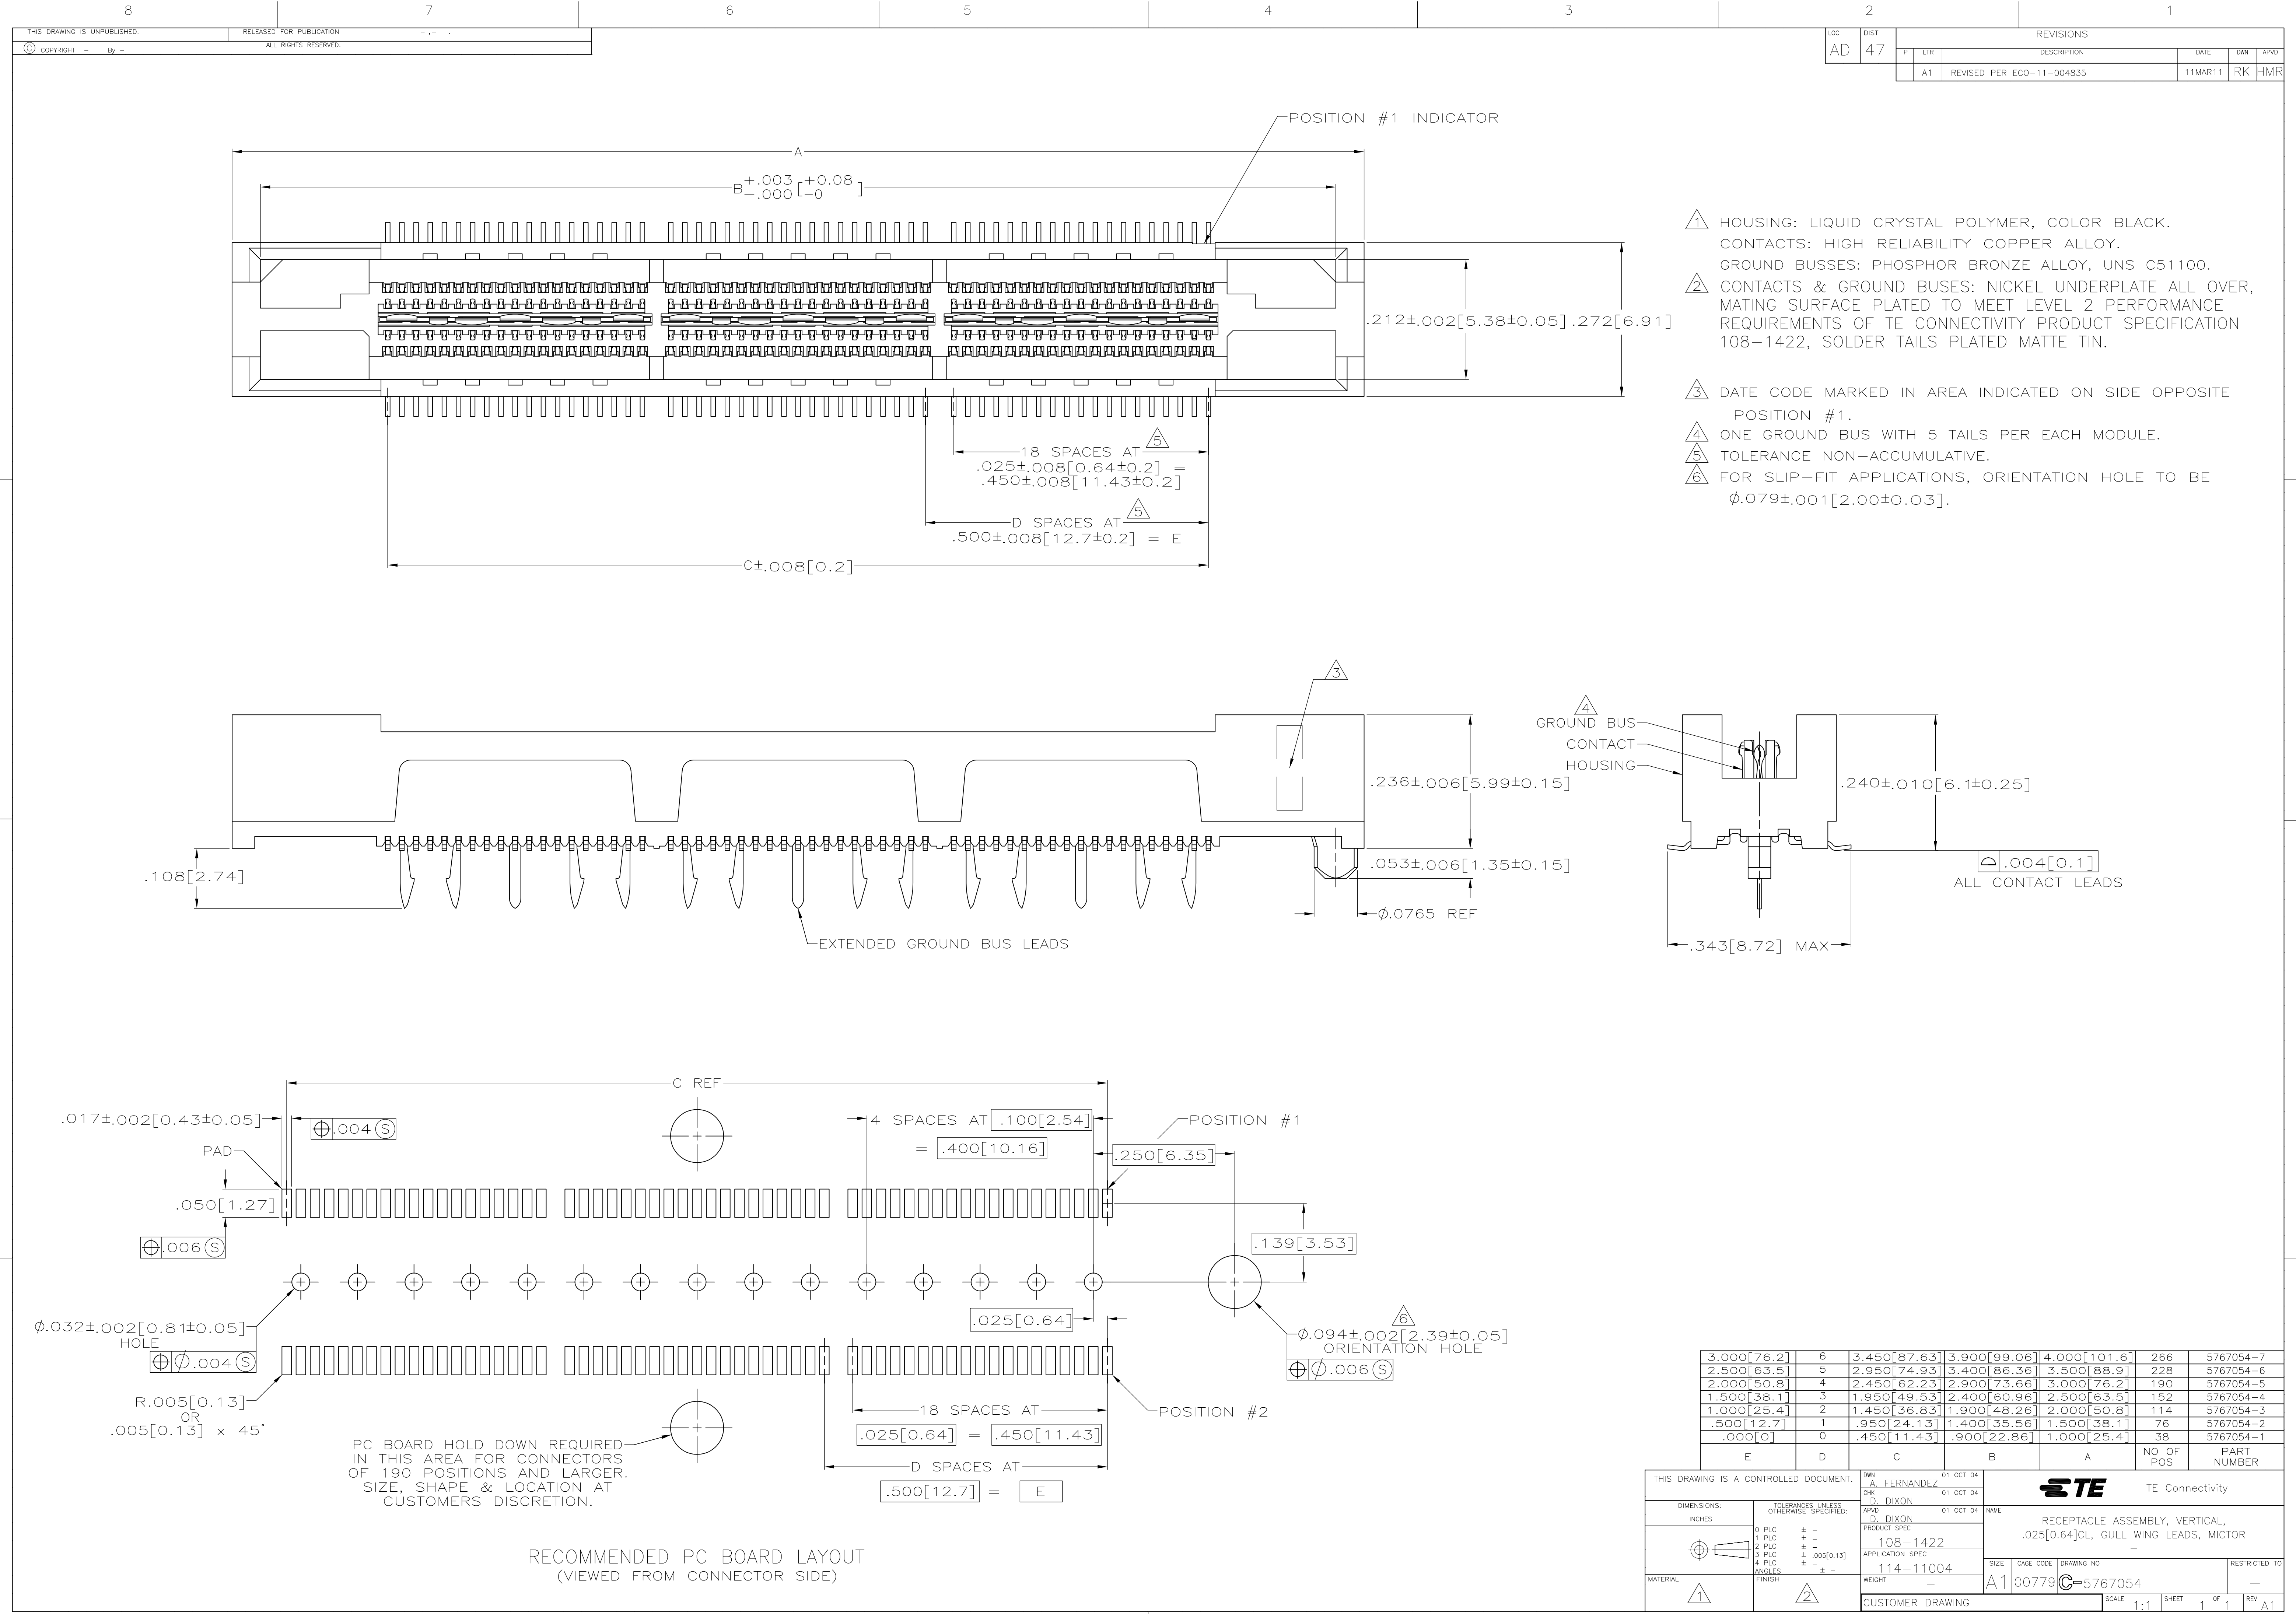

- 1 HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.  
CONTACTS: HIGH RELIABILITY COPPER ALLOY.  
GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- 2 CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED MATTE TIN.
- 3 DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- 4 ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- 5 TOLERANCE NON-ACCUMULATIVE.
- 6 FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE  $\phi .079 \pm 0.001 [2.00 \pm 0.03]$ .

|             |   |              |              |              |           |             |
|-------------|---|--------------|--------------|--------------|-----------|-------------|
| 3.000[76.2] | 6 | 3.450[87.63] | 3.900[99.06] | 4.000[101.6] | 266       | 5767054-7   |
| 2.500[63.5] | 5 | 2.950[74.93] | 3.400[86.36] | 3.500[88.9]  | 228       | 5767054-6   |
| 2.000[50.8] | 4 | 2.450[62.23] | 2.900[73.66] | 3.000[76.2]  | 190       | 5767054-5   |
| 1.500[38.1] | 3 | 1.950[49.53] | 2.400[60.96] | 2.500[63.5]  | 152       | 5767054-4   |
| 1.000[25.4] | 2 | 1.450[36.83] | 1.900[48.26] | 2.000[50.8]  | 114       | 5767054-3   |
| .500[12.7]  | 1 | .950[24.13]  | 1.400[35.56] | 1.500[38.1]  | 76        | 5767054-2   |
| .000[0]     | 0 | .450[11.43]  | .900[22.86]  | 1.000[25.4]  | 38        | 5767054-1   |
| E           | D | C            | B            | A            | NO OF POS | PART NUMBER |

|                                        |  |                                                                                                                                |                                     |                                                                                 |  |
|----------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN<br>A. FERNANDEZ<br>CHK<br>D. DIXON<br>APVD<br>D. DIXON                                                                     | 01 OCT 04<br>01 OCT 04<br>01 OCT 04 | TE Connectivity                                                                 |  |
| DIMENSIONS:<br>INCHES                  |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ± -<br>1 PLC ± -<br>2 PLC ± -<br>3 PLC ± .005(0.13)<br>4 PLC ± -<br>ANGLES ± - |                                     | NAME<br>RECEPTACLE ASSEMBLY, VERTICAL,<br>.025[0.64]CL, GULL WING LEADS, MICTOR |  |
|                                        |  | PRODUCT SPEC<br>108-1422                                                                                                       |                                     | SIZE<br>A1                                                                      |  |
| MATERIAL<br>1                          |  | APPLICATION SPEC<br>114-11004                                                                                                  |                                     | CAGE CODE<br>00779                                                              |  |
| FINISH<br>2                            |  | WEIGHT<br>-                                                                                                                    |                                     | DRAWING NO<br>5767054                                                           |  |
| CUSTOMER DRAWING                       |  |                                                                                                                                |                                     | SCALE 1:1 SHEET 1 OF 1 REV A1                                                   |  |