


# MIL-DTL-38999 Series I Type Connectors

## with PCB contacts

### LJTPQ00R wall mounting receptacle

(back panel mounting)

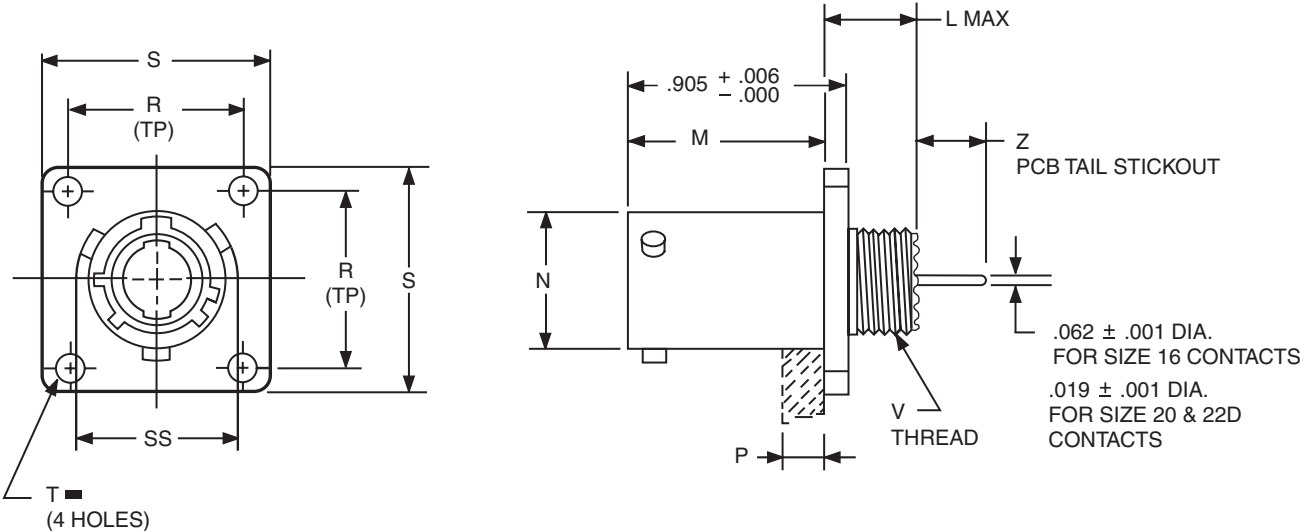

#### HOW TO ORDER

- Order by applicable 88/91 part number in table below.  
88 prefix designates olive drab cadmium plated connector shell.  
91 prefix designates electroless nickel plated connector shell.
- Add insert arrangement to end of number. Refer to insert availability chart on page 4 and pin-out illustrations on pages 5-24. Last letter of part number designates rotation; P for pins in normal position, S for sockets in normal position. See page 25 for alternate rotation letter to use.  
Example part number: 88-569701-35P designates shell size 9 with a 9-35 insert and pin contacts in normal position.
- Z dimension is determined by contact type in the insert arrangement.
- Most common options are shown; other options are available.

■ (⊕) .005 DIA (M)

| Shell Size | Part Number      | L Max. | M<br>+.000<br>-.005 | N Dia. | P Max. Panel Thickness | R (TP) | S<br>+.011<br>-.010 | T Dia.<br>±.005 | V Thread Class 2A (Plated) | SS Dia.<br>+.000<br>-.016 | Z                     |                   |
|------------|------------------|--------|---------------------|--------|------------------------|--------|---------------------|-----------------|----------------------------|---------------------------|-----------------------|-------------------|
|            |                  |        |                     |        |                        |        |                     |                 |                            |                           | Size 16 & 20 Contacts | Size 22D Contacts |
| 9          | 88/91-569701-XXX | .453   | .820                | .572   | .234                   | .719   | .938                | .128            | .4375-28 UNEF              | .662                      | .281 – .235           | .249 – .188       |
| 11         | 702-XXX          | .453   | .820                | .700   | .234                   | .812   | 1.031               | .128            | .5625-24 UNEF              | .810                      | .281 – .235           | .249 – .188       |
| 13         | 703-XXX          | .453   | .820                | .850   | .234                   | .906   | 1.125               | .128            | .6875-24 UNEF              | .960                      | .281 – .235           | .249 – .188       |
| 15         | 704-XXX          | .453   | .820                | .975   | .234                   | .969   | 1.219               | .128            | .8125-20 UNEF              | 1.085                     | .281 – .235           | .249 – .188       |
| 17         | 705-XXX          | .453   | .820                | 1.100  | .234                   | 1.062  | 1.312               | .128            | .9375-20 UNEF              | 1.210                     | .281 – .235           | .249 – .188       |
| 19         | 706-XXX          | .453   | .820                | 1.207  | .234                   | 1.156  | 1.438               | .128            | 1.0625-18 UNEF             | 1.317                     | .281 – .235           | .249 – .188       |
| 21         | 707-XXX          | .484   | .790                | 1.332  | .204                   | 1.250  | 1.562               | .128            | 1.1875-18 UNEF             | 1.442                     | .281 – .235           | .249 – .188       |
| 23         | 708-XXX          | .484   | .790                | 1.457  | .204                   | 1.375  | 1.688               | .147            | 1.3125-18 UNEF             | 1.567                     | .281 – .235           | .249 – .188       |
| 25         | 709-XXX          | .484   | .790                | 1.582  | .193                   | 1.500  | 1.812               | .147            | 1.4375-18 UNEF             | 1.692                     | .281 – .235           | .249 – .188       |

All dimensions for reference only.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Circular MIL Spec Connector](#) category:***

***Click to view products by [Amphenol](#) manufacturer:***

Other Similar products are found below :

[89075GULPR](#) [0025-264-3014](#) [58-570121-04S](#) [58-584653-12P](#) [0134-213-1007](#) [0134-213-1208](#) [0134-213-2209](#) [0025-258-000](#) [60-042022-02P](#) [60-042022-19P](#) [60-042022-23P](#) [60-042217-10P](#) [60-042217-11P](#) [012-0467-000](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-207-2009](#) [0134-213-1006](#) [6104-207-2302](#) [6104-208-1902](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-207-13149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-211-19149P](#) [6131-216-19149P](#) [6131-220-25149P](#) [6131-259-11149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-263-19149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [6134-203-21149](#) [CS3100A18-1P-472](#) [CS3100A-36-77S](#) [CS3101A36-79S-SR](#) [CS3102A-10SL-53P](#) [CS3102A10SL-64S](#) [CS3102A-18-1P116](#) [CS3102A-20-15S](#) [CS3102A-22-70S](#) [CS3102A-24-79S](#) [CS3102A24-AJS](#) [CS3102A-32-17P](#) [CS3102A32-25S](#) [CS3102A-36-78S](#) [CS3106A10SL3S004](#)