


CONDUCTIVE BLACK POLYURETHANE FOAM

26-1xx-xxxx

Features and Advantages

- General shock absorption
- Increase shielding properties of the packaging
- Should not be used when foam is in direct contact with some ESD sensitive devices

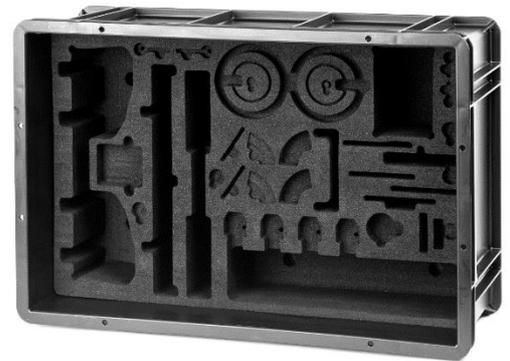

Product specification

Material:	PU foam with conductive latex impregnation
Color:	Black
Cells:	Open cells, flexible
Density:	24 kg/m ³
Usage temperature:	N.D.
Tensile strength:	70 kPa
Loose after heating process:	-30% (140°C, 16 hrs)
Loose after humidity process:	-30% (105°C, 3hrs)
Elongation at break:	100%
Resistance to compression:	@ 50%: 3 kPa
Hardness:	120-140 N (BS4443 part 2 method 7 1988)
Class:	A (BS3379 1991)

Electrical properties

Surface resistance:	< 10 ⁵ Ω (IEC 61340-3-2)
Volume resistance:	< 10 ⁵ Ω
Decay time:	From 1000V to 100V: < 2 seconds

Compliance to standards

IEC 61340-5-1, RoHS directive (2002/95/CE)

+ - + - + - + -

+

SOLUTION GLOBALE
DE PROTECTION AUX ESD

-EUROSTAT-
A MEMBER OF DOU YEE

Part Numbers

Description	Part Number	Size (mm)
Customized settings	26-10x-xxxx	
Standard sheets	83-10x-xxxx	2000 x 1000
Foam for 400x300mm	26-103-0019	355 x 255 x 3
Foam for 600x400mm	26-103-0020	555 x 355 x 3
Foam for 400x300mm	26-106-0016	355 x 255 x 6
Foam for 600x400mm	26-106-0013	555 x 355 x 6

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antistatic Control Products](#) category:

Click to view products by [Eurostat](#) manufacturer:

Other Similar products are found below :

[14404](#) [2202SP](#) [37061](#) [42470](#) [09813](#) [04563](#) [09826](#) [09813](#) [68101](#) [68103](#) [73741](#) [13457](#) [13245](#) [13420](#) [91070](#) [13080](#) [010-0030](#) [010-0115](#)
[013-0010](#) [09204](#) [ZJ-SD100](#) [1900-8X12](#) [1910-10X12](#) [82A3](#) [1900-6X8](#) [1900-7-15](#) [20-082-0003](#) [STW404111](#) [20-871-1014](#) [20-871-1418](#) [20-](#)
[871-1624](#) [20-871-1818](#) [20-872-1418](#) [52889](#) [52867](#) [52849](#) [52870](#) [52843](#) [52845](#) [52873](#) [52877](#) [53744](#) [53763](#) [52795](#) [52980](#) [52785](#) [52787](#)
[53769](#) [53767](#) [53771](#)