





(1,00 mm) .0394"



FTMH-116-02-L-DV-P



SMT MICRO TERMINAL STRIPS

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?FTMH or www.samtec.com?FTM

Insulator Material: Black Liquid Crystal Polymer
Terminal Material: Phosphor Bronze
Current Rating (FTMH/CLM): 2.8 A per pin (1 pin powered per row)
Operating Temp Range: -55°C to +125°C
Plating: Sn or Au over 50µ" (1.27 µm) Ni
RoHS Compliant: Yes

Processing: Lead-Free Solderable: Yes
-DV Lead Coplanarity: (0,10 mm) .004" max
-DH Lead Coplanarity: (0,10 mm) .004" max (05-25) (0,15 mm) .006" max (26-50)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




ALSO AVAILABLE (MOQ Required)


- End shrouds with board locks
 - Molded end shrouds for 05 through 08 positions
 - Other platings
- Contact Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable.

Mates with: CLM, MLE

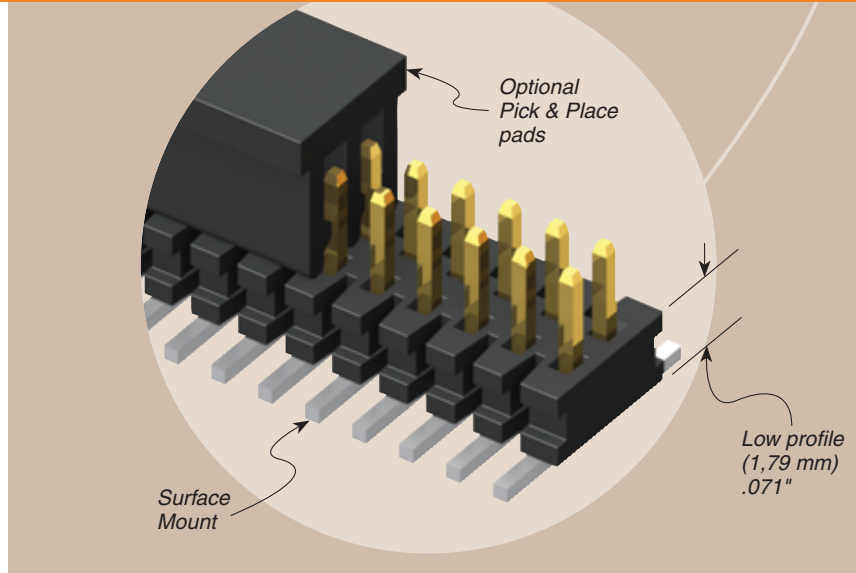


TYPE STRIP	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION
FTMH = SMT Micro		FTMH = 05 thru 50	-02 = (1,91 mm) .075" Post (Mates with MLE)	-F = Gold flash on post, Matte Tin on tail
FTM = Micro Low Profile		FTM = 02 thru 50 (unshrouded) = 05 thru 46 (shrouded)	-03 = (1,65 mm) .065" Post (Mates with CLM)	-L = 10µ" (0,25 µm) Gold on post, Matte Tin on tail

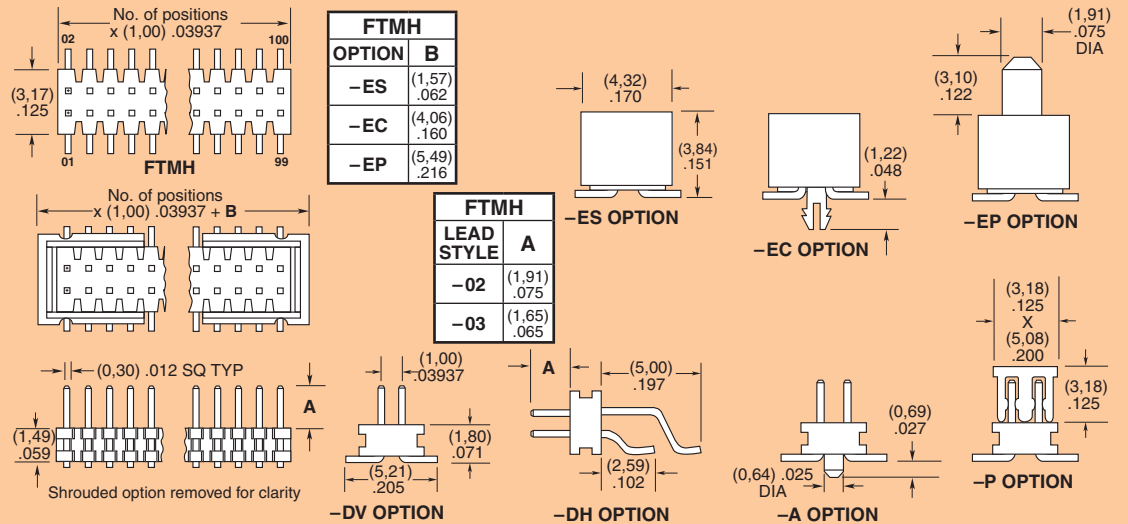


Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM


FTMH-122-02-F-DV-EC




FTMH-135-02-F-DH




FTMH-120-02-L-DV





FTMH-125-02-L-DV



FTMH-128-03-L-DV-EP




FTMH, FTM SERIES

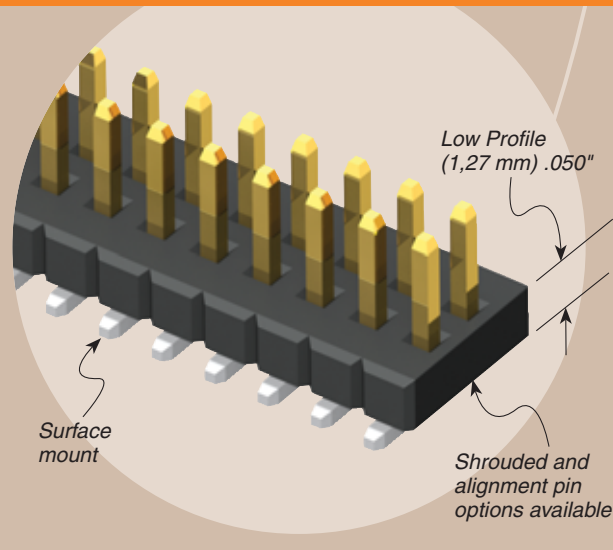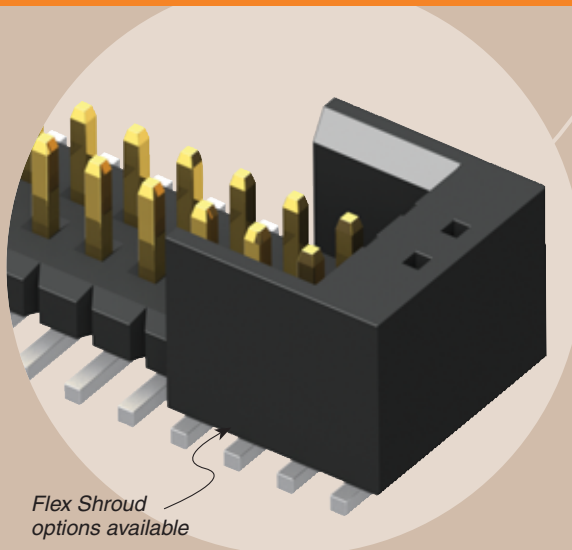

ROW OPTION

- DV = Dual Vertical
- DH = Dual Horizontal (FTMH only)



FTM

FLEX SHROUD OPTIONS

(FTMH-DV only with 9 pins/row minimum)

- ES = End Shroud
- EC = End Shroud with Locking Clip (Manual placement required)
- EP = End Shroud with Guide Post (Use only when mating with CLM)

(FTM only)

- S = End Shroud (05 positions minimum). Molded or press fit shroud at Samtec's discretion (See assembly print at www.samtec.com?FTM for dimensions)







- SA = End Shroud with Alignment Pins (05 through 46 positions)

OTHER OPTIONS

- A = Alignment Pin (3 positions minimum) Metal or plastic at Samtec discretion (FTMH-DV only)
- K = (2,50 mm) .098" DIA Polyimide Film Pick & Place Pad (FTMH-DH only)
- P = Plastic Pick & Place Pad (-DV only) (6 positions minimum)
- TR = Tape & Reel

FTM	
OPTION	C
-S	(7,00) .276
-SA	(4,00) .157

FTM	
LEAD STYLE	D
-02	(1,91) .075
-03	(1,65) .065

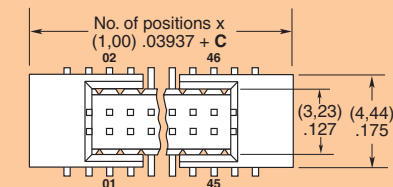

Shrouded options removed for clarity

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)