



Туре	:	Alkaline High Drain Button Cell
Chemical System	:	Alkaline Manganese Dioxide
Nominal Voltage	:	1.5Volts
Nominal Dimensions	:	Ø11.6mm×5.4mm
Application	:	Calculator, hearing aid, lighter, electronic, toy, camera, etc.
Average Weight	:	1.7g
Date Code	:	Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.
Shelf Life	:	Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 20 $\pm$ 2 $^{\circ}$ C 45-75%RH
Close Circuit Voltage	:	1.30 Volts (min.)(load resistor $100\Omega$ at 20 ± 2 °C for 0.1 to 2 seconds)
Nominal Service		255hrs (at 3.0 kΩ load)
Life(to 1.0V at 20 ± 2 °C)	•	175 days (at 50 kΩ load)
Average Service Capacity (to 1.0V at 20 ± 2 °C)	:	110mAh(at 6.2 kΩ load)
Cross References: IEC JIS Ev	er/	eady Varta Duracell
LR44 LR44 A	76	V13GA LR44

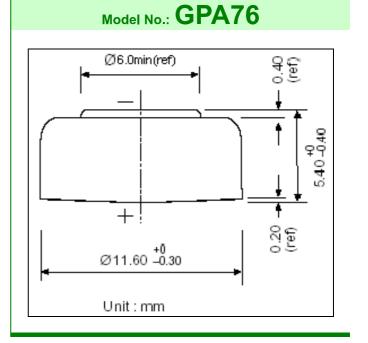

## Typical Discharge characteristics at 20 ± 2 °C




The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

## www.gpbatteries.com

BQS1001 Rev.03

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice

Copyright@GPI International Ltd. – All rights reserved



2 of 2

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for gp batteries manufacturer:

Other Similar products are found below:

GP14A S2 GP 15AU ULTRA PLUS B4 GP15E GP 1604 ULTRA PLUS GP 24AU ULTRA PLUS B4 11A B5 A76-U10 13A-U2 15A-U4 15AU-U4 164-U10 189-U10 24AU S2 27A B5 1604AU GP14E GP R20A 312G-U1 ZA13 LR1/910A CC61W-B1 GPR6AU/FO2 GP24A/FO2 SUPER GP X411 AA/AAA + 4X R6 2700MAH RECYKO PB570 + 4XAA 2700MAH PB50 H500 + 4X AA GP U411+ 4 X R6 2000MAH PRO GP U421+ 4 X R6 2100MAH GP U421+ 4 X R6 2600MAH GP U411+ 4 X R6 2600MAH GP XPLOR PH14 BB3 PB550 + 4XAA 2700MAH PB420 + 4XAA 2500MAH PB50 ZA10 B6 GP910A-20 186-U10 GP U211+ 2 X R6 2100MAH GP13G-C20 GP U811+ 4X R6 2100MAH GP XPLOR PH15 BB3 PB320 PB420 GP GP1604AU-C1 GP1604-10 13G U2 177-U10 GP1604GLF-2UE1 192-U10 24G-S2