

Ready-Made Insulated Thermocouples


Ω OMEGA®

A

5SRTC/5LRTC Series 5-Pack

- ✓ Available from Stock in Convenient 5-Packs
- ✓ NIST Calibration Available
- ✓ PFA Insulated Wire has Max Service Temp of 260°C (500°F)
- ✓ Glass Braid Insulated Wire has Max Service Temp of 480°C (900°F)
- ✓ Kapton® Insulated Wire has Max Service Temp of 260°C (500°F)
- ✓ Available in 1 and 2 m (40 and 80") Lengths
- ✓ Max Service Temp for Connector Body 220°C (425°F)

Custom Lengths,
Insulations, and
Configurations
Available

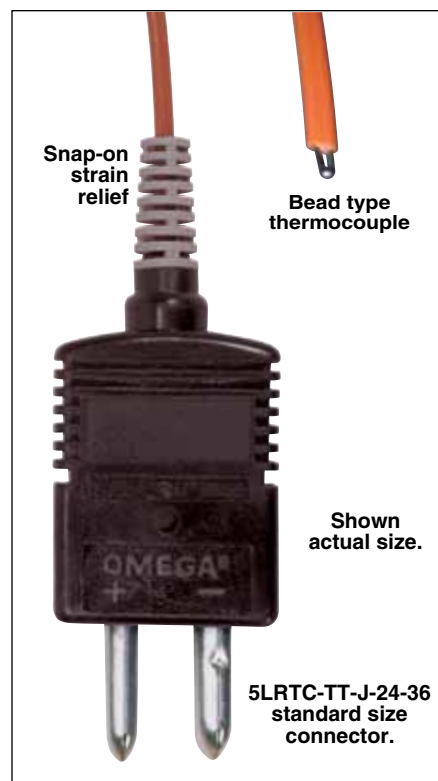

Miniature Size

Model Number ANSI Color Code	AWG Gage	Diameter mm (inch)	Insulation
5SRTC-GG-(*)-20-(**)	20	0.81 (0.032)	Glass Braid
5SRTC-GG-(*)-24-(**)	24	0.51 (0.020)	Glass Braid
5SRTC-GG-(*)-30-(**)	30	0.25 (0.010)	Glass Braid
5SRTC-TT-(*)-20-(**)	20	0.81 (0.032)	PFA
5SRTC-TT-(*)-24-(**)	24	0.51 (0.020)	PFA
5SRTC-TT-(*)-30-(**)	30	0.25 (0.010)	PFA
5SRTC-TT-(*)-36-(**)	36	0.13 (0.005)	PFA
5SRTC-TT-(*)-40-(**)	40	0.076 (0.003)	PFA
5SRTC-KK-(*)-20-(**)	20	0.81 (0.032)	Kapton
5SRTC-KK-(*)-24-(**)	24	0.51 (0.020)	Kapton
5SRTC-KK-(*)-30-(**)	30	0.25 (0.010)	Kapton

* Insert calibration J, K, T, or E. ** Specify length, insert "36" for 1 m or "72" for 2 m length.
Note: Add cost per additional 300 mm (1') per package of 5 on GG or TT wire.
 On KK wire add cost per additional 1 foot per package.

Ordering Example: 5SRTC-TT-K-36-72, 5-pack of Type K thermocouples with 2 m (80") of 36 AWG PFA insulated wire and a molded mini connector with snap-on strain relief.

Standard Size

To Order

Model Number ANSI Color Code	AWG Gage	Diameter mm (inch)	Insulation
5LRTC-GG-(*)-20-(**)	20	0.81 (0.032)	Glass Braid
5LRTC-GG-(*)-24-(**)	24	0.51 (0.020)	Glass Braid
5LRTC-TT-(*)-20-(**)	20	0.81 (0.030)	PFA
5LRTC-TT-(*)-24-(**)	24	0.51 (0.020)	PFA
5LRTC-KK-(*)-20-(**)	20	0.81 (0.032)	Kapton
5LRTC-KK-(*)-24-(**)	24	0.51 (0.020)	Kapton

* Insert calibration J, K, T, or E. ** Specify length, insert "36" for 1 m or "72" for 2 m length.
Note: Add cost per additional 300 mm (1') per package of 5 on GG or TT wire.
 On KK wire add cost per additional 300 mm (1') per package.

Ordering Example: 5LRTC-TT-K-20-72, 5-pack of standard size thermocouples with 2 m (80") of 20 AWG PFA insulated wire.

Ready-Made Insulated Thermocouples

with Standard or Miniature Size Spool Caddies


Custom Lengths,
Insulations, and
Configurations
Available!

5SC/5LSC 5-Pack




- ✓ Available from Stock in Convenient 5-Packs
- ✓ NIST Calibration Available
- ✓ Type J, K, T, and E Thermocouples
- ✓ Glass Braid Insulation Has Max Service Temp of 480°C (900°F)
- ✓ PFA Insulation Has Max Service Temp of 260°C (500°F)
- ✓ Kapton® Insulation Has Max Service Temp of 260°C (500°F)
- ✓ Stocked in 1 and 2 m (40 and 80") Lengths†
- ✓ Max Service Temp for Connector Body and Spool Caddy: 220°C (425°F)

Fine
40-Gage PFA
Insulated
Thermocouples

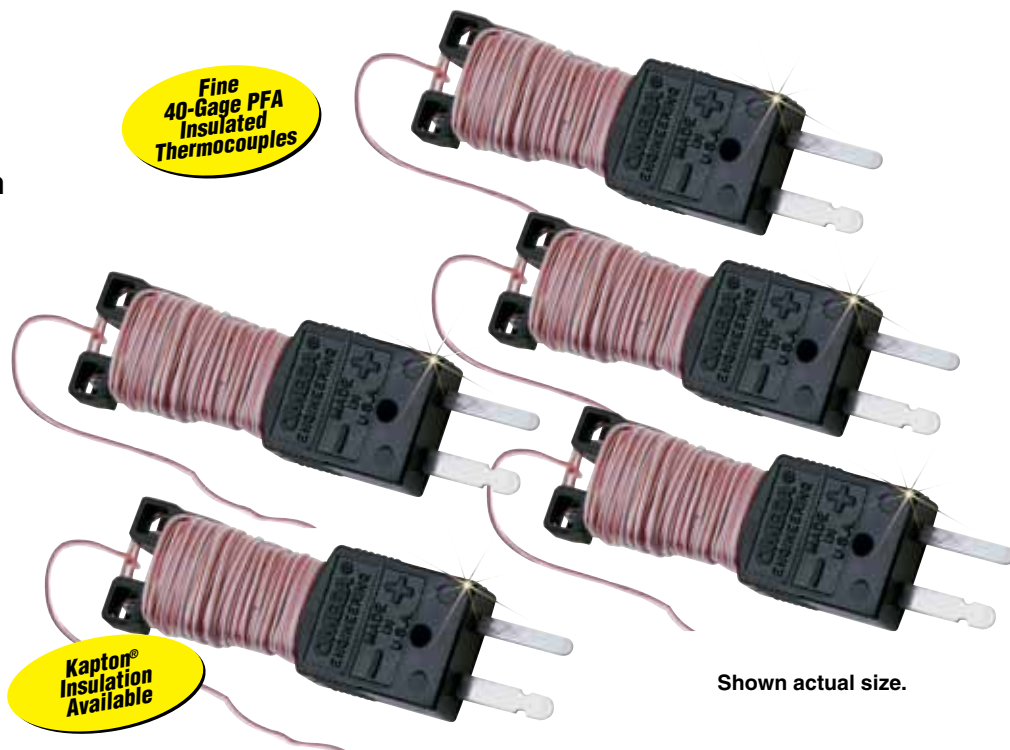

Kapton®
Insulation
Available

Shown actual size.

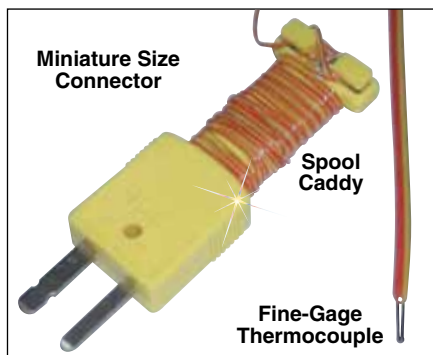


Miniature Size
Connector

Spool
Caddy

Fine-Gage
Thermocouple

Spool caddy provides a convenient way to store thermocouples.

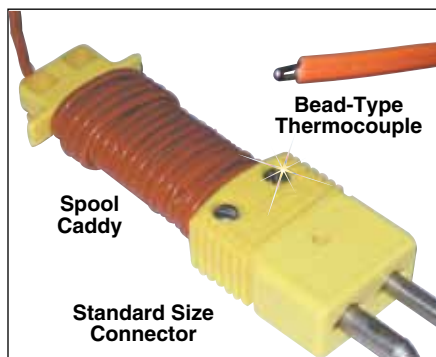

Spool
Caddy

Bead-Type
Thermocouple

Standard Size
Connector

Both connectors shown smaller than actual size.

Miniature SMP Spool Caddy Thermocouples

To Order

Model Number** ANSI Color Code	AWG Gage	Diameter mm (inch)	Insulation
5SC-GG-(*)-30-(**)	30	0.25 (0.010)	Glass Braid
5SC-TT-(*)-30-(**)	30	0.25 (0.010)	PFA
5SC-TT-(*)-36-(**)	36	0.13 (0.005)	PFA
5SC-TT-(*)-40-(**)	40	0.076 (0.003)	PFA
5SC-KK-(*)-30-(**)	30	0.25 (0.010)	Kapton

Standard OST Spool Caddy Thermocouples

Model Number ANSI Color Code	AWG Gage	Diameter mm (inch)	Insulation
5LSC-GG-(*)-20-(**)	20	0.81 (0.032)	Glass Braid
5LSC-GG-(*)-24-(**)	24	0.51 (0.020)	Glass Braid
5LSC-TT-(*)-20-(**)	20	0.81 (0.030)	PFA
5LSC-TT-(*)-24-(**)	24	0.51 (0.020)	PFA
5LSC-KK-(*)-20-(**)	20	0.81 (0.032)	Kapton
5LSC-KK-(*)-24-(**)	24	0.51 (0.020)	Kapton

* Insert calibration J, K, T or E. ** Specify length: insert "36" for 1 m or "72" for 2 m length.
† Consult Sales for additional lengths.

Note: Add cost per additional 300 mm (1') per package of 5 for GG or TT wire.
For KK wire add cost per additional 300 mm (1') per package.

Ordering Examples: 5SC-TT-K-36-72, 5-pack of Type K mini SMP spool caddy thermocouples with 2 m (80") 36 AWG PFA insulated wire.

5LSC-GG-K-20-72, 5-pack of Type K standard size spool caddy thermocouples with 2 m (80") 20 AWG glass braid insulated wire.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Omega](#) manufacturer:

Other Similar products are found below :

[DPG409-100DWU](#) [OM-DAQXL-1-NA](#) [CASS-116U-12](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#) [HPC-AU-P](#) [HPC-IR-P](#) [JMQSS-062U-6](#) [KHSS-18G-RSC-12](#) [KHXL-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-18G-12](#) [KQXL-18U-12](#) [NB1-CAXL-14U-12](#) [NB3-CAXL-14U-18](#) [P-M-1/10-1/4-6-0-P-3](#) [PX309-015A5V](#) [PX309-1KGI](#) [PX309-10KGV](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GI](#) [PX309-100GV](#) [PX309-3KG5V](#) [PX319-V050G5V](#) [PX319-005AI](#) [PX319-050A5V](#) [PX319-050GI](#) [PX319-10KGI](#) [PX319-100GV](#) [PX319-2KGI](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-5KG5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#) [PX329-10KGI](#) [PX329-2KGI](#) [PX409-015DWUI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-10WDWU5V](#)