
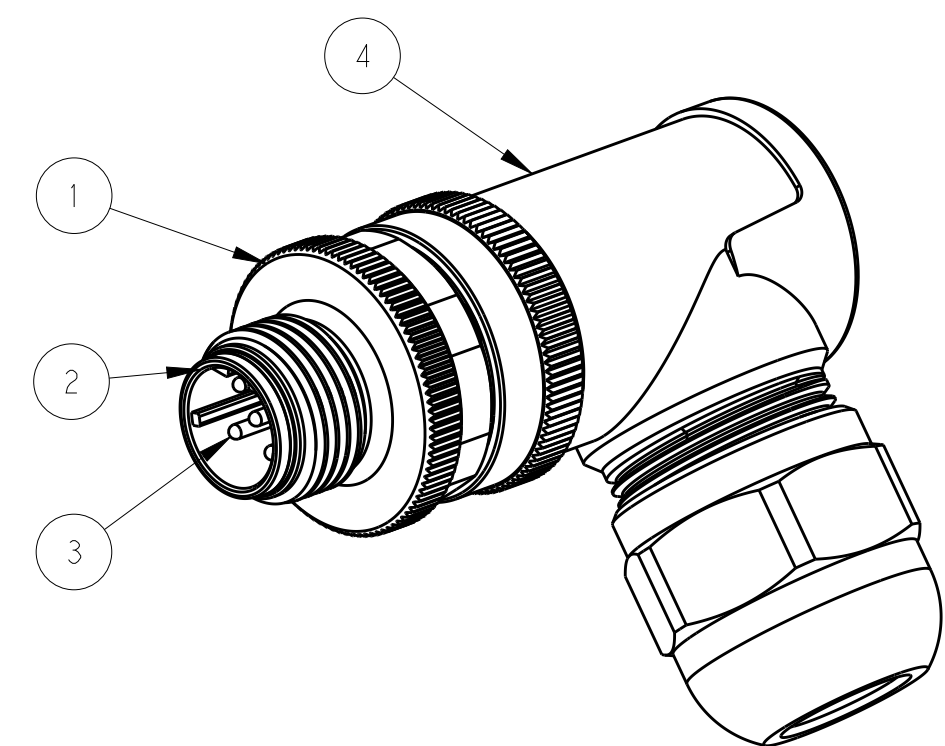
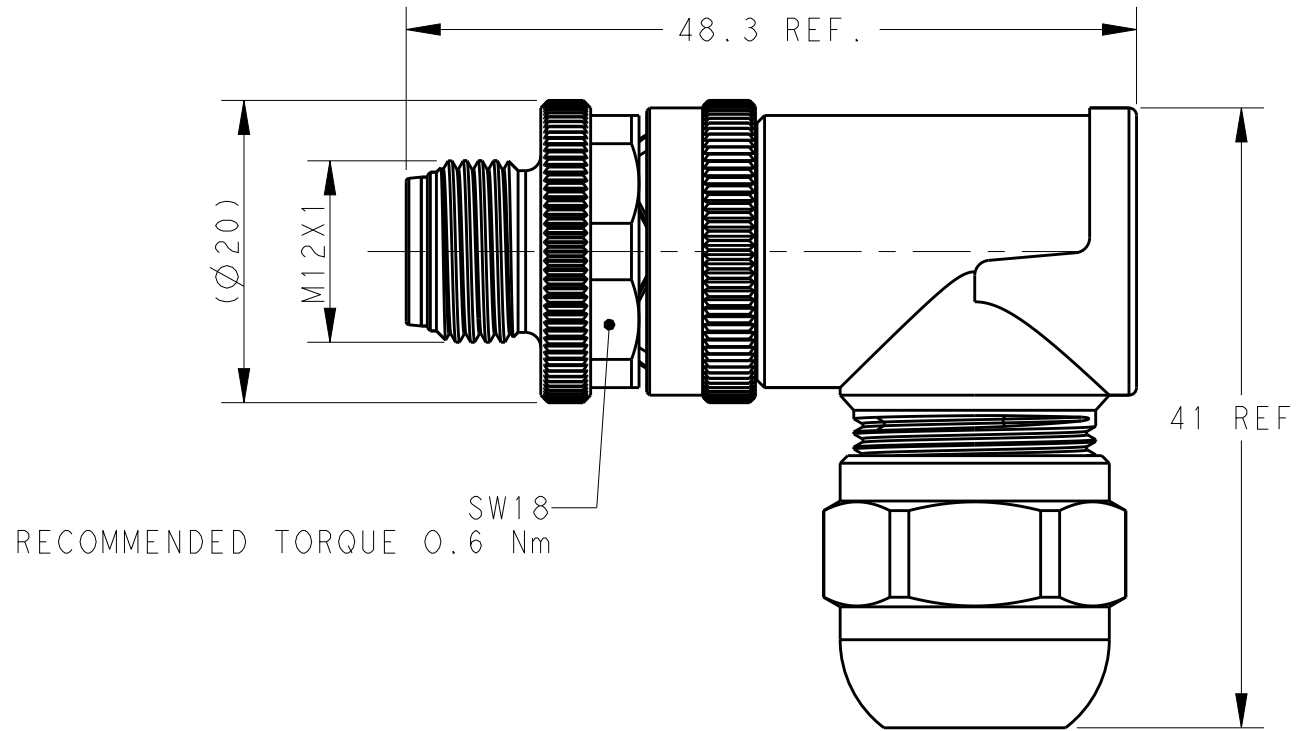


D

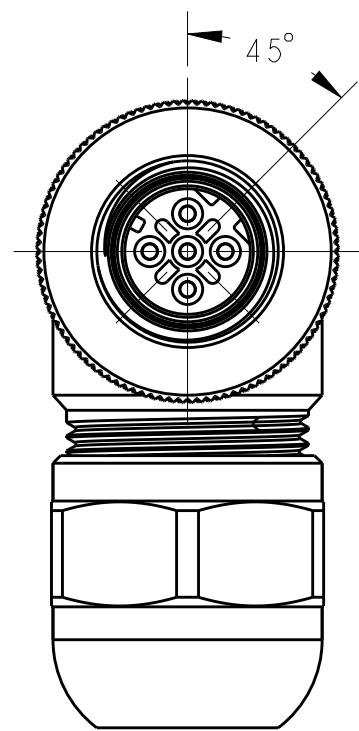

C

TECHNICAL DATA	T411351X02X-000	T411351X03X-000	T411351X04X-000	T411351X05X-000
RATED VOLTAGE	250V	250V	250V	60V
RATED CURRENT	4A	4A	4A	4A
POLLUTION DEGREE	3	3	3	3
OVERVOLTAGE CATEGORY	II	II	II	II
MATERIAL GROUP	II	II	II	II
CONTACT RESISTANCE	≤8mΩ	≤8mΩ	≤8mΩ	≤8mΩ
INSULATION RESISTANCE	>100MΩ	>100MΩ	>100MΩ	>100MΩ
DEGREE OF PROTECTION	IP67	IP67	IP67	IP67
OPERATION TEMPERATURE	-40~85°C	-40~85°C	-40~85°C	-40~85°C

B

PIN ARRANGEMENT D-CODE		
T411351X02X-000	T411351X03X-000	T411351X04X-000
T411351X05X-000		

A

T4113512051-000	RPC-M12D-MR-5CON-PG9-SHU
T4113511051-000	RPC-M12D-MR-5CON-PG7-SHU
T4113512052-000	RPC-M12D-MR-5CON-PG9-SH
T4113511052-000	RPC-M12D-MR-5CON-PG7-SH
T4113512041-000	RPC-M12D-MR-4CON-PG9-SHU
T4113511041-000	RPC-M12D-MR-4CON-PG7-SHU
T4113512042-000	RPC-M12D-MR-4CON-PG9-SH
T4113511042-000	RPC-M12D-MR-4CON-PG7-SH
T4113512031-000	RPC-M12D-MR-3CON-PG9-SHU
T4113511031-000	RPC-M12D-MR-3CON-PG7-SHU
T4113512032-000	RPC-M12D-MR-3CON-PG9-SH
T4113511032-000	RPC-M12D-MR-3CON-PG7-SH
T4113512021-000	RPC-M12D-MR-2CON-PG9-SHU
T4113511021-000	RPC-M12D-MR-2CON-PG7-SHU
T4113512022-000	RPC-M12D-MR-2CON-PG9-SH
T4113511022-000	RPC-M12D-MR-2CON-PG7-SH
TE PN	TYPE

NOTE:
1. MATERIAL:
ITEM NO.1:NUT -BRASS
ITEM NO.2:HOUSING -PA
ITEM NO.3:CONTACT -BRASS
ITEM NO.4: HOUSING BODY: -PBT+15%GF
2. CONTACT FINISH:
GOLD OVER NICKEL OR SILVER OVER NICKEL
3. CABLE WIRES:
18AWG/0.75mm² Max. FOR 2-5 PINS
20AWG/0.50mm² Max. FOR 8 PINS
4. ALLDIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED
5. PACKAGEING: 1PIECE IN A BAG
6. PN INFORMATION

T411351XXXX-000
CONTACT FINISH:
1: GOLD OVER NICKEL
2: SILVER OVER NICKEL
NUMBERS OF PINS:
02: 2 PINS
03: 3PINS
04: 4 PINS
05: 5PINS
08: 8 PINS
CABLE OUTLET:
1: PG7(CABLE FEED: 4-6mm)
2: PG9(CABLE FEED: 6-8mm)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24AUG2015 Nick Pan	TE Connectivity			
DIMENSIONS:		CHK 24AUG2015 Kobby Zhao				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 24AUG2015 Xiang Xu	NAME			
mm		PRODUCT SPEC	M12 MALE, RIGHT ANGLE SHIELDED CONNECTOR D CODE, SCREW TERMINAL			
		108-106140	SIZE			
MATERIAL		114-137144	CAGE CODE			
-		WEIGHT	DRAWING NO			
-		Customer Drawing	RESTRICTED TO			
			SCALE 2:1			
			SHEET 1 OF 1			
			REV A1			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) ***category:***

Click to view products by [TE Connectivity](#) ***manufacturer:***

Other Similar products are found below :

[1424048](#) [1021212](#) [600X518037X](#) [6STD09SAM99B70X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [1200910002](#) [1201150041](#) [1203580030](#)
[1200700064](#) [1200700263](#) [1200700416](#) [1200730102](#) [1200770002](#) [1-2823588-2](#) [130203-0054](#) [1300140026](#) [1300150099](#) [1-3637-600-5205](#)
[1545399](#) [1594331](#) [1600413](#) [1612606](#) [1612618](#) [1614660](#) [1A4000-348](#) [CA06EW24-10P-B-03](#) [21036836414](#) [2823064-1](#) [1610759](#) [A1642LK-](#)
[I1-T](#) [1R3006A20M005](#) [41-01016](#) [41-40011](#) [41-40017](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00002](#) [43-00113](#) [43-00130](#)
[43-01028](#) [43-01034](#) [43-01088](#) [43-01090](#) [43-01203](#) [43-01209](#) [43-01335](#)