

Round Heat Pipe

ATS Part#: ATS-HP-D4L150S33W-117

Description: Closed evaporator-condenser heat transfer systems. A heat pipe's wick structure and embedded liquid enables it to produce a very high heat flux transport capability, which can be 10-20 times higher than the equivalent diameter solid copper pipe. Round heat pipes offer advantages for certain fin configurations at the condenser end.




For Illustration Purposes ONLY.

Features & Benefits

- » Tube material: copper
- » Wick structures: grooved or sintered copper powder
- » High thermal conductivity
- » Light weight
- » Fast thermal response

Applications for Heat Pipes

- » Compact Electronics Enclosures
- » Aerospace
- » Medical
- » Consumer Electronics
- » HVAC

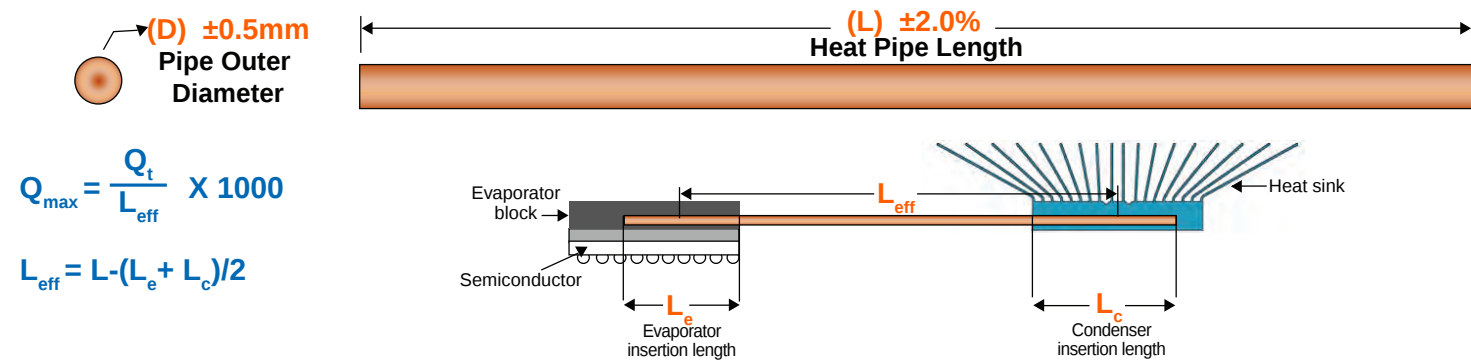

PRODUCT SPECIFICATIONS

L=Length (mm); D=Diameter (mm); WT=Wick Type (S=Sintered, G=Grooved); WF=Working Fluid; TR=Temperature Range (°C)

Product Detail


Part Number	L	D	Wick Type	Working Fluid	Temp Range (°C)	QT (w.m)	L _{eff} (mm)	Q _{max} (W)	L _{eff} (mm)	Q _{max} (W)	L _{eff} (mm)	Q _{max} (W)
ATS-HP-D4L150S33W-117	150	4	Sintered	Distilled H ₂ O	30-120	2.50	60	41.7	75	33.4	90	27.8

SUGGESTED MINIMUM BEND RADIUS ON ATS HEAT PIPES

Heat Pipe Diameter in mm	Minimum Bend Radius in mm
4	12
5	15
6	18
7	21
8	24

HEAT PIPE JOINING TECHNIQUES

- 1) For small batches/prototypes, heat pipes can be joined to heat sinks or other pieces with thermal epoxy.
- 2) For optimal results, heat pipes should be soldered using low temperature solder at temperatures above 139°C but no greater than 250°C.

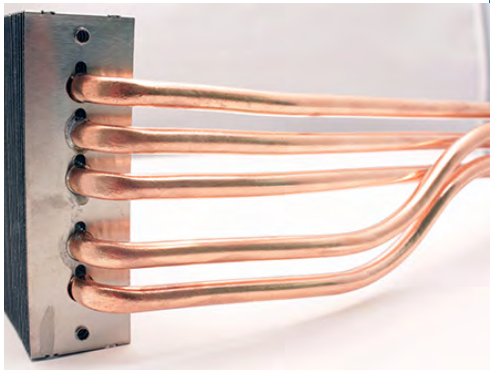

For further technical information, please contact Advanced Thermal Solutions, Inc.
by phone: **1-781-769-2800**, email ats-hq@qats.com or visit www.qats.com.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Sinks](#) category:

Click to view products by [Advanced Thermal Solutions](#) manufacturer:

Other Similar products are found below :

[656-15ABPE](#) [657-20ABPNE](#) [73452PPBA](#) [PR19/35/SE](#) [120-1873-007](#) [218-40CTE3](#) [231-69PAB-15V](#) [231-75PAB-13V](#) [231-75PAB-15V](#)
[253-122ABE-22](#) [PSC22CB](#) [CLP212SG](#) [BDN163CBA01](#) [BDN183CBA01](#) [LAE66A3CB](#) [511-3U](#) [73381PPBA](#) [73403PPBA](#) [7G0047C](#) [8191-](#)
[E40](#) [510-12M](#) [D10650-40T5](#) [6225B-MT6G](#) [ATS-54310K-C2-R0](#) [657-20ABPESC](#) [2341BG](#) [679-25AG](#) [6801G](#) [680-5K](#) [SK 470 35 STS](#)
[7717-133DAP](#) [4509](#) [APF30-30-10CB/A01](#) [268-85CTE](#) [43808-04](#) [BDN123CBA01](#) [512-9M](#) [BDN113CBA01](#) [ATS-PF1K-C1-R0](#) [43806-04](#)
[40139](#) [30195](#) [1542500-1](#) [139-3J](#) [392-180AG](#) [1963872-1](#) [7717-5N](#) [527-45AB-T725](#) [MTN-264-55](#) [UP1-348-CB](#)