


Solid State Relay

SMA Series Single Phase AC Output

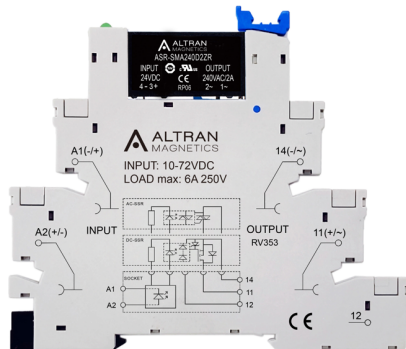

- Optoelectronic Isolation
- TRIAC Output
- Load Voltage:240VAC
- Load Current:1A,2A
- Dielectric Strength 2500VACrms
- PCB Mounted
- RoHS Compliant

ASR	—	SM	A	240	D	1	R	N	-K
	Packing - : Bulk pack A-Z	SM Series	Load Type A:AC Load	Load Voltage 240:240VAC	DC Control	Load Current 1: 1Amp 2: 2Amp	Switching Mode Z:Zero Crossing R:Random-on	Control Voltage N: 5VDC P: 12VDC R: 24VDC S: 48VDC T: 60VDC	None: No Socket K: with Socket

Technical Specification

INPUT CIRCUIT(TA=25°C)		
Control Voltage Range	N	4-6VDC
	P	9.6-14.4VDC
	R	19.2-28.8VDC
	S	38.4-57.6VDC
	T	48-72VDC
Must Turn-on Voltage ⁽¹⁾	N	4VDC
	P	9.6VDC
	R	19.2VDC
	S	38.4VDC
	T	48VDC
Must Turn-off Voltage		1VDC
Maximum Input Current		25mA

Solid State Relay



SMA Series Single Phase AC Output

OUTPUT CIRCUIT(TA=25°C)		
Load Voltage Range (47Hz-63Hz)		24-280VAC
Maximum Transient Overvoltage		600Vpk
Load Current Range	1A	0.1 - 1A
	2A	0.1 - 2A
Maximum Turn-On Time	Random-on	1ms
	Zero Crossing	10ms
Maximum Turn-Off Time		300μs
Maximum Surge Current [@10 ms]	1A	30A
	2A	40A
Maximum Off-State Leakage Current [@ Rated Voltage]		1.5mA
Maximum On-State Voltage Drop [@ Rated Current]		1.5Vrms
Maximum On-State Voltage Drop [@ Rated Current]		200V/μs
GENERAL INFORMATION (TA=25°C)		
Dielectric Strength, Input/Output(50/60Hz)		2500Vrms
Insulation Resistance(@500VDC)		1000MΩ
Ambient Operating Temperature Range		-30°C +80°C
Ambient Storage Temperature Range		-30°C +100°C
Weight (Typical)	ASR-SM240...-...Series	4g
	ASR-SM240...-...K Series	30g



Solid State Relay

SMA Series Single Phase AC Output


Installation

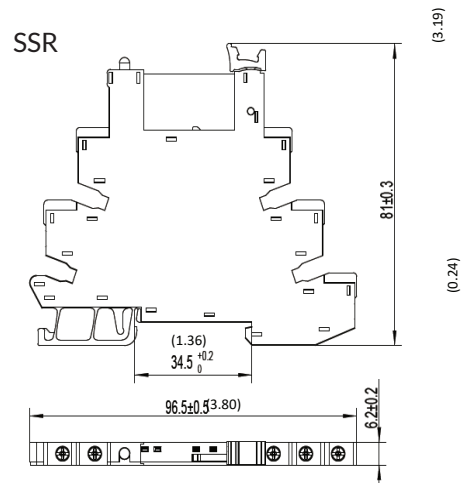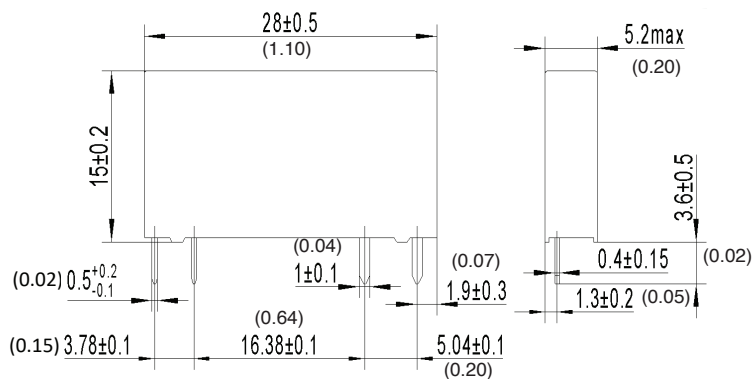

Wiring Diagram

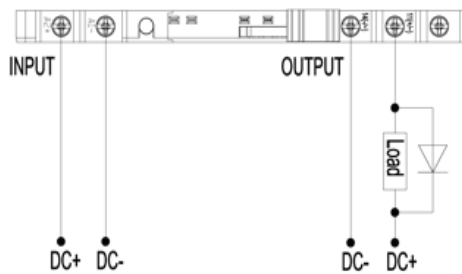

ASR-SMD...D...-NK Series

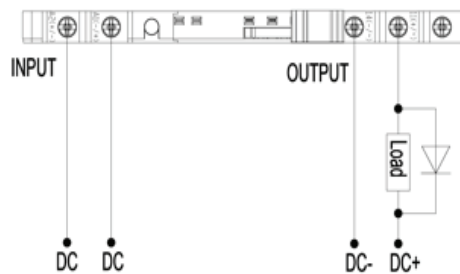

ASR-SMD...D...-P/R/S/TK Series

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - SSRs](#) category:

Click to view products by [Altran Magnetics](#) manufacturer:

Other Similar products are found below :

[GA5-6D25V](#) [6441](#) [SSRT-120A10](#) [SSR-240A80](#) [AD4C212](#) [AD6-C250](#) [AD8-C111](#) [S111](#) [1SNA645047R0000](#) [1SVR405610R4060](#)
[SCI0501200](#) [SGT7650500](#) [SGT8690500](#) [SGT8850200](#) [SGT8858200](#) [SGT9834300](#) [SGT9874300](#) [SMB8650510](#) [SMB8850210](#)
[77.01.9.024.9024](#) [77.01.9.024.9125](#) [SSP3A250BDT](#) [6410AXXTZS-DC3](#) [6440DTX-1](#) [6475ASX-1](#) [66125AXXSZS-AC90](#) [6690AXXSZS-](#)
[AC90](#) [84134080](#) [861SSR410-DC-2](#) [861SSR610-AC-2](#) [861SSR610-DC-2](#) [A2450EGH](#) [1SNA645022R2700](#) [1SNA645025R2200](#)
[1SNA645029R0600](#) [1SNA645051R0400](#) [ASR-SI240A10RY-L](#) [ASR-SI240A10ZY-LV](#) [ASR-SI240D10R-LRV](#) [ASR-SI240D10RW-L](#) [ASR-](#)
[SI240D10Z-LR](#) [ASR-SI240D25Z-LRQ](#) [ASR-SI240D25ZW-LM](#) [ASR-SI240D40RW-L](#) [ASR-SI480A25RY-LV](#) [ASR-SI480D25RW-L](#) [ASR-](#)
[SI480D40RW-L](#) [ASR-SI480D40ZW-L](#) [ASR-SI240D25ZW-LP](#) [ASR-SID240D50ZL-S](#)