


Solid State Relay

ASR-SMD DC Output



- Optoelectronic Isolation
- Load Voltage: 24VDC, 48VDC
- Load Current: 0.1A, 2A, 3A, 4A
- PCB Mounted
- Transistor or MOSFET Output
- Dielectric Strength 2500VACrms
- RoHS Compliant

ASR	—	SMD	48	D	3	N	-K
	Packing - : Bulk pack A-Z	SMD Series	Load Voltage 24: 24VDC 48: 48VDC	Control Voltage D:DC Control	Load Current 0.1:0.1 Amps 2:2 Amps 3:3 Amps 4:4 Amps	Control Voltage N: 5VDC P: 12VDC R: 24VDC S: 48VDC T: 60VDC	None: No Socket K: With Socket

Technical Specification

INPUT CIRCUIT(TA=25°C)		
Control Voltage Range	N	4-6VDC
	P	9.6-14.4VDC
	R	19.2-28.8VDC
	S	38.4-57.6VDC
	T	48-72VDC
Must Turn-on Voltage ⁽¹⁾	N	4VDC
	P	9.6VDC
	R	19.2VDC
	S	38.4VDC
	T	48VDC
Must Turn-off Voltage	N	1VDC
	P	2.4VDC
	R	2.4VDC
	S	4.8VDC
	T	4.8VDC

Solid State Relay

ASR-SMD DC Output


Must Turn-off Voltage	N	25mA (@6VDC)v
	P	25mA (@14.4VDC)
	R	25mA (@28.8VDC)
	S	23mA (@57.6VDC)
	T	23mA (@72VDC)
OUTPUT CIRCUIT(TA=25°C)		
Load Voltage Range	24	3-28VDC
	48	3-58VDC
Maximum Transient Overvoltage	24	33VDC
	48	58VDC
Load Current Range	0.1A	0.001 - 0.1A
	2A	0.002 - 2A
	3A	0.002 - 3A
	4A	0.002 - 4A
Maximum Turn-On Time		300μs
Maximum Turn-Off Time		300μs
Maximum Surge Current [@10 ms]	0.1A	1A
	2A	20A
	3A	30A
	4A	48A
Maximum Off-State Leakage Current [@ Rated Voltage]		0.1mA
Maximum On-State Voltage Drop [@ Rated Current]	0.1A	1.5VDC
Maximum On-State Resistance	2A/3A/4A	37mΩ

Solid State Relay


ASR-SMD DC Output

GENERAL INFORMATION (TA=25°C)		
Dielectric Strength, Input/Output(50/60Hz)		2500Vrmsv
Insulation Resistance		1000MΩ(@500VDC)
Ambient Operating Temperature Range		-30°C +80°C
Ambient Storage Temperature Range		-30°C +100°C
Weight (Typical)	ASR-SMD...-...Series	4g
	ASR-SMD...-...K Series	30g

Installation


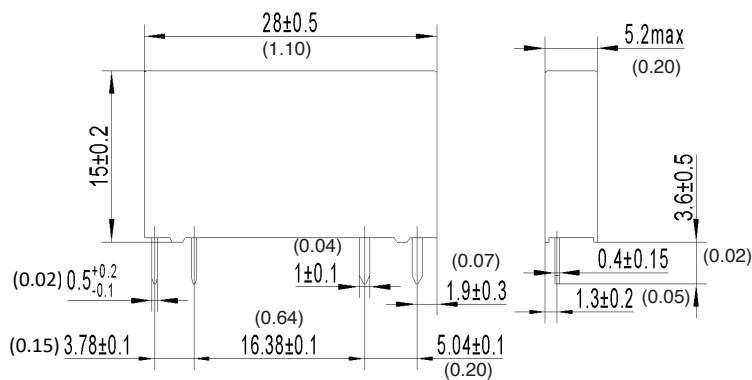


SSR

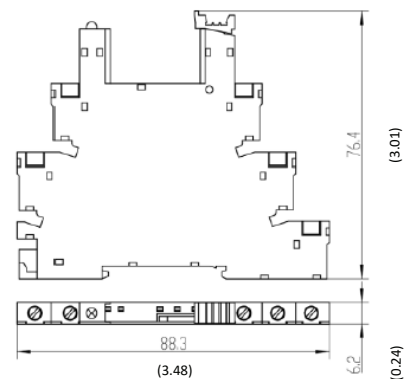


With Socket

Wiring Diagram

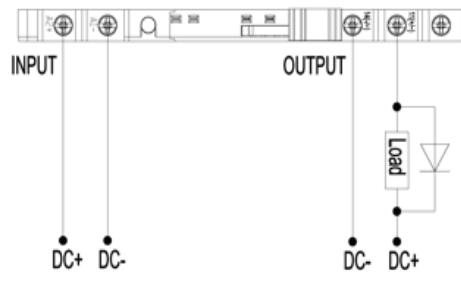

ASR-SMD...D...-NK Series

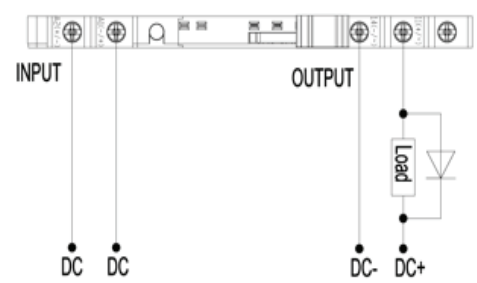

ASR-SMD...D...-P/R/S/TK Series

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - SSRs](#) category:

Click to view products by [Altran Magnetics](#) manufacturer:

Other Similar products are found below :

[GA5-6D25V](#) [6441](#) [SSRT-120A10](#) [SSR-240A80](#) [AD4C212](#) [AD6-C250](#) [AD8-C111](#) [S111](#) [1SNA645047R0000](#) [1SVR405610R4060](#)
[SCI0501200](#) [SGT7650500](#) [SGT8690500](#) [SGT8850200](#) [SGT8858200](#) [SGT9834300](#) [SGT9874300](#) [SMB8650510](#) [SMB8850210](#)
[77.01.9.024.9024](#) [77.01.9.024.9125](#) [SSP3A250BDT](#) [6410AXXTZS-DC3](#) [6440DTX-1](#) [6475ASX-1](#) [66125AXXSZS-AC90](#) [6690AXXSZS-](#)
[AC90](#) [84134080](#) [861SSR410-DC-2](#) [861SSR610-AC-2](#) [861SSR610-DC-2](#) [A2450EGH](#) [1SNA645022R2700](#) [1SNA645025R2200](#)
[1SNA645029R0600](#) [1SNA645051R0400](#) [ASR-SI240A10RY-L](#) [ASR-SI240A10ZY-LV](#) [ASR-SI240D10R-LRV](#) [ASR-SI240D10RW-L](#) [ASR-](#)
[SI240D10Z-LR](#) [ASR-SI240D25Z-LRQ](#) [ASR-SI240D25ZW-LM](#) [ASR-SI240D40RW-L](#) [ASR-SI480A25RY-LV](#) [ASR-SI480D25RW-L](#) [ASR-](#)
[SI480D40RW-L](#) [ASR-SI480D40ZW-L](#) [ASR-SI240D25ZW-LP](#) [ASR-SID240D50ZL-S](#)