
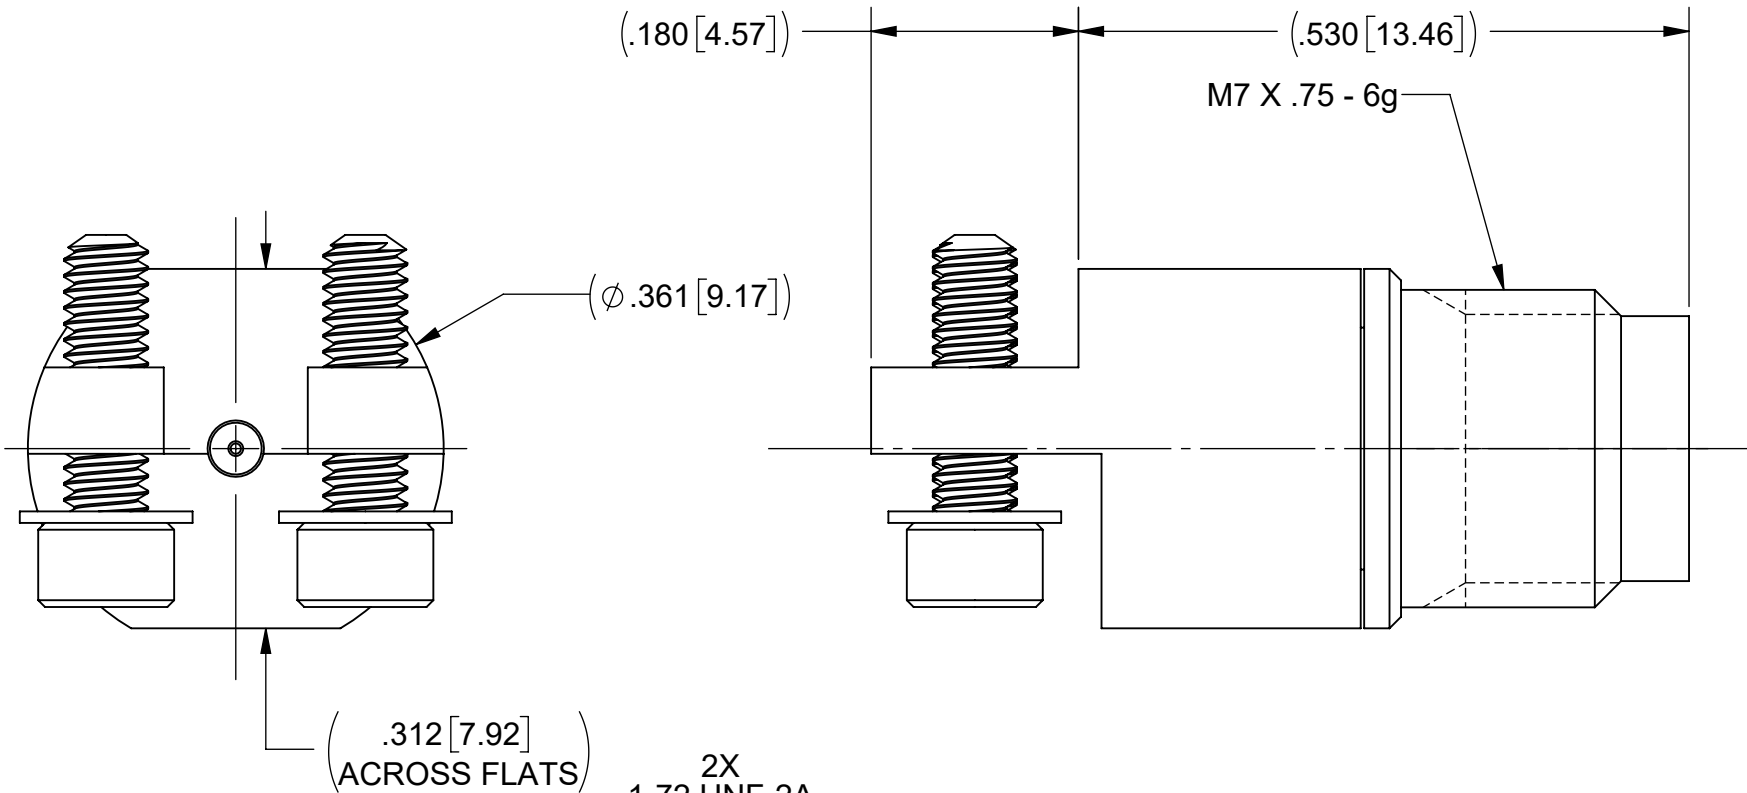


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	DCN 54597	6/24	SEE PDM

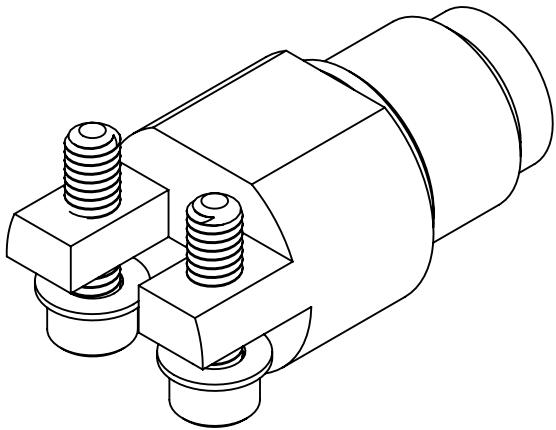

MATERIAL:

BODIES & INSERT:	STAINLESS STEEL PER AMS 5640, ALLOY UNS S30300, TYPE 1 OR ASTM A582 TYPE 303, CONDITION A.
CONTACT:	BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04.
PIN:	KOVAR PER ASTM-F15
GLASS:	CORNING 7070
BEAD:	ULTEM 1000
SCREWS AND WASHERS:	18-8 STAINLESS STEEL

FINISH:


BODIES, CONTACT & PIN:	GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.
------------------------	--

INSERT:	PASSIVATED PER AMS 2700
---------	-------------------------


PERFORMANCE:


IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 50.0 GHz.

- NOTES:
- MOUNTING SCREWS INTENDED FOR USE AS A SOLDER REFLOW FIXTURING AID.

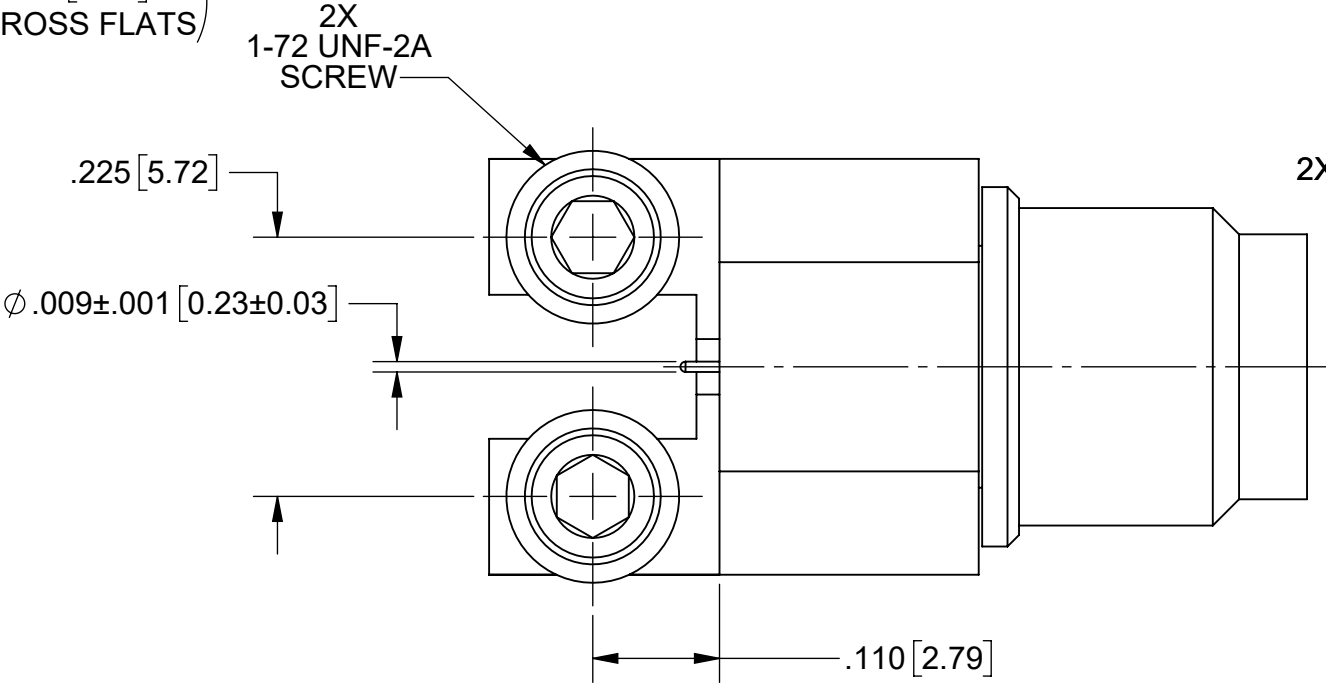

RECOMMENDED MOUNTING PATTERN

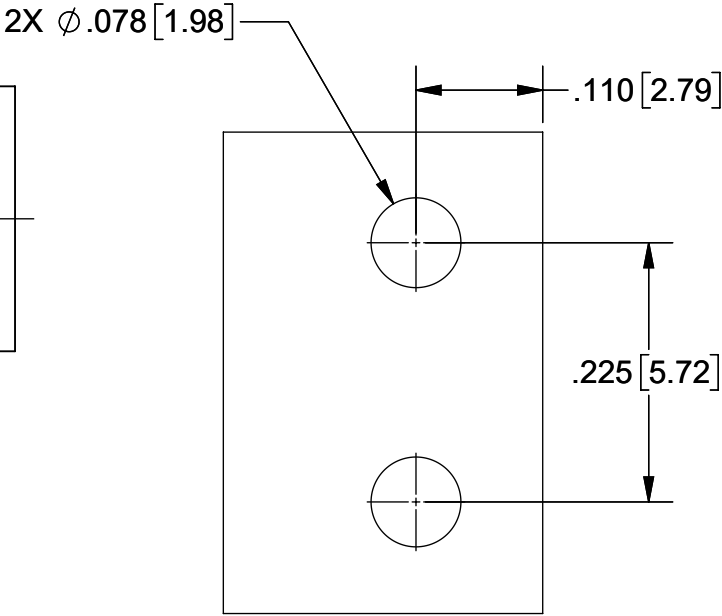

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIED	 www.svmicrowave.com	
FINISH:	SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'	1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS		
SURFACE AREA:	N/A	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	TITLE: 2.4mm F TORQUE RESISTANT EDGE LAUNCH CONNECTOR	
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION	DRAWN: JPM 6/12/24	SIZE DWG. NO.	1621-60092
			CHECKED: SEE PDM APPROVED: SEE PDM	SCALE: 6:1	SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) ***category:***

Click to view products by [Amphenol](#) ***manufacturer:***

Other Similar products are found below :

[6002-7051-003](#) [6059674-1](#) [630059-000](#) [M55339/15-00491](#) [7002-1541-010](#) [7002-1572-002](#) [7003-1572-002](#) [7004-1512-000](#) [7009-1511-004](#)
[7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7405-1521-005](#) [7405-1521-019](#) [7405-1521-802](#) [755-74-5](#) [7706-2](#) [873183](#)
[PL375-33](#) [95-850-148-3](#) [R107003010W](#) [R112186000](#) [R113082097](#) [R113236000](#) [R113240097](#) [R114083000](#) [R114670000W](#) [R121053000](#)
[R124072220W](#) [R124076450](#) [R124175123](#) [R125075001](#) [R125414001](#) [R125415030](#) [R125415271](#) [R141007161](#) [R141574161W](#)
[R142004000W](#) [R142076000W](#) [R142076161W](#) [R142184000W](#) [R142676700](#) [R143012000](#) [R143075000W](#) [R143089117](#) [R143235161W](#)
[R143292700](#) [R143557000](#) [R161008000](#)