

VSP pressure sensor

For oil pressure applications

DESCRIPTION

One of our smallest pressure sensors, the VSP has a robust and submersible design which makes it a reliable partner for any oil pressure application in motor and commercial vehicles. The VSP is able to measure absolute or relative pressure in a nominal pressure range of up to 600 bar. The specially developed evaluation electronics make it possible to take very precise and stable measurements at temperatures of up to 150 °C, even under tough conditions. In addition, the VSP also complies with the high ESD and EMC standards applicable in the automobile industry. Our assembly machines have a wide range of flexible settings enabling a customised production of the sensor and an optimal adaption to the respective application.



FIELDS OF APPLICATION

Oil pressure applications in motor and commercial vehicles

- Braking systems
- Powertrain

Measurement and testing technology



© iStockphoto.com - Ke Yu

KEY FEATURES

Robust, minimised design

Specially developed measurement element and evaluation electronics

Numerous electrical connections and output signals available

BENEFITS

- Submersible, oil-proof version available
- Compatible with standard oils used in the automotive industry
- Suitable for applications with limited installation space
- Optionally with lightweight aluminium housing

- High-precision version available
- For use at temperatures up to 150 °C
- Reliable, stable measurements over the entire life cycle
- Automotive-tested EMC / ESD resistance

- Simple and flexible integration, also in existing systems

Technical specification

VSP pressure sensor



Pressure ranges

Nominal pressure	0.2 ... 50 bar, absolute 0.2 ... 600 bar, relative ¹⁾
Pressure reference type	Relative and absolute pressure
Overpressure	2x nominal pressure
Bursting pressure	3x nominal pressure

Electrical characteristics

Supply voltage	9 ... 30 V 12 ... 30 V 5 ± 0.5 V
Supply current	typ. 10 mA
Output signal	4 ... 20 mA, 2 wire system 0 ... 5 V, 1 ... 6 V, 0 ... 10 V 0.5 ... 4.5 V, ratiometric
Overvoltage protection ²⁾	± 30 V
Reverse polarity protection ²⁾	± 30 V

Mechanical characteristics

Measurement element	Stainless steel Silicon sensing element (also with stainless steel membrane and oil filled)
Case material	Stainless steel, aluminium
Pressure connection	HEX 19, M10x1, G1/4" male thread ³⁾
Electrical connection	MQS plug, Packard plug, M12x1 plug ³⁾
Installation position	Arbitrary
Weight	Approx. 30 g (stainless steel) Approx. 15 g (aluminium)


Accuracy

Total error ⁴⁾ (Standard version)	± 1% FS (0 ... 90 °C) ± 2% FS (-40 ... 125 °C)
Total error ⁴⁾ (High-precision version)	± 0.2% FS

Environmental conditions

Operating temperature range	-40 ... 125 °C (150 °C)
Media temperature range	-40 ... 125 °C (150 °C)
Media compatibility	Engine and gear oils, major- ity of liquid and gas media
ESD (DIN EN 61000-4-2) ²⁾	± 8 kV to contacts ± 15 kV to case
EMC (ISO 11452) ²⁾	250 V/m 200 mA (BCI)

Dimension

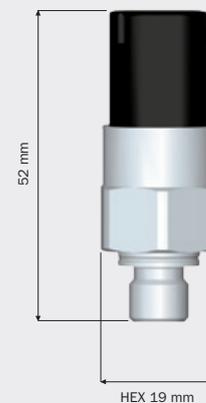

1) Initial value of -1 bar possible for relative pressure

2) Depending on the output signal and application

3) Other pressure connections and electrical connections available on request

4) Covers repeatability, hysteresis, non-linearity (TBL), calibration and temperature effects; depending on the pressure and temperature range

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Pressure Sensors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[75380-05](#) [76053-00000300-01](#) [76053-00000300-05](#) [76061-00000015-01](#) [76062-B00000350-01](#) [76063-00000350-05](#) [76083-05000500-01](#)
[76311-05](#) [76577-00000070-01](#) [76584-M00000100-24](#) [77343-24.0H2-01](#) [77343-25.0H2-01](#) [78291-B00000060-01](#) [78303-B00000400-01](#)
[78303-B00000400-05](#) [78316-B00000030-01](#) [78353-B00000020-05](#) [78665-00000014-05](#) [78677-B00000070-05](#) [78678-00000040-01](#) [79279-](#)
[00000060-01](#) [79296-B00000350-01](#) [79322-00250035-01](#) [79614-30.0H2-14](#) [79670-00000090-15](#) [79700-00002750-01](#) [79917-B00000280-01](#)
[80569-00700100-01](#) [81509081](#) [81739-B00000900-01](#) [81807-B00000020-01](#) [MLH010BST01A](#) [MLH010BST14A](#) [MLH025BGC13B](#)
[MLH025BSCDJ1292](#) [MLH025BSCDJ1303](#) [MLH750PSCDJ1245](#) [82903-B00000020-01](#) [83250-02500600-05](#) [83271-00000040-04](#) [83278-](#)
[B00000200-21](#) [83286-00000150-01](#) [83299-00000150-05](#) [83303-00000600-01](#) [83305-00001350-01](#) [83330-00000100-01](#) [83349-00001470-24](#)
[83350-04.0HG-05](#) [83350-15.0H2-05](#) [83357-00000030-21](#)