

# AS series

Snap-in rocker switches



## DISTINCTIVE FEATURES

- Double insulation
- Epoxy sealed terminals
- UL approved



## ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
  - silver contacts (code 1) and gold plated silver contacts (code 2) : 4 A 30 VDC
  - gold plated brass contacts (code 0) : 0.4 VA 20 V AC or DC
- Initial contact resistance : 10 mΩ max.
- Insulation resistance : 10,000 MΩ min.
- Dielectric strength :
  - 1,000 Vrms 50 Hz min. between terminals
  - 4,000 Vrms 50 Hz min. between terminals and metal panel
- Electrical life : 50,000 cycles



## GENERAL SPECIFICATIONS

- Panel thickness : 1 (.039) to 3 mm (.118) max.
- Operating temperature : -40 °C to +85 °C (-40 °F to +185 °F)



## MATERIALS

- Case : PES
- Actuator : polyamide
- Contacts
  - 0 : brass, gold plated
  - 1 : silver
  - 2 : silver, gold plated
  - 5 : special contact, lower rating
 Minimum quantity : consult factory.
- Terminal seal : epoxy

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.

The company reserves the right to change specifications without notice.




# AS series

Snap-in rocker switches



## PANEL CUT-OUT



## AGENCY APPROVALS




2 A 250 VAC  
4 A 125 VAC

**Availability** : consult factory for details or approved models.


**Marking** : to order switches marked with above approvals, complete last box of ordering format.




## ELECTRICAL FUNCTIONS



## TERMINALS




Straight PC



Solder lug



### BUILD YOUR PART NUMBER

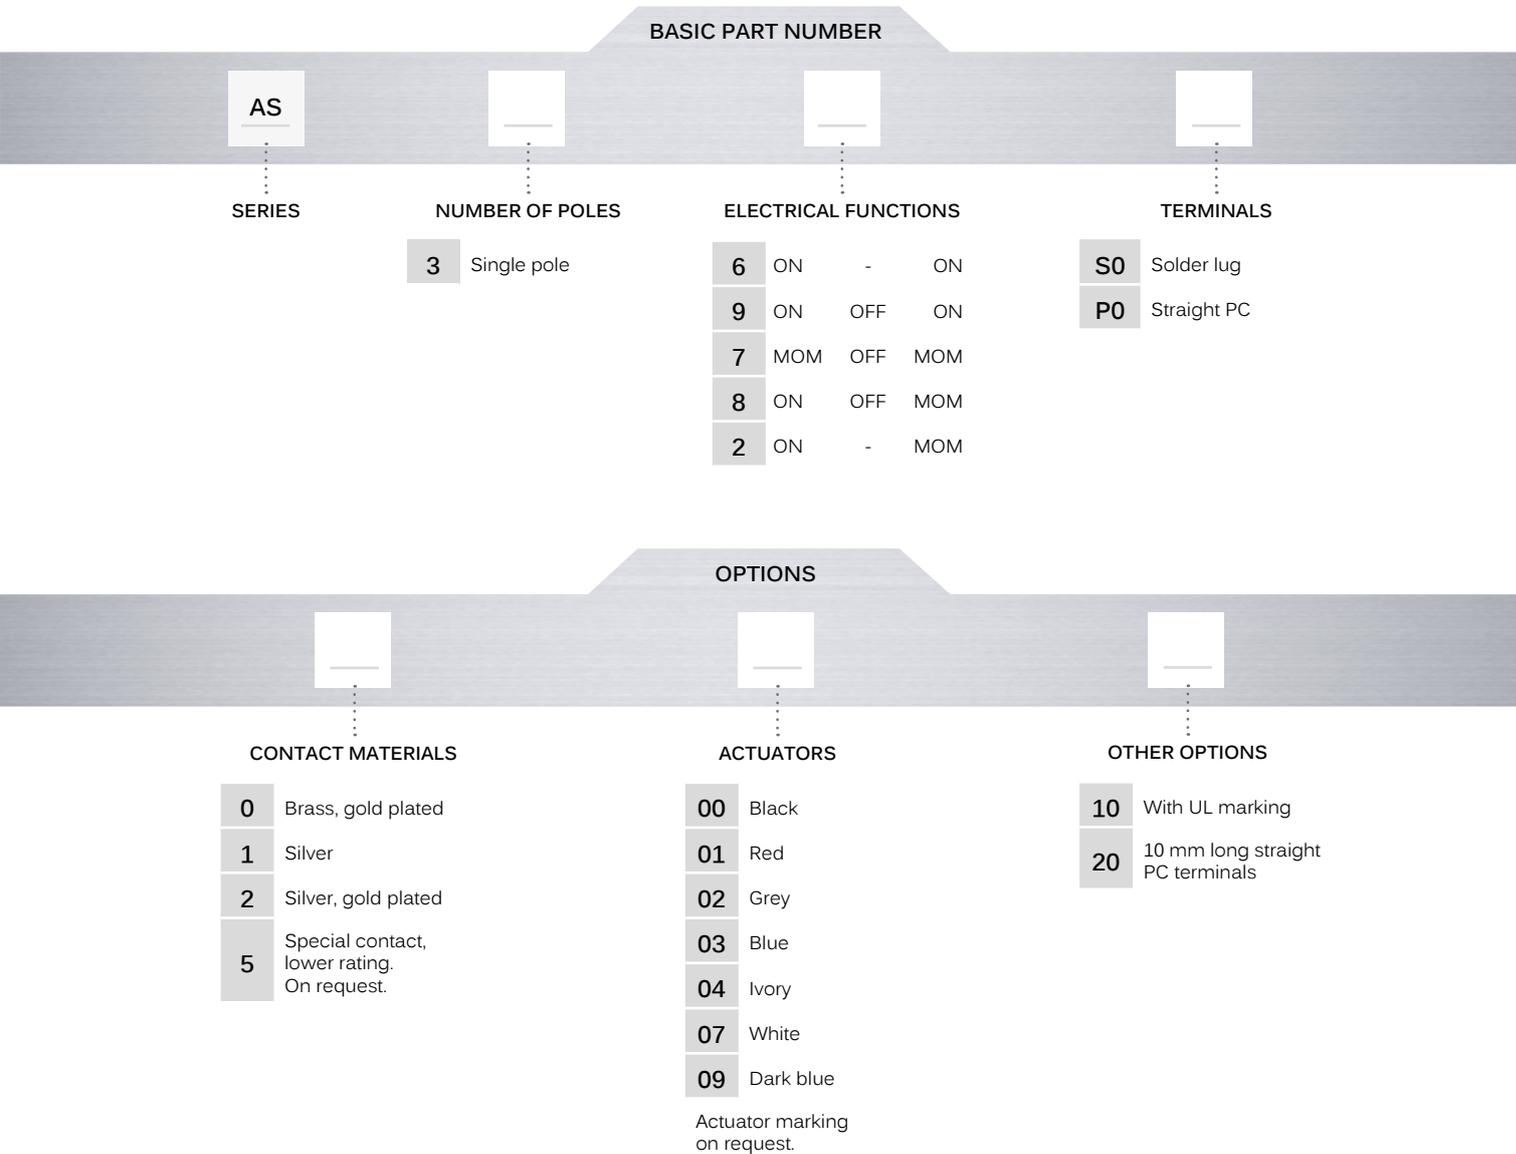

### ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.



**Notice :** please note that not all combinations of above numbers are available. Refer to the following pages for further information.


# AS series

Snap-in rocker switches

## SOLDER LUG TERMINALS




	III	II	I
AS36S0	ON	-	ON
AS39S0	ON	OFF	ON
AS37S0	MOM	OFF	MOM
AS38S0	ON	OFF	MOM
AS32S0	ON	-	MOM

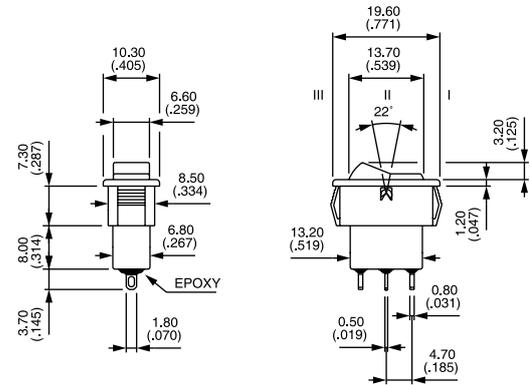

## STRAIGHT PC TERMINALS



	III	II	I
AS36P0	ON	-	ON
AS39P0	ON	OFF	ON
AS37P0	MOM	OFF	MOM
AS38P0	ON	OFF	MOM
AS32P0	ON	-	MOM

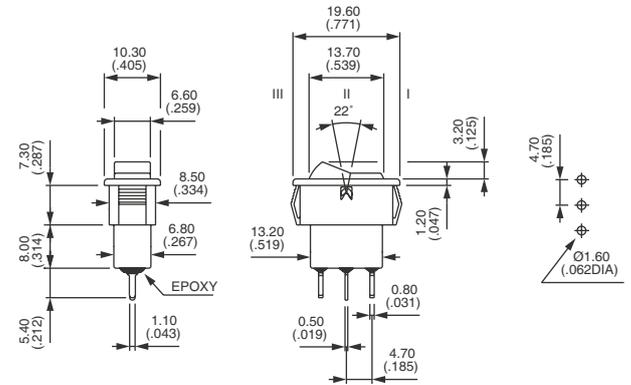

### CONTACT MATERIALS



- 0 Brass, gold plated
- 1 Silver
- 2 Silver, gold plated
- 5 Special contact, lower rating. Minimum quantity. Consult factory

### ACTUATORS



- 00 Black
- 01 Red
- 02 Grey
- 03 Blue
- 04 Ivory
- 07 White
- 09 Dark blue

For marking on actuator, consult factory.


# AS series

Snap-in rocker switches

## OTHER OPTIONS

BASIC P/N

- 10 With UL marking
- 20 10 mm (.393) long straight PC terminals



20

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rocker Switches](#) category:*

*Click to view products by [Apem](#) manufacturer:*

Other Similar products are found below :

[LTI LA6E-1S-WH-RC-FN12VXCR1](#) [6-1571986-9](#) [8007K26N324V52](#) [8055K32Z7V](#) [8055K52Z7V](#) [8138K20E6M50](#) [84206L](#) [84312LX](#)  
[PREDD5-07F-BB0GW](#) [999-16716-002](#) [999-16716-003](#) [999-16716-004](#) [A101J1V3Q004](#) [A101J2ZQ004](#) [A101J4ZQ004](#) [A101J51CB0004](#)  
[A103J1ZQ004](#) [A201J1AQ004](#) [A201J3ZB004](#) [A201J50ZQ004](#) [A203J51ZQ0004](#) [A435S1YZQ](#) [H8500XBBBBBL-A](#) [H8653VBBG2577W](#)  
[HB130CHNWWNAAC](#) [R13112ABB-602W](#) [1251.0303](#) [AE205J60V3B004](#) [1352.0107](#) [1500G51E](#) [1571099-3](#) [1571987-4](#) [1571987-5](#)  
[1571989-7](#) [1571988-5](#) [B123J77V7B2](#) [B226J50W4Q22P](#) [B433J37ZQ22M](#) [160212E](#) [1634200-7](#) [1801.1164](#) [1839.1502](#) [PANEL-PLUG-VHP-](#)  
[BLACK](#) [PANEL-PLUG-VHP-WT](#) [K1ABBSCADN](#) [K2ABAAAAAA](#) [KG312A2DXD246X](#) [250011E714](#) [2600HM11E](#) [2600R21E](#)