

HLMP-P106/P156

HLMP-Q102/Q152/Q106/Q156

Subminiature High-Performance Red LED Lamps

Description

Flat Top Package

The Broadcom® HLMP-Pxxx Series flat-top lamps use an untinted, non-diffused, truncated lens to provide a wide radiation pattern that is necessary for use in backlighting applications. The flat-top lamps are also ideal for use as emitters in light pipe applications.

Dome Packages

The HLMP-Qxxx Series dome lamps, for use as indicators, use a tinted, diffused lens to provide a wide viewing angle with high on-off contrast ratio. High-brightness lamps use an untinted, nondiffused lens to provide a high luminous intensity within a narrow radiation pattern.

Lead Configurations

All of these devices are made by encapsulating LED chips on axial lead frames to form molded epoxy subminiature lamp packages. A variety of package configuration options are available. These include special surface-mount lead configurations, gull wing, yoke lead, or Z-bend. Right-angle lead bends at 2.54 mm (0.100 in.) and 5.08 mm (0.200 in.) center spacing are available for through-hole mounting. For additional information, refer to the *Standard SMT and Through-Hole Lead Bend Options for Subminiature LED Lamps Data Sheet*.


Features

- Subminiature flat-top package
- Ideal for backlighting and light piping applications
- Subminiature dome package
 - Diffused dome for wide viewing angle
 - Non-diffused dome for high brightness
- Wide range of drive currents 500 mA to 50 mA
- Ideal for space-limited applications
- Axial leads
- Available with lead configurations for surface-mount and through-hole PC board mounting

Device Selection Guide


| Package Description | Viewing Angle $2\theta_{1/2}$ | Deep Red Rd = 630 nm | Typical Iv $I_F = 500 \mu A$ | Typical Iv $I_F = 20 mA$ | Package Outline |
|---|----------------------------------|-------------------------|---------------------------------|-----------------------------|-----------------|
| Domed, Diffused Tinted, Standard Current | 35 | HLMP-Q102 | — | — | B |
| Domed, Diffused Tinted, Low Current | 35 | HLMP-Q152 | 2 | — | B |
| Domed, Nondiffused Untinted, Standard Current | 15 | HLMP-Q106 | — | — | B |
| Domed, Nondiffused Untinted, Low Current | 15 | HLMP-Q156 | 7 | — | B |
| Flat Top, Nondiffused Untinted Standard Current | 75 | HLMP-P106 | — | — | A |
| Flat Top, Nondiffused Untinted, Low Current | 75 | HLMP-P156 | 2 | — | A |

Ordering Information

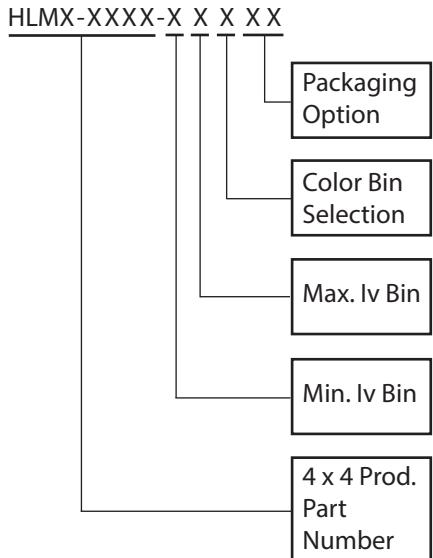


Package Dimensions

A) Flat-Top Lamps

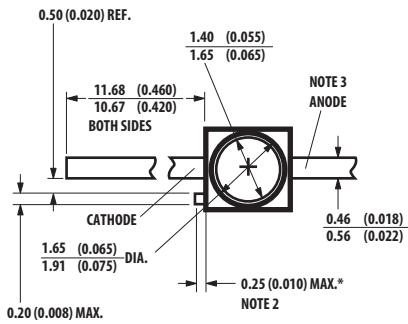

* REFER TO FIGURE 1 FOR DESIGN CONCERNS.

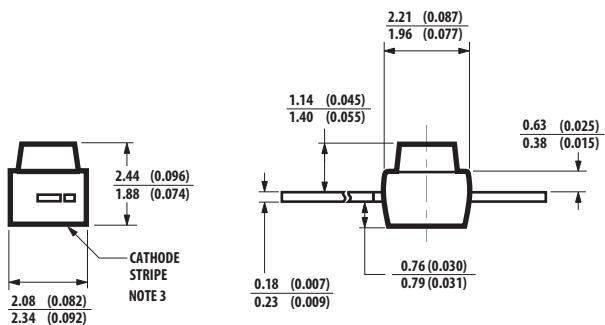

NOTE: All dimensions are in millimeters (inches).

B) Diffused and Nondiffused Dome Lamps





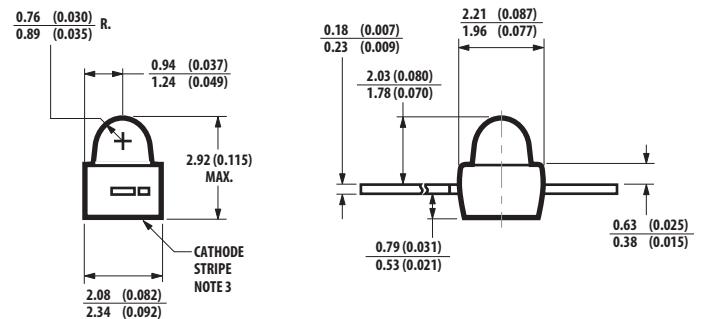


Figure 1: Proper Right-Angle Mounting to a PC Board to Prevent Protruding Cathode Tab from Shorting to Anode Connection**NOTES:**

1. ALL DIMENSIONS ARE IN MILLIMETRES (INCHES).
2. PROTRUDING SUPPORT TAB IS CONNECTED TO CATHODE LEAD.

Package Mounting

NO. ANODE DOWN.

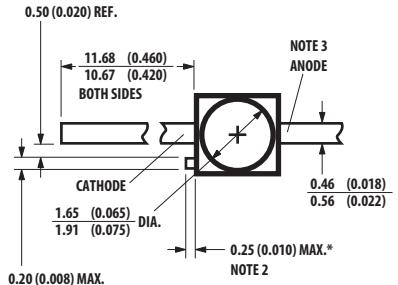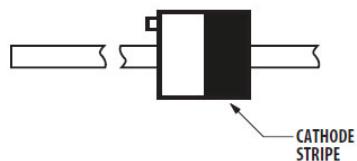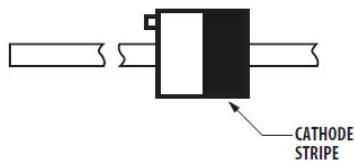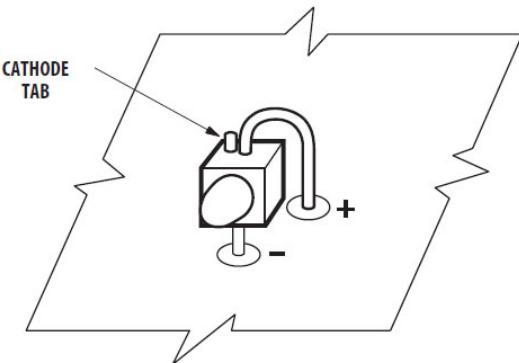

YES. CATHODE DOWN.

Proper right angle mounting to a PC board to prevent protruding cathode tab from shorting to anode connection.

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

| Parameters | Value |
|---|----------------------|
| DC Forward Current ^a | 50 mA |
| Peak Forward Current ^b | 300 mA |
| Average Forward Current ^{b, c} | 30 mA |
| Transient Forward Current (10 ms Pulse) ^d | 500 mA |
| Power Dissipation | 100 mW ^e |
| Reverse Voltage | 5V |
| Junction Temperature | 110°C |
| Operating Temperature | -55°C to +100°C |
| Storage Temperature | -55°C to +100°C |
| Lead Soldering Temperature (1.6 mm [0.063 in.] from body) | 260°C for 5 seconds |
| Reflow Soldering Temperature | 260°C for 20 seconds |

a. Derate linearly as shown in [Figure 6](#).

b. See [Figure 7](#) to establish pulsed operating conditions.

c. Maximum IAVG at $f = 1 \text{ kHz}$, DF = 10%.

d. The transient peak current is the maximum non-recurring peak current the device can withstand without damaging the LED die and wire bonds. It is not recommended that the device be operated at peak currents above the Absolute Maximum Peak Forward Current.

e. 120 mW for HLMP-P156-HK0xx and HLMP-Q106-VX0xx.

Optical Characteristics at $T_A = 25^\circ\text{C}$

| Part Number | Luminous Intensity I_v (mcd) at 20 mA ^a | | Total Flux Peak ϕ_v (mln) at 20 mA ^b | Peak Wavelength λ_{peak} (nm) | Color, Dominant Wavelength λ_d ^c (nm) | Viewing Angle $2\theta_{1/2}$ Degrees ^d | Luminous Efficacy η_v ^e (lm/w) |
|-----------------|---|------|--|---|---|--|--|
| | Min. | Typ. | Typ. | Typ. | Typ. | Typ. | |
| HLMP-Q106-R00xx | 100 | 400 | 280 | 640 | 630 | 15 | 85 |
| HLMP-Q102-N00xx | 25 | 100 | — | 640 | 630 | 35 | 85 |
| HLMP-Q106-VX0xx | 630 | — | — | 640 | 630 | 15 | — |
| HLMP-P106-Q00xx | 63 | 130 | 280 | 640 | 630 | 75 | 85 |

- a. The luminous intensity, I_v , is measured at the mechanical axis of the lamp package. The actual peak of the spatial radiation pattern may not be aligned with this axis.
- b. ϕ_v is the total luminous flux output as measured with an integrating sphere.
- c. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the device.
- d. $\theta_{1/2}$ is the off-axis angle where the liminous intensity is 1/2 the peak intensity.
- e. Radiant intensity, I_v , in watts/steradian, may be calculated from the equation $I_v = I_v/\eta_v$, where I_v is the luminous intensity in candelas and η_v is the luminous efficacy in lumens/watt.

Optical Characteristics at $T_A = 25^\circ\text{C}$

| Part Number (Low Current) | Luminous Intensity I_v (mcd) at 0.5 mA ^a | | Total Flux Peak ϕ_v (mln) at 0.5 mA ^b | Peak Wavelength λ_{peak} (nm) | Color, Dominant Wavelength λ_d ^c (nm) | Viewing Angle $2\theta_{1/2}$ Degrees ^d | Luminous Efficacy η_v ^e (lm/w) |
|------------------------------|--|------|---|---|---|--|--|
| | Min. | Typ. | Typ. | Typ. | Typ. | Typ. | |
| HLMP-Q156-H00xx | 2.5 | 7 | 10.5 | 640 | 630 | 15 | 85 |
| HLMP-Q152-G00xx | 1.6 | 2 | — | 640 | 630 | 35 | 85 |
| HLMP-P156-EG0xx | 0.63 | 2 | 10.5 | 640 | 630 | 75 | 85 |
| HLMP-P156-HK0xx | 2.5 | — | — | 640 | 630 | 75 | — |

- a. The luminous intensity, I_v , is measured at the mechanical axis of the lamp package. The actual peak of the spatial radiation pattern may not be aligned with this axis.
- b. ϕ_v is the total luminous flux output as measured with an integrating sphere.
- c. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the device.
- d. $\theta_{1/2}$ is the off-axis angle where the liminous intensity is 1/2 the peak intensity.
- e. Radiant intensity, I_v , in watts/steradian, may be calculated from the equation $I_v = I_v/\eta_v$, where I_v is the luminous intensity in candelas and η_v is the luminous efficacy in lumens/watt.

Electrical Characteristics at $T_A = 25^\circ\text{C}$

| Part Number | Forward Voltage V_F (Volts) at $I_F = 20 \text{ mA}$ | | Reverse Breakdown V_R (Volts) at $I_R = 100 \mu\text{A}$ | | Capacitance C (pF) $V_F = 0$, $f = 1 \text{ MHz}$ | Thermal Resistance $R\theta_{J-PIN} (\text{ }^\circ\text{C/W})$ | Speed of Response τ_s (ns) Time Constant e^{-t/τ_s} |
|-----------------|---|------|---|------|--|---|---|
| | Typ. | Max. | Min. | Typ. | | | |
| HLMP-Q106 | 2.0 | 2.4 | 5 | 25 | 20 | 170 | 45 |
| HLMP-Q106-VX0xx | 2.0 | 2.6 | 5 | 25 | — | 170 | — |
| HLMP-Q102 | 2.0 | 2.4 | 5 | 25 | 20 | 170 | 45 |
| HLMP-P106 | 2.0 | 2.4 | 5 | 25 | 20 | 170 | 45 |

Electrical Characteristics at $T_A = 25^\circ\text{C}$

| Part Number (Low Current) | Forward Voltage V_F (Volts) at $I_F = 0.5 \text{ mA}$ | | Reverse Breakdown V_R (Volts) at $I_R = 100 \mu\text{A}$ | | Capacitance C (pF) $V_F = 0$, $f = 1 \text{ MHz}$ | Thermal Resistance $R\theta_{J-PIN} (\text{ }^\circ\text{C/W})$ | Speed of Response τ_s (ns) Time Constant e^{-t/τ_s} |
|------------------------------|--|------|---|------|--|---|---|
| | Typ. | Max. | Min. | Typ. | | | |
| HLMP-Q156 | 1.7 | 1.9 | 5 | 25 | 20 | 170 | 45 |
| HLMP-Q152 | 1.7 | 1.9 | 5 | 25 | 20 | 170 | 45 |
| HLMP-P156 | 1.7 | 1.9 | 5 | 25 | 20 | 170 | 45 |
| HLMP-P156-HK0xx | 1.7 | 1.9 | 5 | 25 | — | 170 | — |

Figure 2: Relative Intensity vs. Wavelength

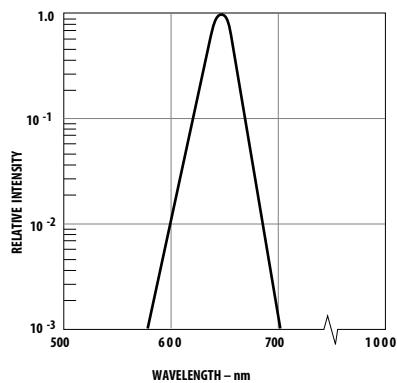


Figure 3: Forward Current vs. Forward Voltage

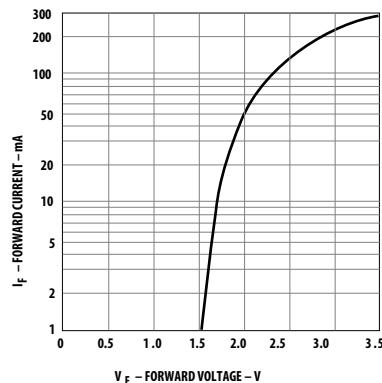


Figure 4: Relative Luminous Intensity vs. DC Forward Current

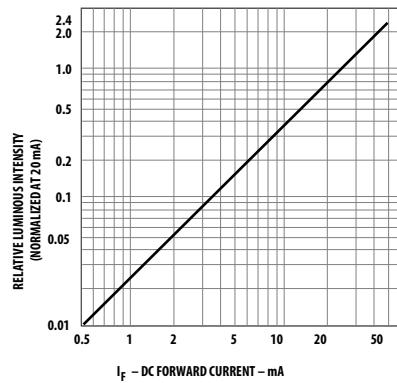


Figure 5: Relative Efficiency vs. Peak Forward Current

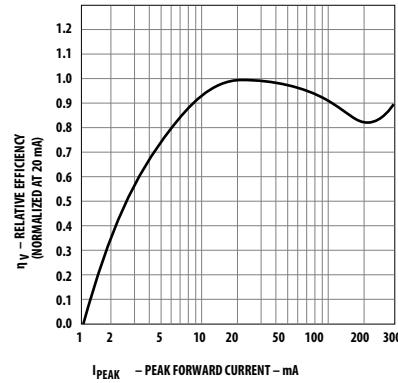


Figure 6: Maximum Forward DC Current vs. Ambient Temperature. Derating based on T_{JMAX} = 110°C.

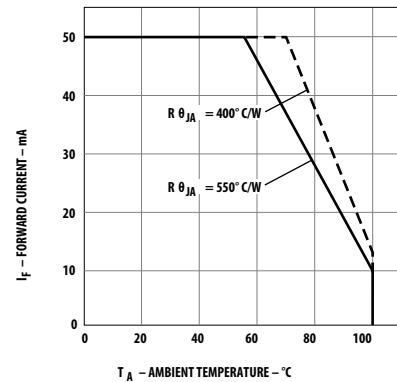


Figure 7: Maximum Average Current vs. Peak Forward Current

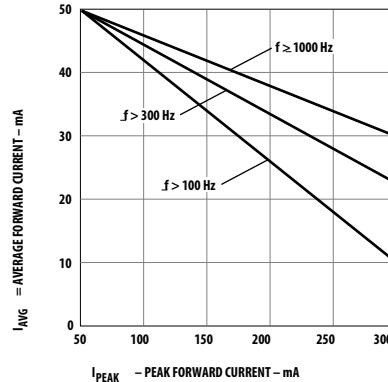


Figure 8: HLMP-Q106/-Q156

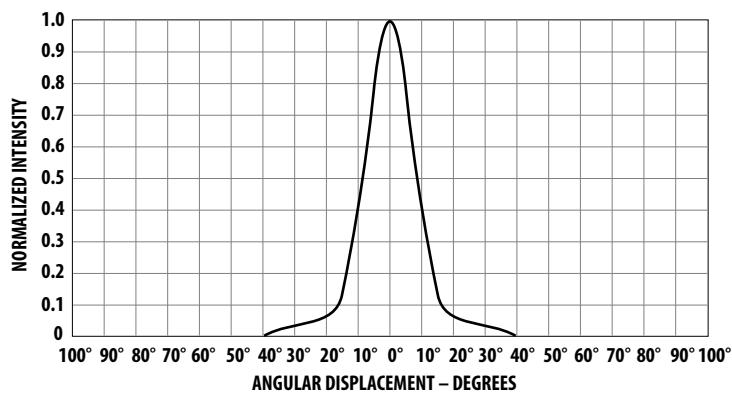


Figure 9: HLMP-Q102/-Q152


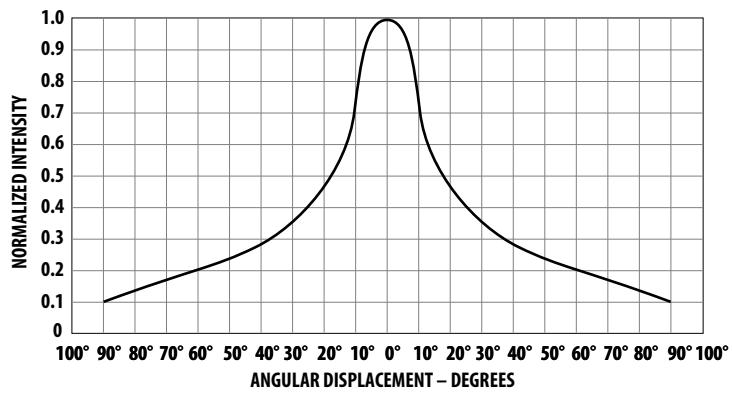


Figure 10: HLMP-P106/-P156

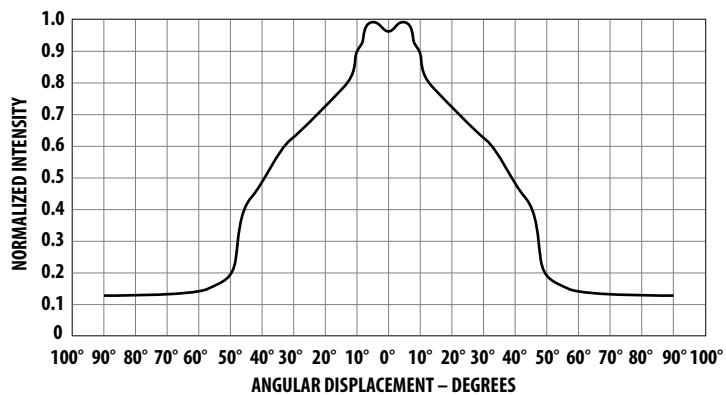

Intensity Bin Limits

| Bin | Min. | Max. |
|-----|---------|---------|
| E | 0.63 | 1.25 |
| F | 1.00 | 2.00 |
| G | 1.60 | 3.20 |
| H | 2.50 | 5.00 |
| J | 4.00 | 8.00 |
| K | 6.30 | 12.50 |
| L | 10.00 | 20.00 |
| M | 16.00 | 32.00 |
| N | 25.00 | 50.00 |
| P | 40.00 | 80.00 |
| Q | 63.00 | 125.00 |
| R | 100.00 | 200.00 |
| S | 160.00 | 320.00 |
| T | 250.00 | 500.00 |
| U | 400.00 | 800.00 |
| V | 630.00 | 1250.00 |
| W | 1000.00 | 2000.00 |
| X | 1600.00 | 3200.00 |
| Y | 2500.00 | 5000.00 |

Color Bin Limits

| Package | Bin | Min. | Max. |
|---------|-----|-------------------|------|
| Red | 0 | Full Distribution | |

Mechanical Option

| | |
|----|---|
| 00 | Straight Leads, Bulk Packaging, Quantity of 500 Parts |
| 11 | Gull Wing Leads, 12-mm Tape on 7-in. Diameter Reel, 1500 Parts per Reel |
| 12 | Gull Wing Lead, Bulk Packaging, Quantity of 500 Parts |
| 14 | Gull Wing Leads, 12-mm Tape on 13-in. Dia. Reel, 6000 Parts per Reel |
| 21 | Yoke Leads, 12-mm Tape on 7-in. Dia. Reel, 1500 Parts per Reel |
| 22 | Yoke Leads, Bulk Packaging, Quantity of 500 Parts |
| 24 | Yoke Leads, 12-mm Tape on 13-in. Dia. Reel, 6000 Parts per Reel |
| 31 | Z-Bend Leads, 12-mm Tape on 7-in. Dia. Reel, 1500 Parts per Reel |
| 32 | Z-Bend Leads, Bulk Packaging, Quantity of 500 Parts |
| 34 | Z-Bend Leads, 12-mm Tape on 13-in. Dia. Reel, 6000 Parts per Reel |

NOTE: All categories are established for classification of products. Products may not be available in all categories. Contact your local Broadcom representative for further clarification and information.



Broadcom, the pulse logo, Connecting everything, Avago Technologies, Avago, and the A logo are among the trademarks of Broadcom and/or its affiliates in the United States, certain other countries, and/or the EU.

Copyright © 2012–2018 Broadcom. All Rights Reserved.

The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, please visit www.broadcom.com.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard LEDs - SMD category:

Click to view products by Broadcom manufacturer:

Other Similar products are found below :

[LTST-C19GD2WT](#) [LTST-N683GBEW](#) [LTW-170ZDC](#) [LTW-M140SZS40](#) [598-8110-100F](#) [598-8170-100F](#) [598-8610-202F](#) [67-22VRVGC/TR8](#) [AAAF5060QBFSEEZGS](#) [HLMA-QG00-S0021](#) [HLMP-6305-L0011](#) [ALMD-LB36-SV002](#) [APT1608QGW](#) [15-21UYC/S530-A3/TR8](#) [EASV1803BA0](#) [LG M67K-H1J2-24-0-2-R18-Z](#) [LS A676-P2S1-1](#) [SML-512VWT86A](#) [SML-LX0606SISUGC/A](#) [SML-LXL1307SRC-TR](#) [SML-LXR851SIUPGUBC](#) [LT1ED53A](#) [FAT801-S](#) [AM27ZGC03](#) [APB3025SGNC](#) [APFA3010SURKCGKQBDC](#) [APHK1608VGCA](#) [APT2012QGW](#) [CLX6D-FKB-CN1R1H1BB7D3D3](#) [LTST-C250KGKT](#) [LTW-020ZDCG](#) [LTW-21TS5](#) [LTW-220DS5](#) [JANTXM19500/521-02](#) [UYGT801-S](#) [42-21UYC/S530-A3/TR8](#) [LO T67F-V1AB-24-1](#) [YGFR411-H](#) [SML-LX0402IC-TR](#) [CMDA20AYAA7D1S](#) [CMDA16AYDR7A1X](#) [339-1SURSYGW/S530-A2](#) [598-8040-100F](#) [598-8070-100F](#) [598-8140-100F](#) [598-8610-200F](#) [EAPL3527GA5](#) [SML-LXL1209SYC/ATR](#) [EASV3020YGA0](#) [EAST16086YA5](#)