



1. Designed for long haul Gigabit Ethernet 1000 Base-T, full duplex applications.
2. Supports four pairs of category 5 UTP cable.
3. Cable interface for isolation and low common mode emissions
4. Compliant with IEEE 802.3ab standard for 1000 Base-T
5. Designed to support 1:1 Turns Ratio Transceivers.
6. Operating Temperature range: 0°C TO +70°C
7. Storage temperature range: -25°C TO +125°C

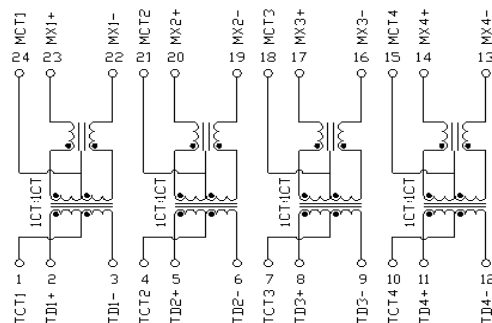

DIMENSIONS & SCHEMATICS




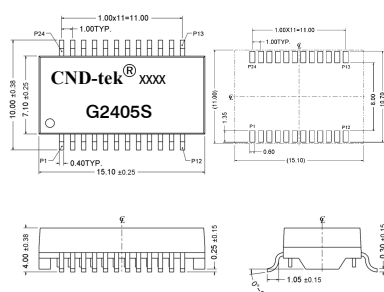


Note: 1、Dimension: mm, 2.Unless otherwise specified,tolerances are: $\pm 0.15\text{mm}$

TECHNICAL SPECIFICATIONS

OCL :	350 μ H Min. @ 100 KHz, 100mV with 8mA DC Bias
Leakage	0.5 μ H Max. @ 100KHz, 0.1V
Inductance: Cw/w:	28pF Max. @ 100KHz, 0.1V
DCR:	1.20 Ω Max.
Turns Ratio($\pm$ 5%):	1CT:1CT
Polarity:	2-23, 5-20, 8-17, 11-14 In-Phase
Insertion Loss:	-1.0dB Max. @ 1-100MHz
Return Loss:	-16dB Min. @ 1-30MHz -12 dB Min. @ 30-60 MHz -10 dB Min.@ 60-80 MHz
Cross Talk:	-40 dB Min.@ 1-60 MHz -32 dB Min.@ 60-100 MHz
Common Mode Rejection :	-38 dB Min.@ 1-30 MHz -33 dB Min.@ 60 MHz -30 dB Min.@ 80-100 MHz
Isolation HI-POT:	1500Vrms 1mA 1Second

PACKING SPECIFICATION



1. units/reel:800PCS
2. reel/carton:5PCS
3. units/carton :4000PCS

EXPORT CARTON:367(L)x337(W)x235(H)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [CND-tek](#) manufacturer:

Other Similar products are found below :

[10306230004](#) [103062300040](#) [103062300055](#) [10306230033H](#) [10306230038H](#) [10306230041H](#) [10306230046DH](#) [10306230047](#)
[10306230049H](#) [10306230056](#) [10306230069](#) [10306230083H](#) [10306230154H](#) [10306230178](#) [10306230181](#) [10306230223DH](#) [10306230241D](#)
[10306230242DH](#) [10306230353](#) [103064000045](#) [10306400046](#) [10306400053H](#) [10306400058](#) [10CLD106415MH](#) [10CLD106520MH](#)
[20306230262](#) [303062300049](#) [30306230035D](#) [A102N3200200N](#) [AE71A2000010](#) [AE71A4100010](#) [AE71K4000010](#) [AE90A2104405](#)
[AE90A4004105](#) [AE90K1104000](#) [AE90K2104005](#) [AE90K4104105](#) [B1201D](#) [B1202D](#) [B1203D](#) [B16011S](#) [B1601S](#) [B1603S](#) [B1605S](#) [B1608S](#)
[B1617S](#) [B2009D](#) [B2018D](#) [B4001S](#) [B4004S](#)