

SOLENOID PRODUCT SPECIFICATION


PART No.	VOLTAGE	DUTY CYCLE	POWER (W)	CURRENT (A)	DCR (Ω) *
DSTL-0840-24	24 VDC	100%	7.4	0.31	77.4
DSTL-0840-18	18 VDC	100%	7.2	0.4	45
DSTL-0840-12	12 VDC	100%	7.6	0.63	19
DSTL-0840-09	9.4 VDC	100%	7.0	0.75	12.5
DSTL-0840-05	5 VDC	100%	7.6	1.52	3.3

* OPERATION: POWER TO PULL

* DCR VALUES ARE $\pm 10\%$ AT 25°C

* WEIGHT ARE 96 GRAMS $\pm 10\%$

1. MECHANICAL DIMENSIONS :

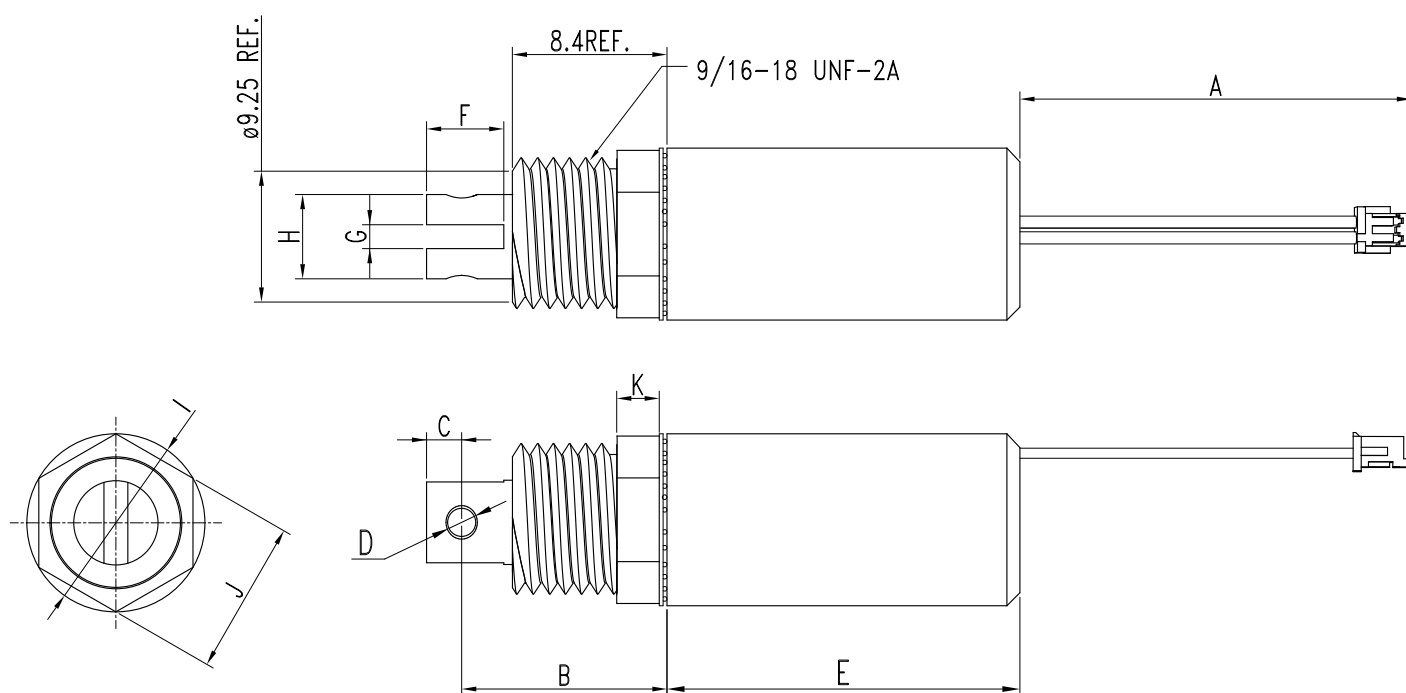

Connector : TYCO
HOUSING : AMP 179228-2
CONTACT PIN : AMP 179227-1
CABLE : AWG 24 UL 1007

UNIT : mm.

A = 100 ± 10

B = 19.05 ± 0.5

C = 4.76 ± 0.25

D = 2.4 ± 0.05

E = 40.0 MAX.

F = 9.52 ± 0.3


G = 2.5 ± 0.3

H = $\phi 7.82 \pm 0.1$

I = 19.6 MAX.

J = 17.50 REF.

K = 3.30 ± 0.25

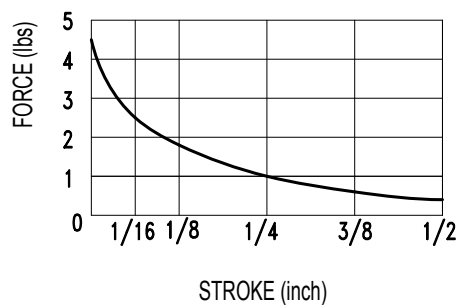

INSULATION MATERIALS: UL CONSTRUCTION, CLASS B 130°C
LIFE EXPECTANCY: 100K CYCLES OPERATIONS

LAYER TEST	IR. @500 Vdc.	HI-POT
(S-F) : 2KVp. MIN.	COIL TO CASE	@50/60Hz., 2mA
TEST ONLY COIL	30 MOHM MIN.	COIL TO CASE
		1000Vac., 60s

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solenoids & Actuators](#) category:

Click to view products by [Delta](#) manufacturer:

Other Similar products are found below :

[7014-S](#) [11-C-6D](#) [11-I-24A](#) [A-1223](#) [11P-C-6D](#) [H-15234-029-20](#) [A420-065512-00](#) [A420-065513-00](#) [A420-065570-00](#) [A420-065710-00](#)
[A420-066011-00](#) [A420-066947-00](#) [A420-067877-00](#) [A420-067899-00](#) [A420-068516-00](#) [A421-062507-11](#) [A421-062507-12](#) [A490-367460-13](#)
[A490-367460-15](#) [A490-367461-02](#) [A490-367462-07](#) [1251-A-1](#) [D4HD-24VDC-PULL-CONT](#) [12-C-120A](#) [12-I-120A](#) [129409-031](#) [143-B1A2](#)
[1501-M-1](#) [152099-230](#) [15-516-502](#) [B20-501-A-1](#) [B20-753-A-1](#) [B24-253-A-1](#) [B24-501-A-1](#) [B24-753-A-1](#) [B27-501-A-1](#) [195931-028](#) [C15-](#)
[519-A-14](#) [C33-19-M-33](#) [C8-273-M-36](#) [2-1617079-7](#) [24-I-24D](#) [280-592](#) [2-I-12D](#) [3001-M-1](#) [A-1319](#) [A420-062658-06](#) [A420-065825-00](#)
[A420-066052-00](#) [A490-367460-05](#)