



Cixi Dibo Electronics Co.,LTD

产品规格书
product specification

电气性能/Electrical

参考标准/Standard:	UL	IEC
----------------	----	-----

额定电压/Rated voltage: 300V 250V

额定电流/Rated current:	8A	10A
---------------------	----	-----

接觸電阻/Contact resistance: 20m Ω

使用线径/Wire range: 28-16AWG 1.5mm²

耐电压/Withstanding voltage: AC2000V/1Min

绝缘电阻/Insulation resistance: 500M Ω /DC500V

机械性能/Mechanical

温度范围/Temp.Range: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$

扭 矩/Torque: 0.2Nm(1.71lb`in)

剥线长度/Strip length: 6-7 mm

尺寸/Dimensions

间距/Pitch: 3.81mm/3.5mm

极数/Poles: 2P-24P




材质及电镀/ Material

塑件/Housing: PA66, UL94V-0

螺丝/Screws: M2, steel Zinc plated

方块/Wire guard: Brass, Ni plated

夹子/Clamp: Phosphor bronze, Ni plated

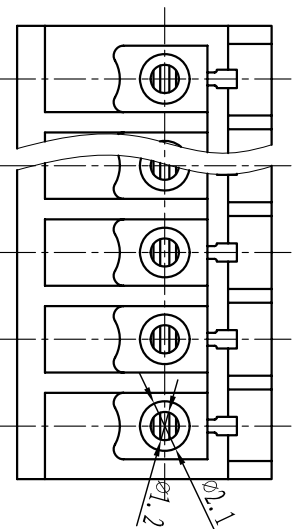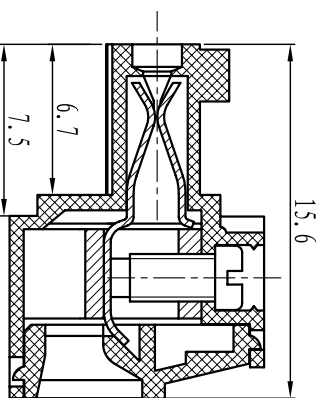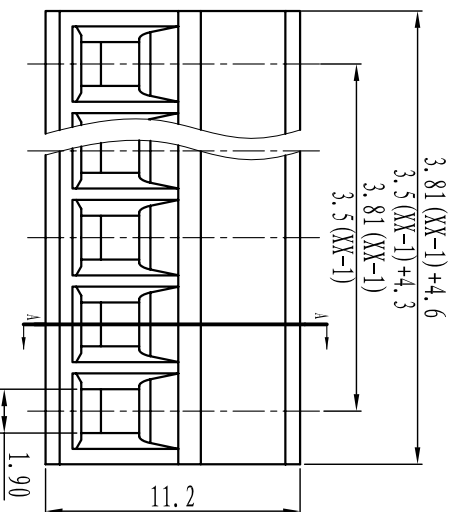

SECTION A-A

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chanfer	$\angle$	short angle sid	$\equiv$	—	$\square$	//	$\perp$
variable range	over	over	over	over		over	over	over	over	over	over	over	over
to	6	30	120	480		6	10	50	120	5	30	120	120
to	to	to	to	to	all	to	to	to	to	to	to	to	to
to	30	120	480		6	to	10	50	120	all	to	to	to
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	± 1	1°	$30'$	$20'$	$10'$	0.5
										0.025	0.06	0.12	0.4

订购方式： HOW TO ORDER

	-		P	-		-	
型号/Model		规格/SPEC		备注/Remark		客户需求/Customer Request	

灰色/Grey	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	橙色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

單位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	
----------	----	---------	----	----------	--

Cixi Dibo Electronics Co., LTD

名称/NAME	DB2EK-3.81/3.5
---------	----------------



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [DIBO](#) manufacturer:

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1729386](#) [1734692](#) [1734795](#) [1736036](#)