


Chip Type Standard Capacitors (height:5.5mm) Series RV2

- Compatible with surface mounting for 5.5mm high capacitors.
- Supplied with carrier taping.
- Guarantees 2000 hours at 85°C.




Marking color : Black print

Specifications

Item	Performance														
Category temperature range (°C)	-40 to +85														
Tolerance at rated capacitance (%)	±20														
Leakage current (μA)	Less than 0.01CV or 3 whichever is larger(after 2 minutes) C: Rated capacitance(μF); V: Rated voltage(V)														
Tangent of loss angle (tanδ)	Rated voltage (V)	4	6.3	10	16	25	35	50							
	tanδ (max.)	ø 3	0.42	0.30	0.24	0.22	0.16	0.14							
		ø 4 to ø 6.3	0.42	0.28	0.24	0.20	0.14	0.10							
								(20°C,120Hz)							
Characteristics at high and low temperature	Rated voltage (V)	4	6.3	10	16	25	35	50							
	Impedance ratio (max.)	ø 3 ø 4 to ø 6.3	Z-25°C / Z+20°C Z-40°C / Z+20°C	7 17	4 10	3 8	2 6	2 4							
			Z-25°C / Z+20°C Z-40°C / Z+20°C	7 15	3 8	2 5	2 4	2 3							
								(120Hz)							
Endurance (85°C) (Applied ripple current)	Test time	2000 hours (ø 3:1000 hours)													
	Leakage current	The initial specified value or less													
	Percentage of capacitance change	Within ±20% of initial value (4WV: ±30%)													
	Tangent of the loss angle	200% or less of the initial specified value (4WV: 300%)													
Shelf life (85°C)	Test time : 1000 hours; other items are the same as those for the endurance. Voltage application treatment : According to JIS C5101-1														
Applicable standards	JIS C5101-1, -18 1998 (IEC 60384-1 1992, -18 1993)														

Outline Drawing

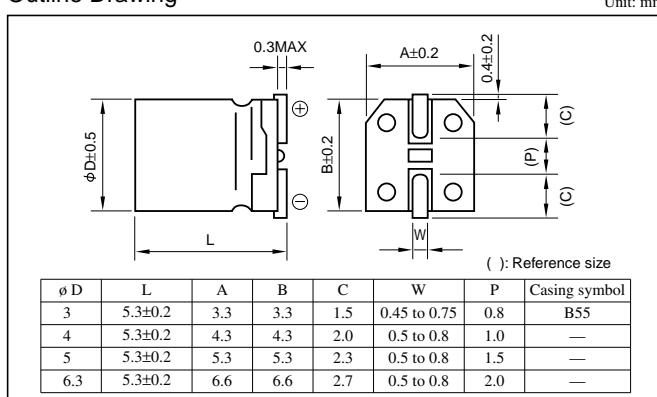

- Soldering conditions and land size are described on page 14.
The taping specifications are described on page 15.

Standard Ratings

Rated voltage (V)	4				6.3				10				16				25				35				50					
	Rated capacitance (μF)	Item	Case	Casing symbol	ESR	Rated ripple current	Case	Casing symbol	ESR	Rated ripple current	Case	Casing symbol	ESR	Rated ripple current	Case	Casing symbol	ESR	Rated ripple current	Case	Casing symbol	ESR	Rated ripple current	Case	Casing symbol	ESR	Rated ripple current	Case	Casing symbol	ESR	Rated ripple current
			ø D(mm)	ø D(mm)	Ω	m Arms	ø D(mm)	ø D(mm)	Ω	m Arms	ø D(mm)	ø D(mm)	Ω	m Arms	ø D(mm)	ø D(mm)	Ω	m Arms	ø D(mm)	ø D(mm)	Ω	m Arms	ø D(mm)	ø D(mm)	Ω	m Arms				
0.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3	B55	1990	1		
0.22	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	—	1660	3		
0.33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3	B55	905	2		
0.47	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	—	754	5		
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3	B55	603	3		
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	—	503	6		
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3	B55	424	4		
4.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	—	353	7		
10	—	—	—	—	—	—	—	—	4	—	40	23	3	B55	57	11	4	—	42	20	5	—	35	26	—	—	—	—		
22	3	B55	32	14	4	—	21	31	5	—	18	39	5	—	15	44	6.3	—	11	55	6.3	—	9.1	59	—	—	—	—		
33	4	—	21	31	5	—	14	44	5	—	12	48	6.3	—	10	63	6.3	—	7.0	67	—	—	—	—	—	—	—	—		
47	4	—	15	37	5	—	10	52	6.3	—	8.5	67	6.3	—	7.1	75	—	—	—	—	—	—	—	—	—	—	—	—		
100	5	—	7.0	63	6.3	—	5.0	89	6.3	—	4.0	98	6.3	—	3.3	103	—	—	—	—	—	—	—	—	—	—	—	—		
220	6.3	—	3.2	110	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		

(Note) Rated ripple current : 85°C, 120Hz ; ESR : 20°C, 120Hz

NOTE

Design, Specifications are subject to change without notice.
Ask factory for technical specifications before purchase and/or use.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:

Click to view products by Elna manufacturer:

Other Similar products are found below :

[EEV-FK1E332W](#) [MAL214099897E3](#) [22927](#) [MAL214099813E3](#) [NRWA331M63V12.5X20TBF](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#) [107AXZ016MQ5](#) [UCX1E102MNQ1MS](#) [EMF1EM101E83D00R](#) [EMK1AM221E83D00R](#) [EMK1EM471GB0D00R](#) [EMK1VM101E83D00R](#) [EMVY350ARA221MHA0G](#) [UV2G3R3M0810VG](#) [EMK1VM101FB0D00R](#) [RVT2A4R7M0605](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#) [MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [HV100M100E077ETR](#) [MAL214099111E3](#) [EXV107M025A9HAA](#) [50SEV1M4X5.5](#) [TYEH1A336E55MTR](#) [TYEH1V106E55MTR](#) [UCX1H471MNQ1MS](#) [35SGV220M10X10.5](#) [35SLV10M5X6.1](#) [VEJ220M1VTR-0606](#) [VES2R2M1HTR-0405](#) [50SEV10M6.3X5.5](#) [50SGV1M4X6.1](#) [107SML016M](#) [EDK226M035A9DAA](#) [EEV-HA1A471UP](#) [UCX1H471MNS1MS](#) [VZH331M1ETR-0810](#) [VES101M1CTR-0605](#) [TYEH1H475E55MTR](#) [6.3SEV22M4X5.5](#) [6.3SEV47M4X5.5](#) [EEVEB2V4R7Q](#) [EEEFK1A681GP](#)