

	EXCEL CELL ELECTRONIC CO., LTD.	NO.	A30877		
SPECIFICATION		Edition	6	Page	1

EDG/S SERIES DIP SWITCH

1. FEATURES:

- 1-1 Tactile response is performed directly by larger contact pressure to ensure very stable contact
- 1-2 UL 94V-0 grade fire retardant engineering plastic
- 1-3 Bottom epoxy sealed standard to ensure free of flux immersion during wave soldering
- 1-4 Contact wiping on make and break
- 1-5 Gold plated and Tin plated contact to ensure low contact resistance and long mechanical life
- 1-6 Ideal for data processing, communications, remote controls and burglar alarm system use, where manual programming is required
- 1-7 RoHS Compliant

2. SPECIFICATIONS

2-1 ELECTRICAL

- | | |
|---|-----------------------------|
| 2-1-1 Contact rating | |
| switching | 25 mA, 24 VDC |
| non-Switching | 100 mA |
| 2-1-2 Contact resistance | |
| Initial | 50 mΩ Max. |
| after life test | 100 mΩ Max. |
| 2-1-3 Insulation resistance | 1,000 MΩ Min. at 100 VDC |
| 2-1-4 Dielectric strength | 500 VDC Min. for 60 seconds |
| 2-1-5 Capacitance between adjacent switches | 5 pF Max. |

2-2 MECHANICAL AND ENVIRONMENTAL

- | | |
|------------------------------------|--|
| 2-2-1 Temperature rating | |
| operating | -40°C to + 85°C |
| storage | -40°C to + 85°C |
| 2-2-2 Operation force | 800g Max. (SPST only) |
| 2-2-3 Mechanical life | 2,000 operations |
| 2-2-4 Humidity | 95% RH, 40°C for 96 Hrs. |
| 2-2-5 Vibration | 10Hz-55Hz-10Hz for 6 Hrs. |
| 2-2-6 Solderability | After flux 230±5°C for
5±0.5 seconds 95% coverage |
| 2-2-7 Resistance to soldering heat | 260±5°C for 5±1 seconds |


3. OPTIONS:

- 3-1 Special top or side marking available
- 3-2 Low profile actuator
- 3-3 Low profile actuator plus top tape sealed

	EXCEL CELL ELECTRONIC CO., LTD.	NO.	A30877		
SPECIFICATION		Edition	6	Page	2

4. PART NUMBERING SYSTEM:

EDG 1 01 S 61

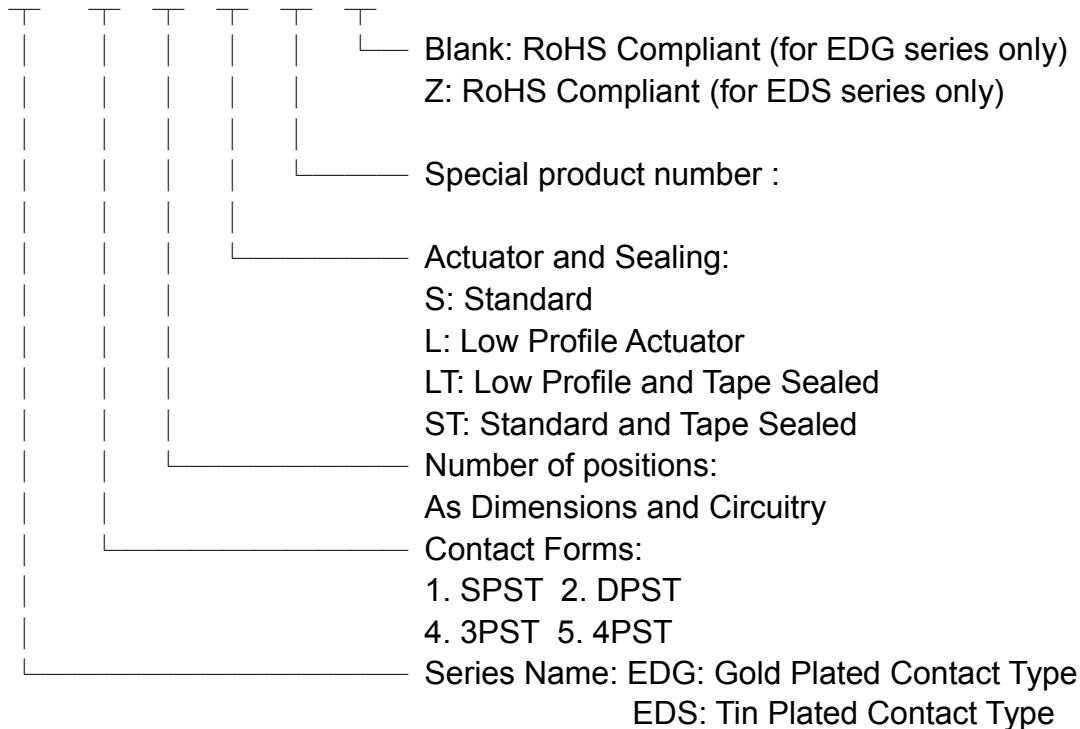

5. PACKING:

5.1 PACKING METHOD

All switches are packed into IC tubes as an inner packing unit, then ten tubes are bundles together with rubber bands.

Length of IC tube: 560 mm (EDG/S 1 pole only: 280 mm)

5.2 INFORMATION ON LABEL (stuck to each bundle of IC tubes)

- | | |
|-----------------|------------------------|
| (1) DESCRIPTION | (6) WARNING |
| (2) LOT NO. | (7) QC STAMP |
| (3) QUANTITY | (8) DATE |
| (4) TESTER NO. | (9) MANUFACTURERS NAME |
| (5) ECE MARK | |

6. DRAWINGS:

Dip switch dimensions: see attached drawing

Circuit diagram: see attached drawing

P.C.B. layout diagram: see attached drawing




7. WARNING:

Please keep contacts in OFF position during wave soldering.




EDG101S61 SPST 1POLE DIMENSIONS


Unit:mm(inch)

P.C.B LAY OUT



CONSTRUCTION

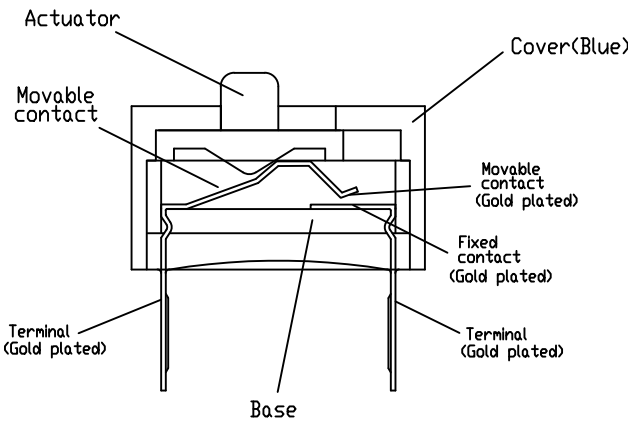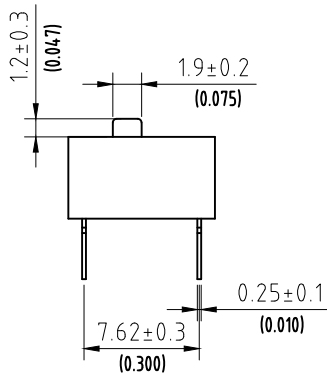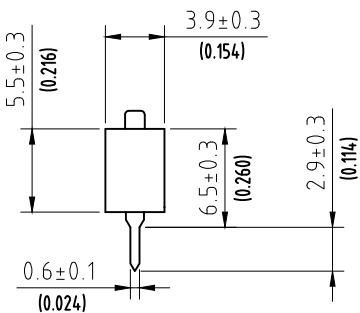

				NORMAL TOLERANCE		 EXCEL CELL ELECTRONIC CO., LTD.						PART NUMBER		EDG101S61	
				RANGE	TOLERANCE							UNIT		MM (INCH)	PART NAME
				0-1	±0.1	CHECK	Gary (2023.08.31)	DESIGN	Marcus	DRAWN	Ray (2023.08.31)	SCALE	2 : 1	TYPE	SPST-A
				1-4	±0.3							SIZE	A4	FILE NAME	7041011161A.dwg
				4-16	±0.5							PROJECTION		EDITION	A
				16-63	±0.8										
				63-250	±1.0										
				X.	±5°										
				X.X	±2.5°										
NO.	DETAILS	ALTERED BY	DATE												

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIP Switches/SIP Switches](#) category:

Click to view products by [Excel Cell Electronic\(ECE\)](#) manufacturer:

Other Similar products are found below :

[79B10T](#) [8136-475G4T](#) [193005MS](#) [200183](#) [206002](#) [208004](#) [208007ST](#) [208008](#) [208012ST](#) [25.350.0653.0](#) [SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE12S04](#) [206005RAS](#) [206007](#) [209005LPST](#) [2-1825058-8](#) [219002LPST](#) [219002MSTJRF](#) [219012MST](#) [25.352.0353.0](#) [CXDRIVEV2X](#) [LA2-002-DC24](#) [DSR02T](#) [193004MS](#) [E2FMX2D1M1TGJ03M](#) [NDI10H](#) [219008LPSTR](#) [206010RAST](#) [76SB05](#) [TD06H0SK1](#) [Z7.255.9027.0](#) [1-1825058-3](#) [1825428-4](#) [E3ZG6111D03M](#) [G4D212PUSTV2DC5](#) [HARW0002](#) [NDI10S](#) [EPG301BT06](#) [1-1825058-6](#) [E3TSL23M5J03M](#) [HARW0001](#) [ADE07S04](#) [206005](#) [206006](#) [206010](#) [208002](#) [204006ST](#)