




RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

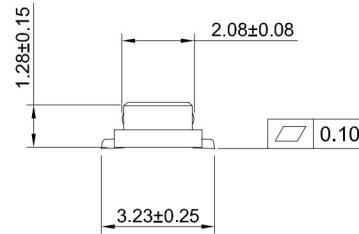


MATING HEIGHT	PLUG (H.mm)	SOCKET (H.mm)
1.5	1.28	1.35
2.0	1.28	1.85
2.5	1.28	2.35



G-Switch Specification:

- 1.Current rated: 0.5A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 40mΩ Max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 0.12kgf/Pin min
- 8.Operating temperature range: -40°C ~ +105°C

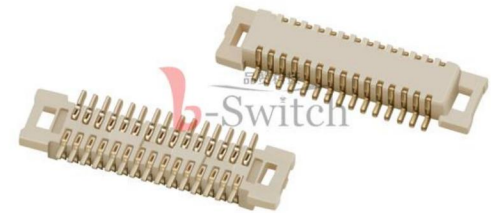

GT-B0504 M S V 12 -XX X XX 01

G-Switch

Series No

M-Male

Termipoint
S-SMT

Angle
V-180°

Terminal Plating
11-ALL G/F

Housing Colour
S-Nature

Pin Q' PY
10~80

Height
12-1.28mm

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
10	5.50	3.40	2.00	46	14.50	12.40	11.00
12	6.00	3.90	2.50	48	15.00	12.90	11.50
14	6.50	4.40	3.00	50	15.50	13.40	12.00
16	7.00	4.90	3.50	52	16.00	13.90	12.50
18	7.50	5.40	4.00	54	16.50	14.40	13.00
20	8.00	5.90	4.50	56	17.00	14.90	13.50
22	8.50	6.40	5.00	58	17.50	15.40	14.00
24	9.00	6.90	5.50	60	18.00	15.90	14.50
26	9.50	7.40	6.00	62	18.50	16.40	15.00
28	10.00	7.90	6.50	64	19.00	16.90	15.50
30	10.50	8.40	7.00	66	19.50	17.40	16.00
32	11.00	8.90	7.50	68	20.00	17.90	16.50
34	11.50	9.40	8.00	70	20.50	18.40	17.00
36	12.00	9.90	8.50	72	21.00	18.90	17.50
38	12.50	10.40	9.00	74	21.50	19.40	18.00
40	13.00	10.90	9.50	76	22.00	19.90	18.50
42	13.50	11.40	10.00	78	22.50	20.40	19.00
44	14.00	11.90	10.50	80	23.00	20.90	19.50

SCALE: 1:1 UNIT: mm
SIZE: A4

Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X° ±5°
X.x° ±3°

Title: BTB 0.50mm Pitch 180° Dual Rows
SMT Type Mate Connector

Molde Code: GT-B0504MSV12-XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2022.12.28



REV: A0 SHEET: 1/1

NO.	PART NAME	MATERIAL	REMARK
2	CONTACT	PHOSPHOR BRONZE	ALL G/F
1	HOUSING	LCP,94V-0	NATURE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) ***category:***

Click to view products by [G-Switch](#) ***manufacturer:***

Other Similar products are found below :

[589158040000018](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-330](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [55323-1519](#) [0716612340](#) [101A10019X](#) [105061100000861+](#) [75140-7012](#) [87471-650](#) [1744382-4](#) [063209](#) [LST-110-07-T-D](#) [68685-603](#) [8-1616154-3](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-214J100-G/0](#) [P50-028-DDS-TG](#) [53309-2471](#) [1586617-1](#) [504248-1210](#) [NDS100-004-BF](#) [91922-31141LF](#) [505274-3440](#) [501493-2410](#) [504208-3410](#) [505006-0811](#) [505274-2040](#) [202436-1600](#) [202477-0414](#) [71607-302ALF](#) [71660-7580](#) [73420-5192](#) [ESMC-M-80-SGR-SMT-T/R](#) [AC01S050WA1R500](#) [IL-WX-20SB-VF-B-E1000E](#) [354949](#) [1104021](#) [BK13C06-32DP/2-0.35V\(865\)](#) [ACC-140-0722-00](#) [BK13C06-40DS/2-0.35V\(865\)](#) [3511216BMSS0BNA1](#) [BB51-84AT-1-3HB](#) [BA41-40CT-1-NHB](#) [BA41-80CT-0-NHB](#) [20-AH20S-16B00-001](#)