

M23 19 Male -solder (termination)

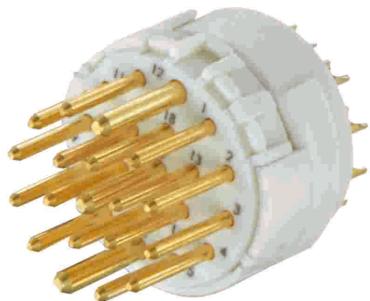


Image is for illustration purposes only. Please refer to product description.

Identification

Category	Inserts
Series	Circular connectors M23
Identification	Signal
Element	Inserts

Version

Termination method	Solder termination
Gender	Male
Number of contacts	19
Number of signal contacts	16
Number of special contacts	3
Specification of special contacts	Auxiliary contact

Technical characteristics

Conductor cross-section	1 mm ² max.
Rated current (signal)	8 A
Rated voltage (signal)	100 V
Rated impulse voltage (signal)	1.5 kV
Pollution degree (signal)	3
Rated current (special contact)	10 A
Rated voltage (special contact)	100 V
Rated impulse voltage (special contact)	1.5 kV
Pollution degree (special contact)	3

Technical characteristics

Insulation resistance	>10 ⁶ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500

Material properties

Material (insert)	Polyamide (PA)
Colour (insert)	White
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	052d6da0-30ef-44e8-bbe4-e75780521d22
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead

Specifications and approvals

UL / CSA	UL 1977 ECBT2.E235076
----------	-----------------------

Commercial data

Packaging size	5
Net weight	7.66 g
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27440223 Contact insert for circular connectors

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Metric Connectors category:

Click to view products by HARTING manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1R3006A20M005](#) [41-40011](#) [42-00006](#)
[42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#)
[XS3P-M421-2](#) [600X518050X](#) [8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-16213](#) [43-01338](#) [XS2RD4265](#) [XS2R-D426-1](#) [XS8A-0441](#) [859RD04-103R004](#) [860RD04-113R004](#) [860RD04-213R004](#) [1-213245-2](#)