

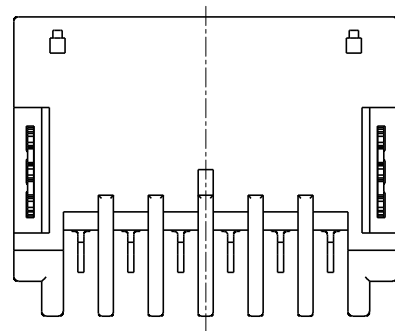
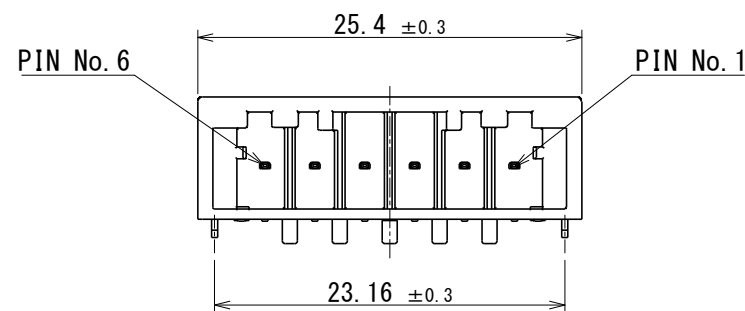


Aug.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

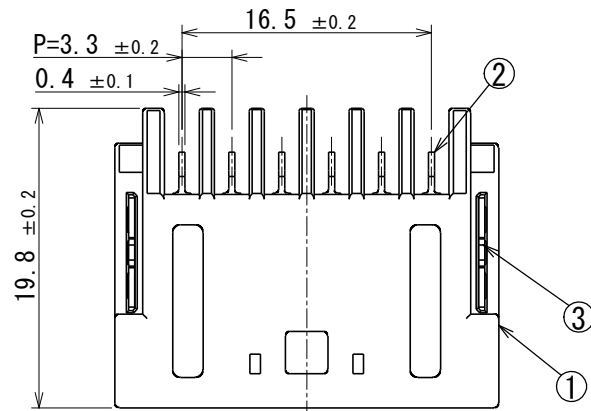


MATED CONNECTOR

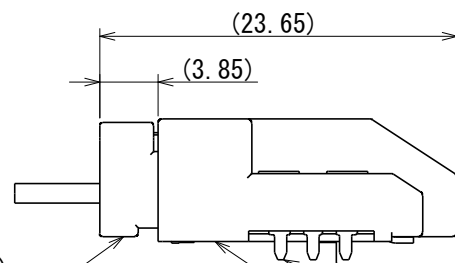


ZG05HV-6S-HU (A)
CABLE ASSEMBLY

Metal fitting

ZG05HV-6P-3.3H (A)

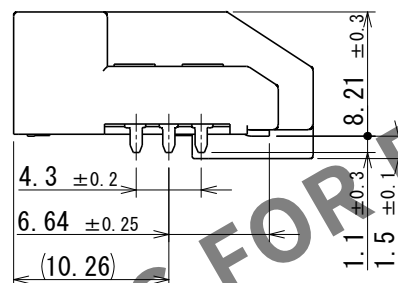

RECOMMENDED PCB PATTERN (FREE)
(PCB THICKNESS: t=1.6mm, METAL MASK THICKNESS: t=0.15mm)

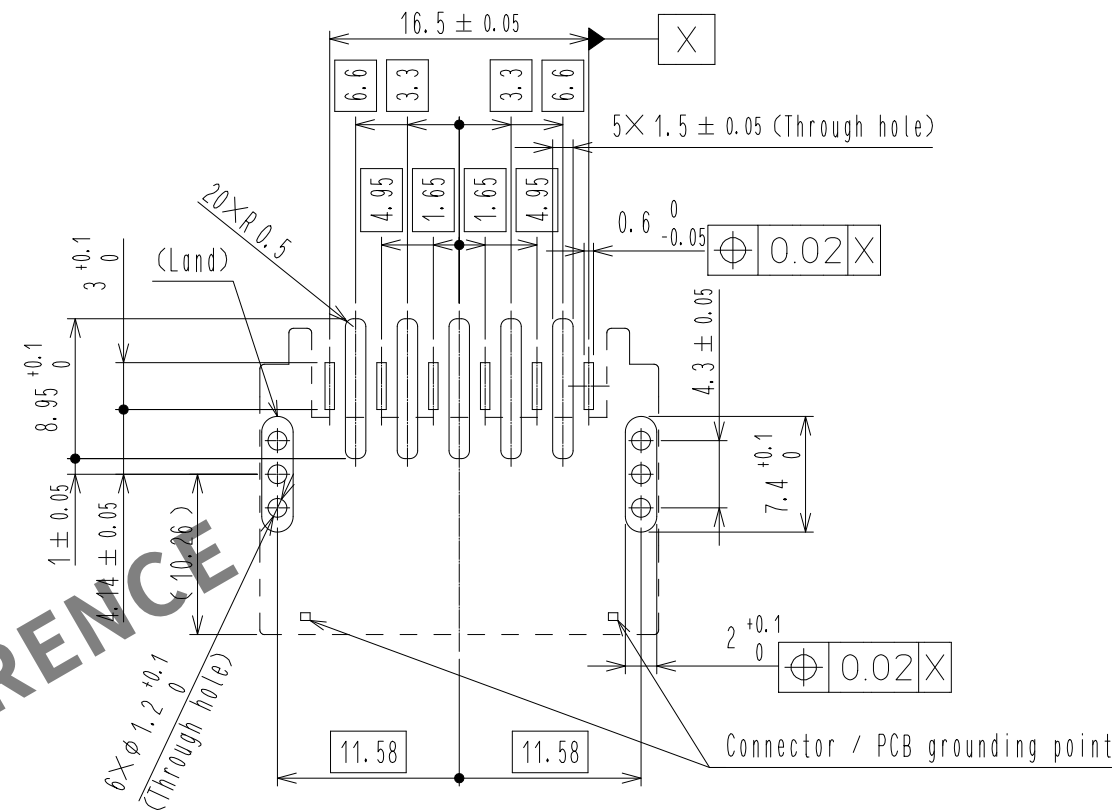

NOTE 1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW
(REFER TO RIGHT FIG.)
USED REFLOW SYSTEM


IR IN THE AIR OR NITROGEN
NO. OF CYCLES : 2 MAX
PEAK : 250°C
OVER 230°C : 20~40s
PREHEAT : 150~180°C
90~120s

2. TEMPERATURE FOR SOLDERING IRON
:280~300°C WITHIN 2s

3. CO-PLANARITY SHALL BE 0.1mm MAX.

4. RECOMMENDED PCB THICKNESS IS 1.6mm.
FOR PCB WITH A THICKNESS OF 1.6 OR GREATER,
THERE IS NO PROTRUS CONNECTOR ON THE UNDERSIDE OF THE BOARD.
WHEN USING PCB WITH A THICKNESS OF LESS THAN 1.6,
THE CONNECTOR PROTRUDES BELOW THE PCB.

5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.

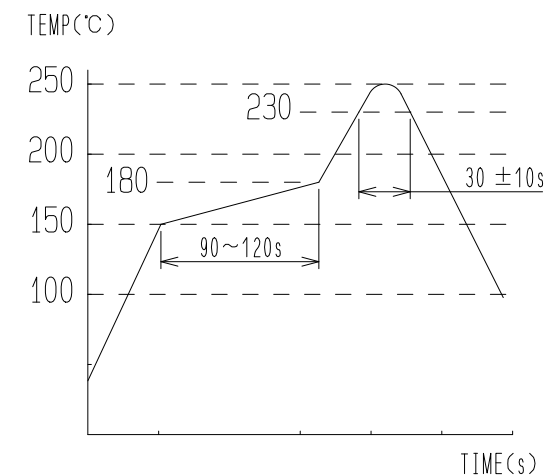


2	BRASS	SURFACE : TIN PLATING 1μm min	3	BRASS	SURFACE : TIN PLATING 1μm min
2	BRASS	UNDER : NICKEL PLATING 1μm min	3	BRASS	UNDER : NICKEL PLATING 1μm min
1	PA	ORANGE UL94V-0	3	BRASS	UNDER : NICKEL PLATING 1μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2:1	COUNT 2/3	DESCRIPTION OF REVISIONS DIS-T-00019459	DESIGNED YANG CHUANXING
		APPROVED : MASAHIRO SHOUJI	20230714	DRAWING NO.	EDC-404060-00-00
		CHECKED : MASAHIRO SHOUJI	20230714	PART NO.	ZG05HV-6P-3.3H (A)
		DESIGNED : YANG CHUANXING	20230714	CODE NO.	CL0754-2113-0-00
		DRAWN : YANG CHUANXING	20230714		
					DATE 20231102


Aug.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKING STYLE

REEL DIMENSION(FREE)

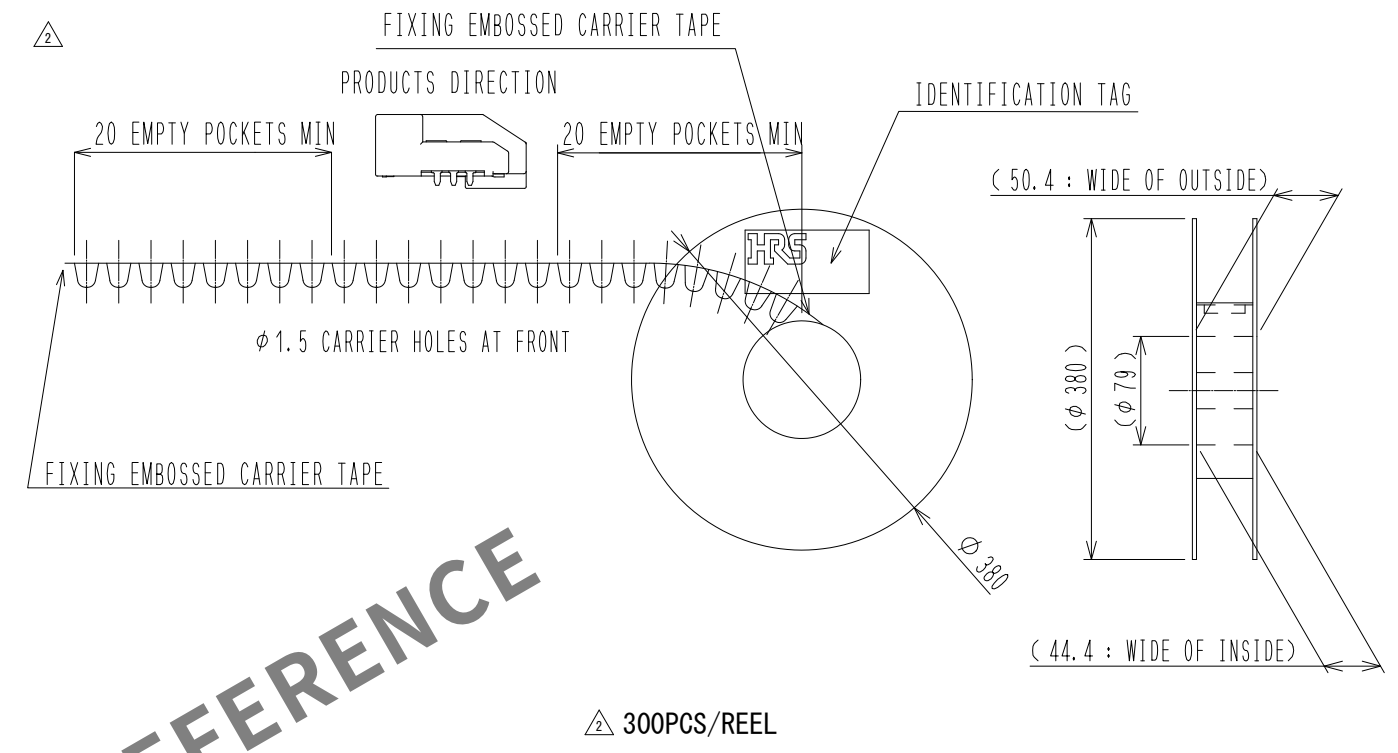


PACKING STYLE DRAWING

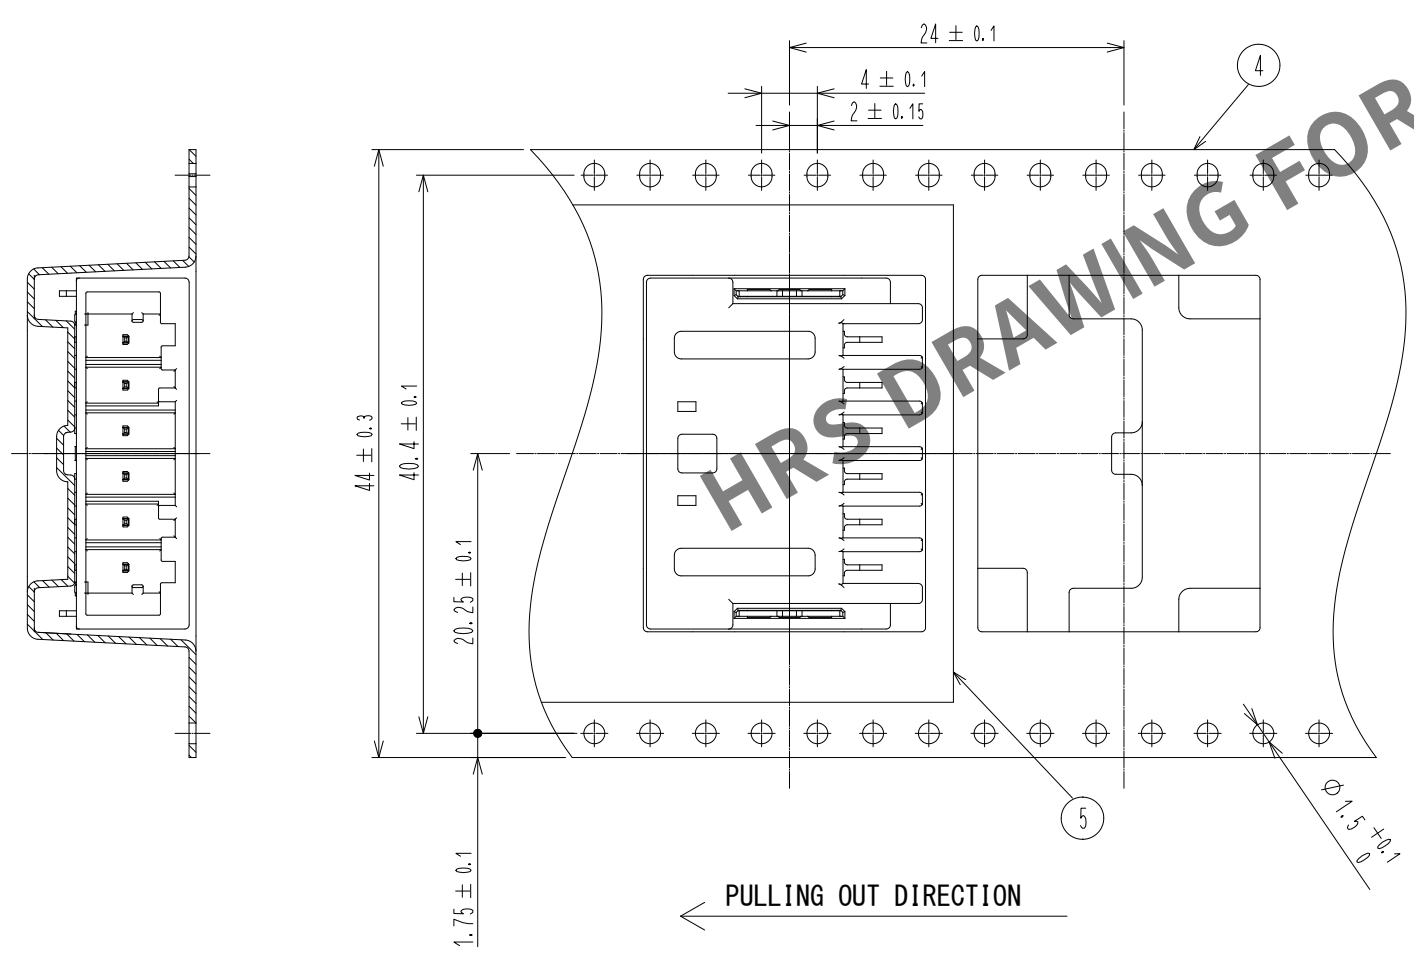

CARDBOARD DIMENSION(FREE)

W=(405) (mm)
D=(405) (mm)
H= (51) (mm)

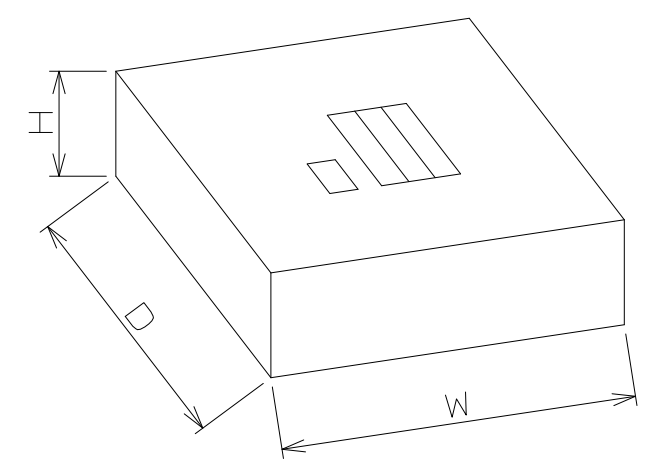

HRS	DRAWING NO.	EDC-404060-00-00		2/2
	PART NO.	ZG05HV-6P-3. 3H (A)		
	CODE NO.	CL0754-2113-0-00		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [Hirose](#) manufacturer:

Other Similar products are found below :

[60993906-B](#) [72.330.1035.1](#) [776880-1](#) [827153-1](#) [9-1326729-8](#) [9-221607-5](#) [12004468](#) [12004475-L](#) [12004483](#) [12033816](#) [12052466](#) [12066163](#)
[12015909](#) [12077753](#) [12047958](#) [12336-12](#) [13579678](#) [13669373](#) [13681974](#) [13688972](#) [13783086](#) [13796274](#) [13843152](#) [13581967](#) [13667961](#)
[13669624](#) [13675513](#) [13946876](#) [13955963](#) [13971791](#) [13979933](#) [13797473](#) [13888202](#) [1428188-1](#) [1437287-3](#) [1428188-2](#) [DS07-19S-5020](#)
[APK-SB25A10L](#) [1452931-2](#) [15317331](#) [15326397](#) [15336198](#) [15435215](#) [15459772](#) [15305306](#) [15345479](#) [15396680](#) [15544350](#) [15482410](#)
[15489904](#)