

acar S8 dual

Surge protective power strip
two groups of socket outlets:

- constantly powered
- powered by a mains switch

3 CONSTANTLY POWERED
SOCKET OUTLETS

5 SOCKETS POWERED
BY A MAINS SWITCH

SOCKET OUTLETS
SAFE FOR CHILDREN

AUTOMATIC
FUSE


SURGE
PROTECTION

ILLUMINATED DOUBLE
POLE MAINS SWITCH

AVAILABLE CABLE
LENGTHS: 1.5m, 3m, 5m

The **acar S8 dual** allows the user to disconnect the power supply to five appliances while maintaining power to the other devices. While maintaining high parameters of surge protection, three socket outlets constantly power connected appliances, while the other five sockets can be easily switched on and off by a mains switch. Thanks to this solution, the user can save energy while still using such appliances as router, set-top box, audio set, etc., which should be constantly powered.

The **acar S8 dual** is applicable both, in the office and at home. Eight socket outlets allow you to protect multiple devices with just one power strip. In addition, the "dual" system can effectively affect the reduction of energy bills.

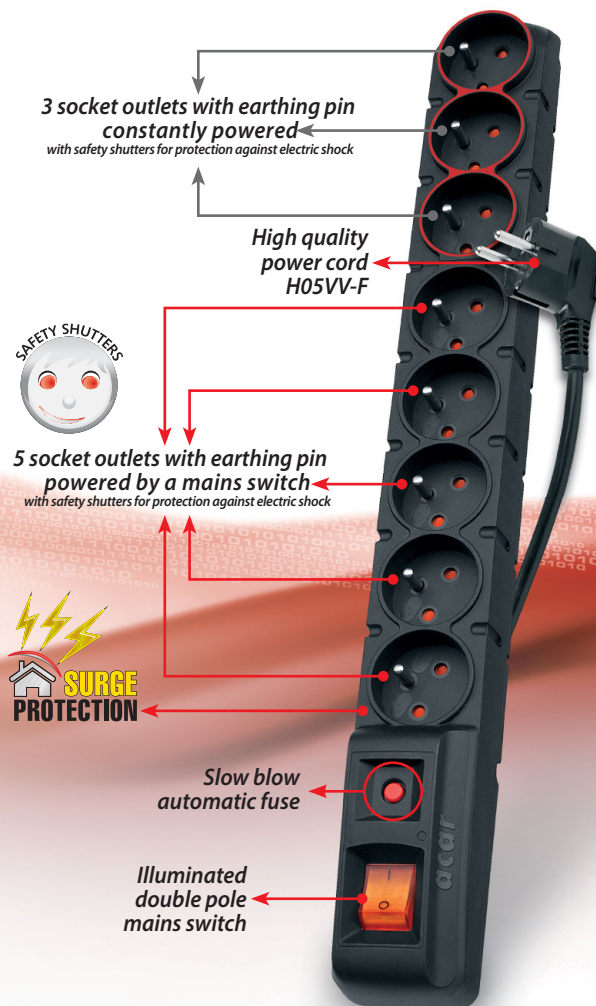

ILLUMINATED DOUBLE
POLE MAINS SWITCH
AND SLOW-BLOW
AUTOMATIC FUSE



3 SOCKET OUTLETS
CONSTANTLY
POWERED, WITH
EARTHING PIN AND
SAFETY SHUTTERS



5 SOCKET OUTLETS
POWERED BY A MAINS
SWITCH, WITH
EARTHING PIN AND
SAFETY SHUTTERS



FOUR POSSIBLE WAYS
OF POWER CABLE
ROUTING AND
OPTIONAL MOUNTING
BRACKETS

Technical data: acar S8 dual

Maximum load	P _{MAX} 2300W
Nominal voltage U _N	230V
Nominal frequency	50Hz
Nominal load current	ΣI _N = 10A MAX
Surge protection response time	<25ns
Maximum voltage U _C	250V 50Hz
Protection level U _p	≤1.3kV
Nominal discharge current i _N	2kA (L/N) – 8/20μs
Maximum discharge current i _{MAX}	6.5kA (L/N) – 8/20μs
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	8 two-pole socket outlets with earthing pin, 10A/250V (5 - powered by a mains switch + 3 - constantly powered)
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	445x54x55mm
Weight	0.48kg

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress.
ATTENTION! The technical data define the maximum values of surges against which the device protects.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [HSK Data](#) ***manufacturer:***

Other Similar products are found below :

[0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#) [CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [71.350.2428.0](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [MMS10801TSV](#) [850-10-006-10-001000](#) [851-87-009-30-136101](#) [FPH-0701G](#) [852-10-016-10-001000](#) [852-10-026-10-001000](#) [856-10-002-40-001000](#)