


N-Ch 60V Fast Switching MOSFETs
Description

The HSL6008 is the high cell density trenched N-ch MOSFETs, which provides excellent RDSON and efficiency for most of the small power switching and load switch applications.

The HSL6008 meet the RoHS and Green Product requirement with full function reliability approved.

Product Summary

| | | |
|-------------------------|-----|----|
| V _{DS} | 60 | V |
| R _{DS(ON),TYP} | 80 | mΩ |
| I _D | 2.8 | A |

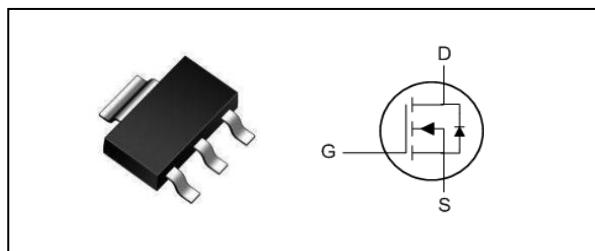SOT223 Pin Configuration


- Green Device Available
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- Advanced high cell density Trench technology

Absolute Maximum Ratings

| Symbol | Parameter | Rating | Units |
|--------------------------------------|--|------------|-------|
| V _{DS} | Drain-Source Voltage | 60 | V |
| V _{GS} | Gate-Source Voltage | ±20 | V |
| I _D @T _A =25°C | Continuous Drain Current, V _{GS} @ 10V ₁ | 2.8 | A |
| I _D @T _A =70°C | Continuous Drain Current, V _{GS} @ 10V ₁ , | 2.3 | A |
| I _{DM} | Pulsed Drain Current ₂ , | 12 | A |
| P _D @T _A =25°C | Total Power Dissipation ₃ | 1.5 | W |
| T _{STG} | Storage Temperature Range | -55 to 150 | °C |
| T _J | Operating Junction Temperature Range | -55 to 150 | °C |

Thermal Data

| Symbol | Parameter | Typ. | Max. | Unit |
|------------------|--|------|------|------|
| R _{θJA} | Thermal Resistance Junction-Ambient ₁ | --- | 85 | °C/W |
| R _{θJC} | Thermal Resistance Junction-Case ₁ | --- | 48 | °C/W |

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|--|---|---|------|-------|-----------|----------------------------|
| BV_{DSS} | Drain-Source Breakdown Voltage | $\text{V}_{\text{GS}}=0\text{V}$, $\text{I}_D=250\mu\text{A}$ | 60 | --- | --- | V |
| $\Delta \text{BV}_{\text{DSS}}/\Delta T_J$ | BV_{DSS} Temperature Coefficient | Reference to 25°C , $\text{I}_D=1\text{mA}$ | --- | 0.054 | --- | $\text{V}/^\circ\text{C}$ |
| $\text{R}_{\text{DS}(\text{ON})}$ | Static Drain-Source On-Resistance ² | $\text{V}_{\text{GS}}=10\text{V}$, $\text{I}_D=2.5\text{A}$ | --- | 80 | 100 | $\text{m}\Omega$ |
| | | $\text{V}_{\text{GS}}=4.5\text{V}$, $\text{I}_D=2\text{A}$ | --- | 85 | 110 | |
| $\text{V}_{\text{GS}(\text{th})}$ | Gate Threshold Voltage | $\text{V}_{\text{GS}}=\text{V}_{\text{DS}}$, $\text{I}_D=250\mu\text{A}$ | 1.2 | --- | 2.5 | V |
| $\Delta \text{V}_{\text{GS}(\text{th})}$ | $\text{V}_{\text{GS}(\text{th})}$ Temperature Coefficient | | --- | -4.96 | --- | $\text{mV}/^\circ\text{C}$ |
| I_{DS} | Drain-Source Leakage Current | $\text{V}_{\text{DS}}=48\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$ | --- | --- | 1 | uA |
| | | $\text{V}_{\text{DS}}=48\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $T_J=55^\circ\text{C}$ | --- | --- | 5 | |
| I_{GSS} | Gate-Source Leakage Current | $\text{V}_{\text{GS}}=\pm 20\text{V}$, $\text{V}_{\text{DS}}=0\text{V}$ | --- | --- | ± 100 | nA |
| g_{fs} | Forward Transconductance | $\text{V}_{\text{DS}}=5\text{V}$, $\text{I}_D=2\text{A}$ | --- | 13 | --- | S |
| Q_g | Total Gate Charge (4.5V) | $\text{V}_{\text{DS}}=48\text{V}$, $\text{V}_{\text{GS}}=4.5\text{V}$, $\text{I}_D=2\text{A}$ | --- | 5 | 7.0 | nC |
| Q_{gs} | Gate-Source Charge | | --- | 1.68 | 2.4 | |
| Q_{gd} | Gate-Drain Charge | | --- | 1.9 | 2.7 | |
| $\text{T}_{\text{d(on)}}$ | Turn-On Delay Time | $\text{V}_{\text{DS}}=30\text{V}$, $\text{V}_{\text{GS}}=10\text{V}$, $\text{R}_G=3.3\Omega$, $\text{I}_D=2\text{A}$ | --- | 1.6 | 3.2 | ns |
| T_r | Rise Time | | --- | 7.2 | 13 | |
| $\text{T}_{\text{d(off)}}$ | Turn-Off Delay Time | | --- | 25 | 50 | |
| T_f | Fall Time | | --- | 14.4 | 28.8 | |
| C_{iss} | Input Capacitance | $\text{V}_{\text{DS}}=15\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$ | --- | 511 | 715 | pF |
| C_{oss} | Output Capacitance | | --- | 38 | 53 | |
| C_{rss} | Reverse Transfer Capacitance | | --- | 25 | 35 | |

Diode Characteristics

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|------------------------|--|--|------|------|------|------|
| I_s | Continuous Source Current ^{1,4} | $\text{V}_G=\text{V}_D=0\text{V}$, Force Current | --- | --- | 2.8 | A |
| I_{SM} | Pulsed Source Current ^{2,4} | | --- | --- | 12 | A |
| V_{SD} | Diode Forward Voltage ² | $\text{V}_{\text{GS}}=0\text{V}$, $\text{I}_s=1\text{A}$, $T_J=25^\circ\text{C}$ | --- | --- | 1.2 | V |
| t_{rr} | Reverse Recovery Time | $\text{I}_F=2\text{A}$, $d\text{I}/dt=100\text{A}/\mu\text{s}$, $T_J=25^\circ\text{C}$ | --- | 9.7 | --- | nS |
| Q_{rr} | Reverse Recovery Charge | | --- | 5.8 | --- | nC |

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The power dissipation is limited by 150°C junction temperature
- 4.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.



Typical Characteristics

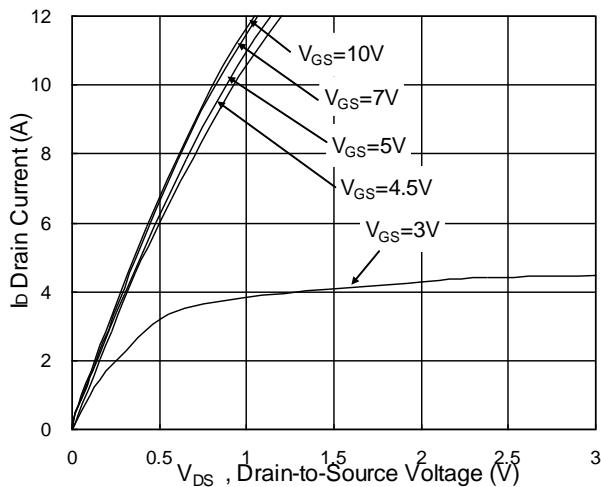


Fig.1 Typical Output Characteristics

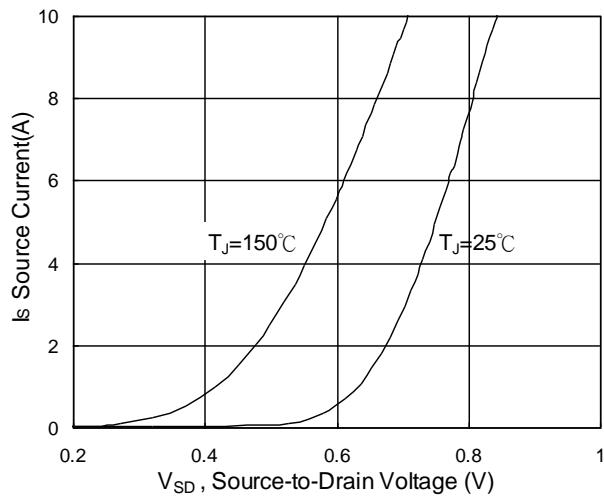


Fig.3 Forward Characteristics of Reverse

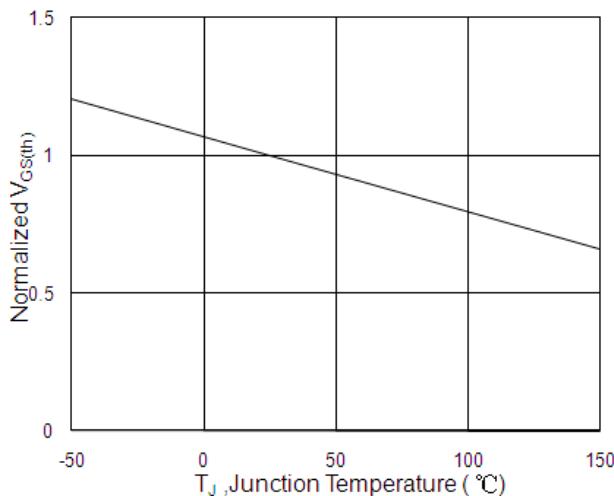


Fig.5 Normalized $V_{GS(th)}$ v.s T_J

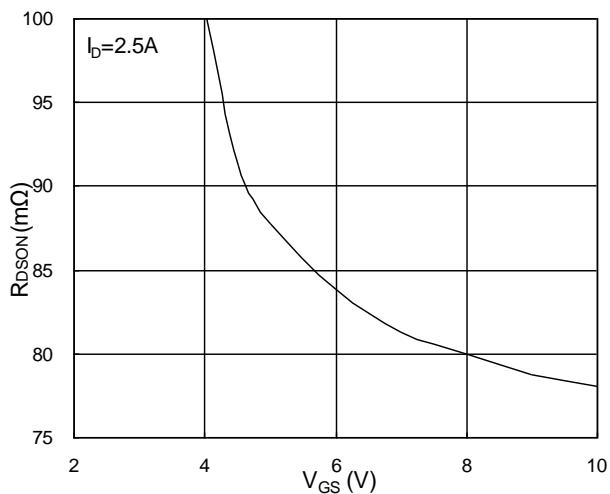


Fig.2 On-Resistance v.s Gate-Source

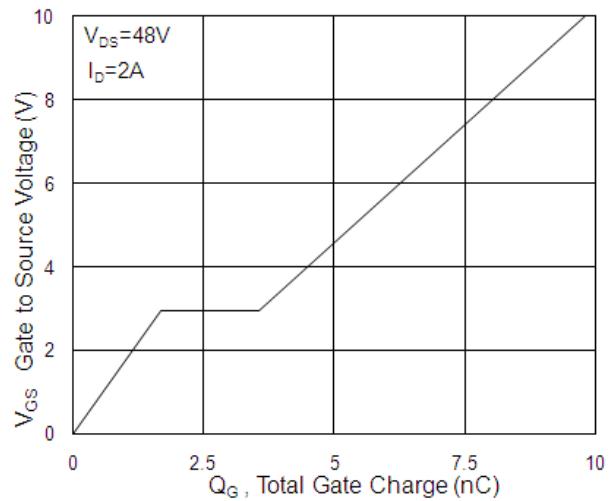


Fig.4 Gate-Charge Characteristics

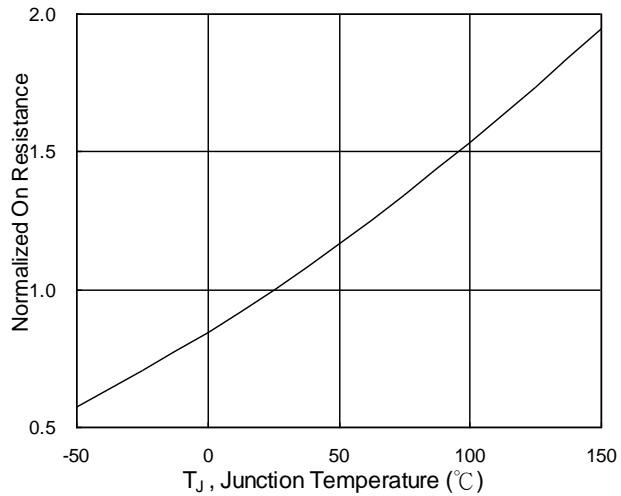


Fig.6 Normalized $R_{DS(on)}$ v.s T_J



N-Ch 60V Fast Switching MOSFETs

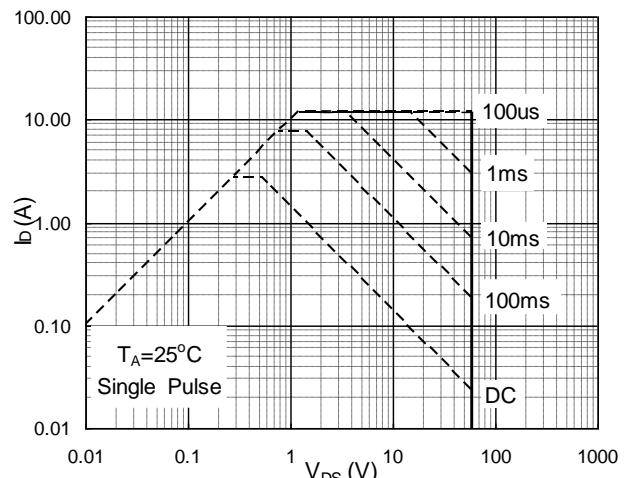
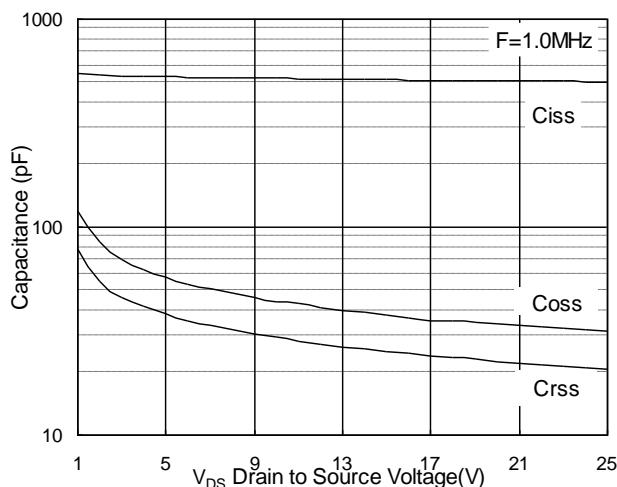


Fig.7 Capacitance

Fig.8 Safe Operating Area

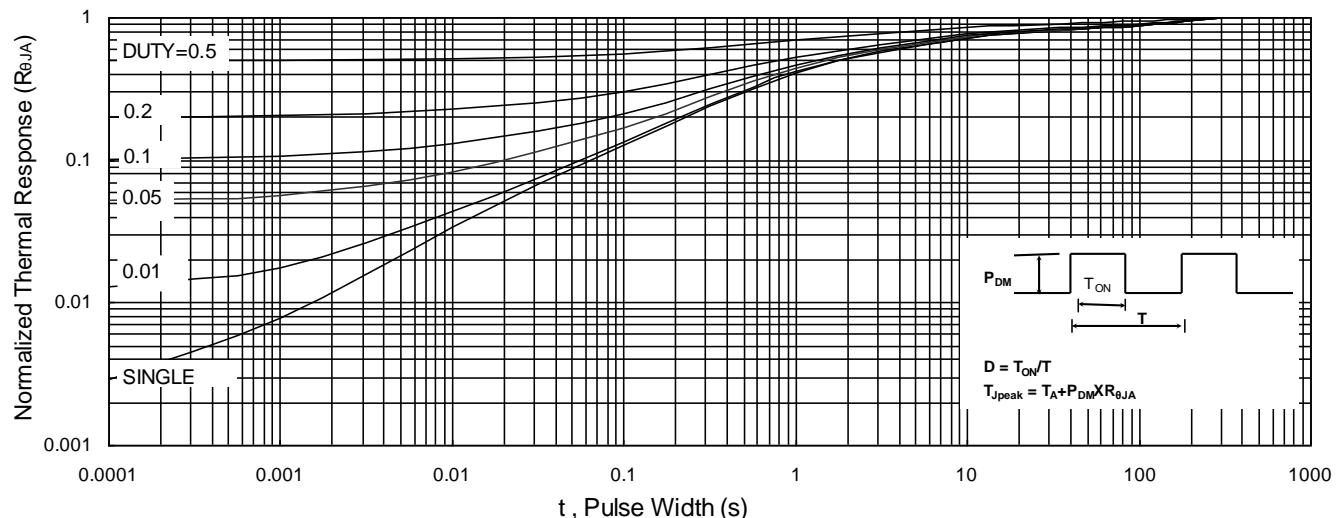


Fig.9 Normalized Maximum Transient Thermal Impedance

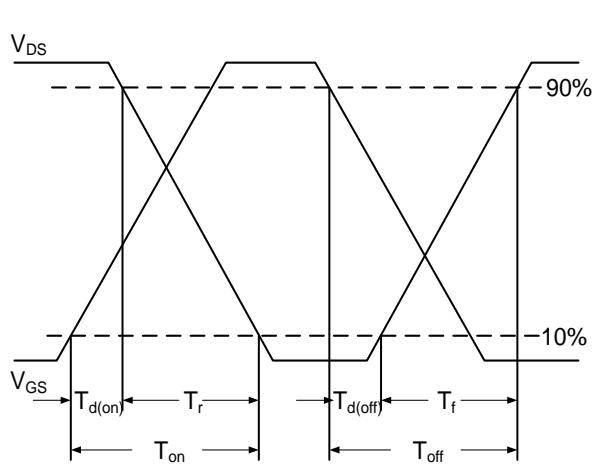


Fig.10 Switching Time Waveform

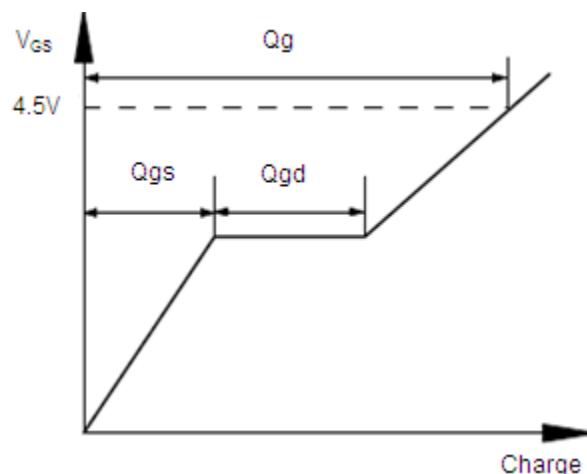


Fig.11 Gate Charge Waveform

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by HUASHUO manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)