

"High Frequency Ceramic Solutions"

Mini Passive RF Diplexer 2.4/5.4GHz for 802.11-WLAN-WiFi

P/N 2450DP14G5400

EIA 0603 with LPF/BPF Filtering Scheme


Detail Specification: 5/17/2017

Page 1 of 3

Not exactly what you are looking for and want to see our other diplexers? Go to: www.johansontechnology.com/diplexers

General Specifications

Part Number	2450DP14G5400	
Passband (MHz)	2400~2500	4900~5950
Insertion Loss (dB)	0.58dB typ. (0.75 max.)	0.8 typ. (1.1 max.)
Attenuation I (db)	25 min. @ 4.8-5.0 GHz	20 min. @ 1.8-2.5 GHz
Attenuation II (db)	20 min. @ 7.2-7.5GHz	15 min. @ 9.8-11.9GHz
Return Loss	9.5 dB min.	9.5 dB min.
Power Capacity	2W max. (CW)	
Storage Period	18 months max.	
Reel Quantity	4,000	

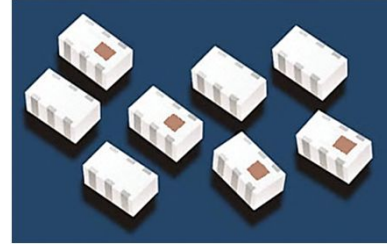

Operating Temp.	-40 to +85 °C
Storage Temp.	-40 to +85 °C

Mechanical Dimensions

	In	mm	
L	0.063 ± 0.004	1.6 ± 0.1	
W	0.031 ± 0.004	0.8 ± 0.1	
T	0.024 ± 0.004	0.6 ± 0.1	
a	0.008 ± 0.004	0.2 ± 0.1	
b	0.008 ± 0.004/0.006	0.2 ± 0.1/0.15	
c	0.006 ± 0.004	0.15 ± 0.1	
g	0.012 ± 0.004	0.3 ± 0.1	
p	0.020 ± 0.002	0.5 ± 0.05	

Terminal Configuration


No.	Function	No.	Function
1	Low Freq (2.45GHz) Band	4	GND
2	GND	5	Common Port
3	High Freq (5.4GHz) Band	6	GND

Part Number Explanation


P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 2450DP14G5400S
		T & R	Suffix = T	eg. 2450DP14G5400T
	Termination style	100% Tin	Suffix = None	eg. 2450DP14G5400(T or S)
	Evaluation Board	2450DP14G5400-EB1SMA		

Would you like the layout file for component? Please send us as message at: www.johansontechnology.com/ask-a-question

Mounting Considerations

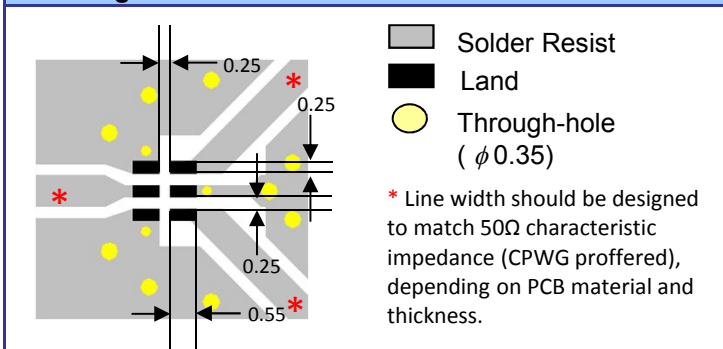

Measuring Diagram

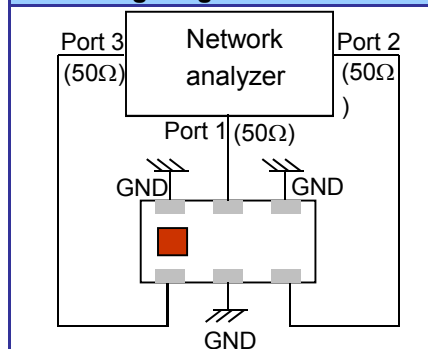

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.1

2017 Johanson Technology, Inc. All Rights Reserved

www.johansontechnology.com

"High Frequency Ceramic Solutions"

Mini Passive RF Diplexer 2.4/5.4GHz for 802.11-WLAN-WiFi


P/N 2450DP14G5400

EIA 0603 with LPF/BPF Filtering Scheme

Detail Specification: 5/17/2017

Page 2 of 3

Typical Electrical Characteristics (T=25 °C)

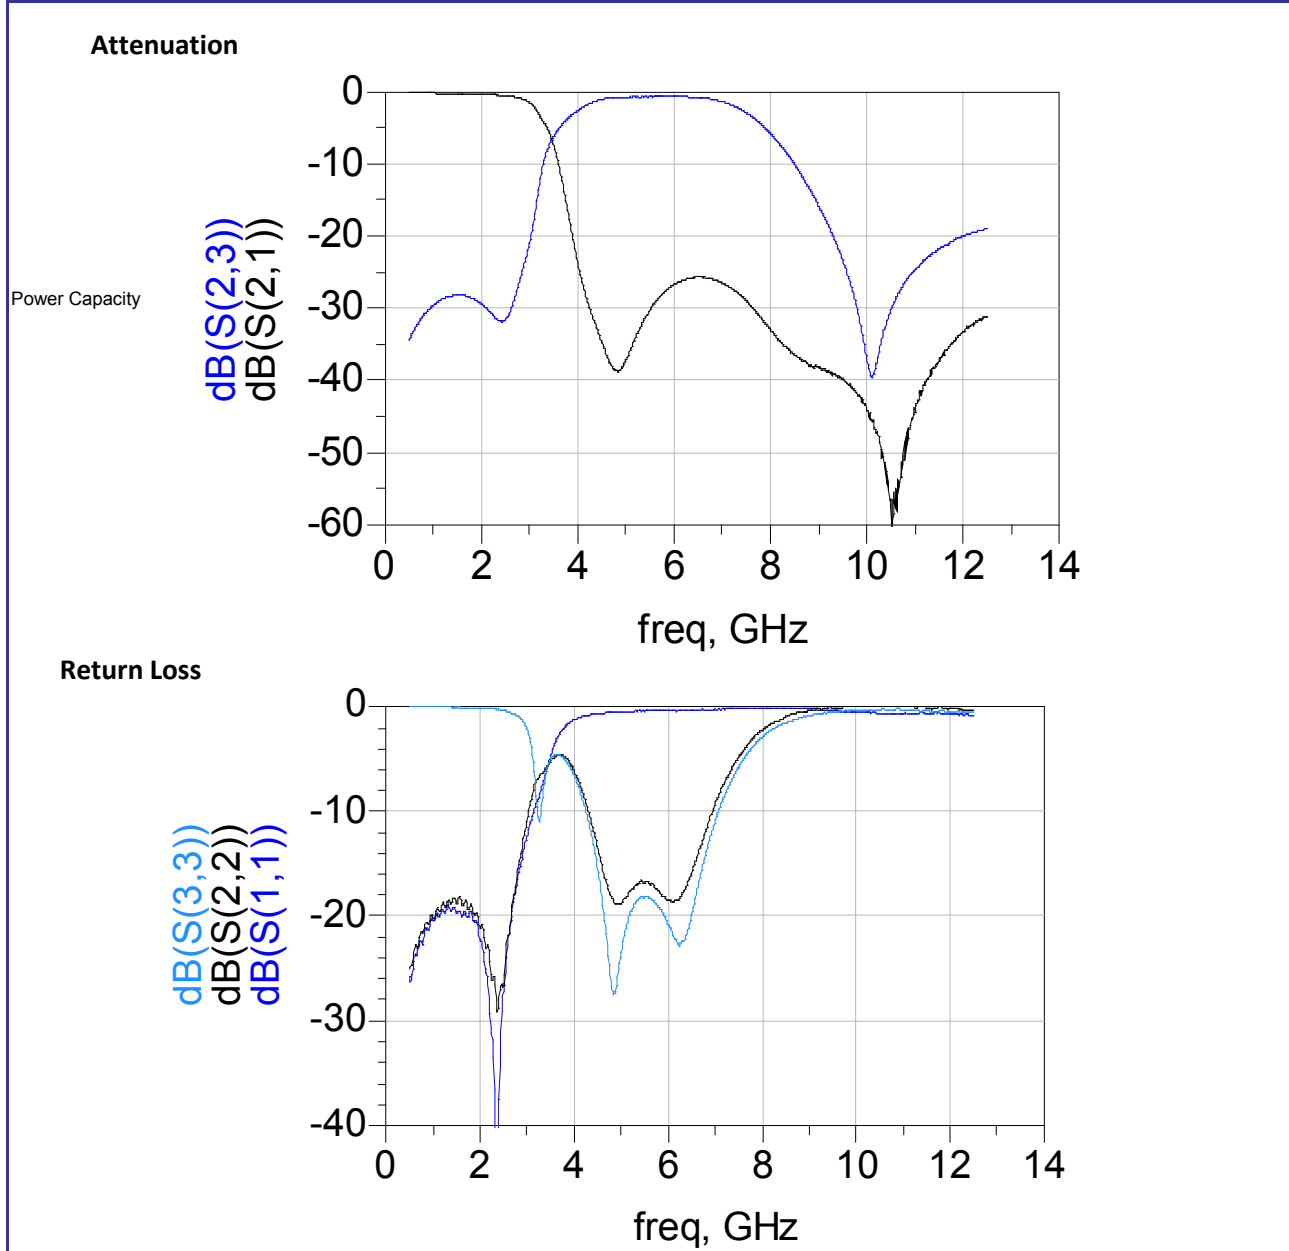

The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)