


SCM Series

SMD Common Mode Inductor

Size 7060






FEATURES

- Chip common mode filter for large current applications.
- Low profile design makes it optimal for surface mounting.
- Operating temperature -40~+125 °C
- Quantity: 1500PCS


APPLICATIONS

- Power line noise countermeasure for various electronic equipment
- Noise countermeasure for adapter lines and battery lines or larger electronic equipment such as note PCs and word processors


Dimensions: [mm]



Schematic:



Land Pattern: [mm]












Electrical Properties:





Part No	Impedance @ 100 MHz Min. (Ω)	Impedance @ 100 MHz Typ. (Ω)	DC Resistance Max. (mΩ)	Rated Current Max. (A)	Rated Volt Max. (V)	IR Min. (MΩ)
SCM7060-700Y	40	70	5	15	125	10
SCM7060-141Y	100	140	10	9.0	125	10
SCM7060-301Y	225	300	10	5.0	125	10
SCM7060-351Y	275	350	10	5.0	125	10
SCM7060-501Y	400	500	10	5.0	125	10
SCM7060-601Y	500	600	15	4.0	125	10
SCM7060-701Y	500	700	15	4.0	125	10
SCM7060-102Y	800	1000	17	3.0	125	10
SCM7060-132Y	910	1300	21	2.5	125	10
SCM7060-222Y	1400	2200	63	1.2	125	10
SCM7060-272Y	2000	2700	63	1.0	125	10

Part No	Impedance @ 100 MHz Min. (Ω)	Impedance @ 100 MHz Typ. (Ω)	DC Resistance Max. (mΩ)	Rated Current Max. (A)	Rated Volt Max. (V)	IR Min. (MΩ)
SCM7060-302Y	2500	3000	75	0.9	125	10
SCM7060-402Y	3300	4000	100	0.8	125	10

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

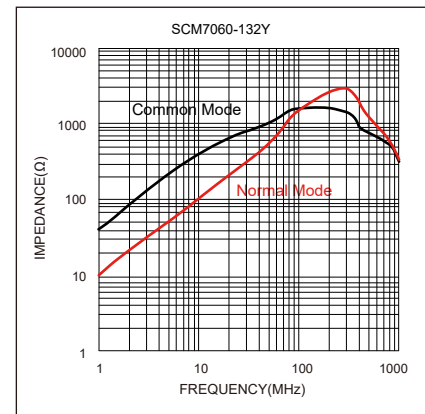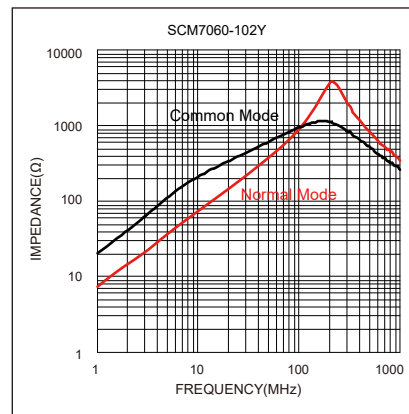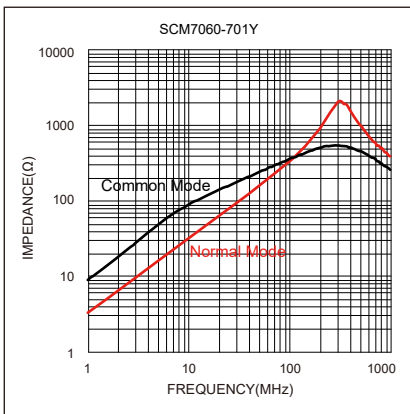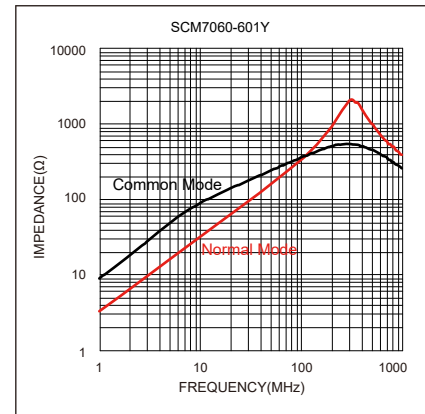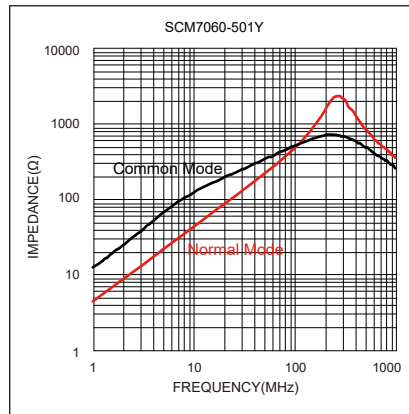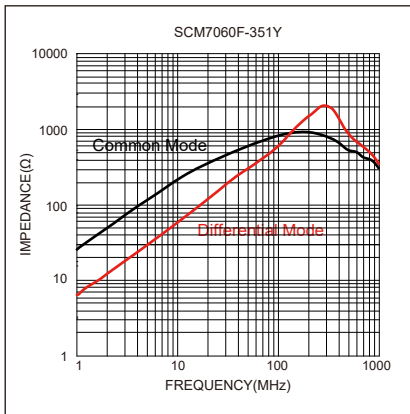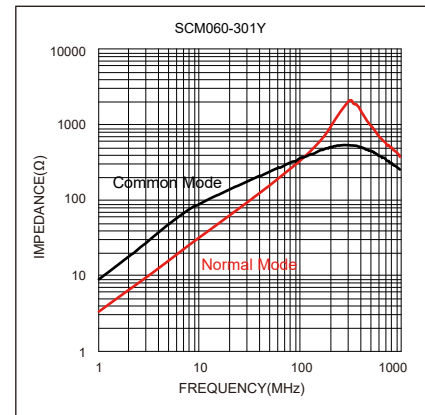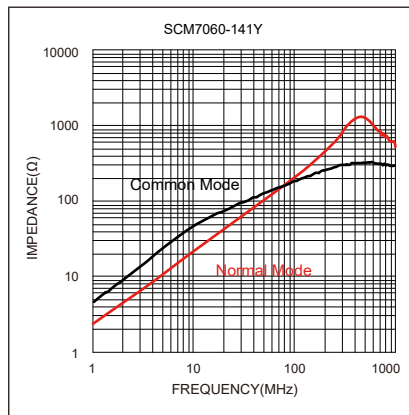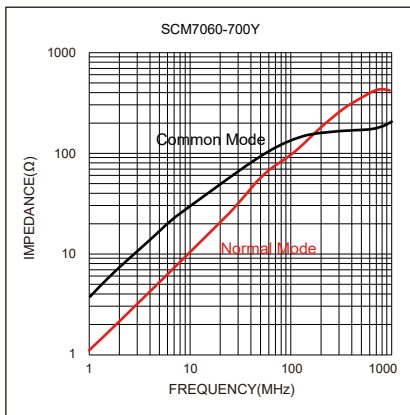

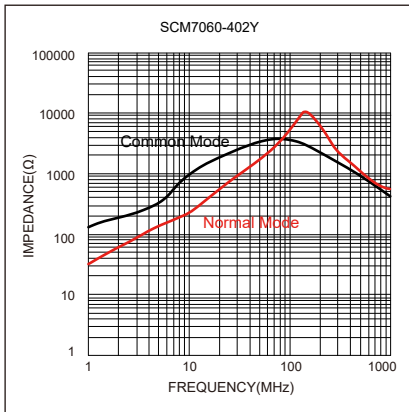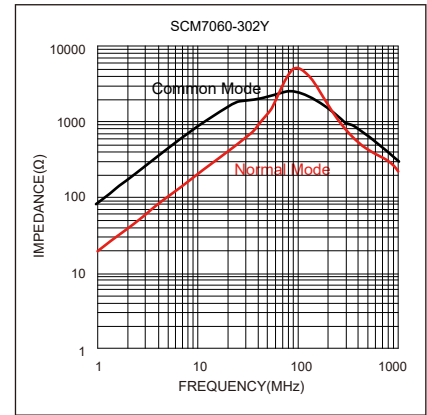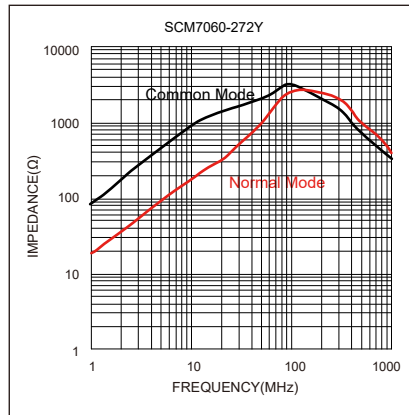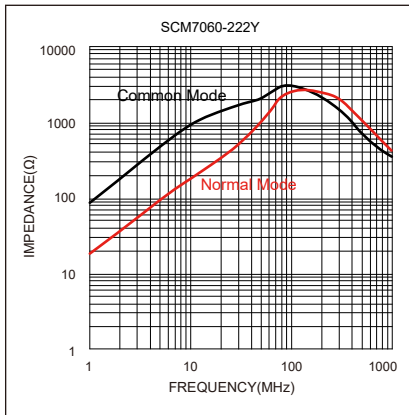

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) ***category:***

Click to view products by [KOHER](#) ***manufacturer:***

Other Similar products are found below :

[PE-64683](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [UAL21VR0802000](#) [UALSC023000000](#)
[UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#)
[PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PE-67531](#) [2752041447](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#)
[FE2X10-4-2NL](#) [T8003NLT](#) [CTX66-19521-R](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#) [4534-3](#)
[PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.104NLT](#) [B82723A2102N001](#) [CUW43T-513T-AU](#) [CUW43T-104T-AU](#) [SCM9250-400N](#)
[SCM9250-510N](#) [FA010G00](#) [GA021G00](#) [GA030G00](#) [MA020G00](#) [QA021G00](#) [APPM00070638301XY0](#) [APPM00070638501XY0](#)
[AWCU00321619222M02](#) [FA040G00](#) [PAC6034.205NLT](#)