

6

5

4


3

2

1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	C	UPDATED PER ECO-14731	07/11/2025	BZHANG	GUTTADAURO

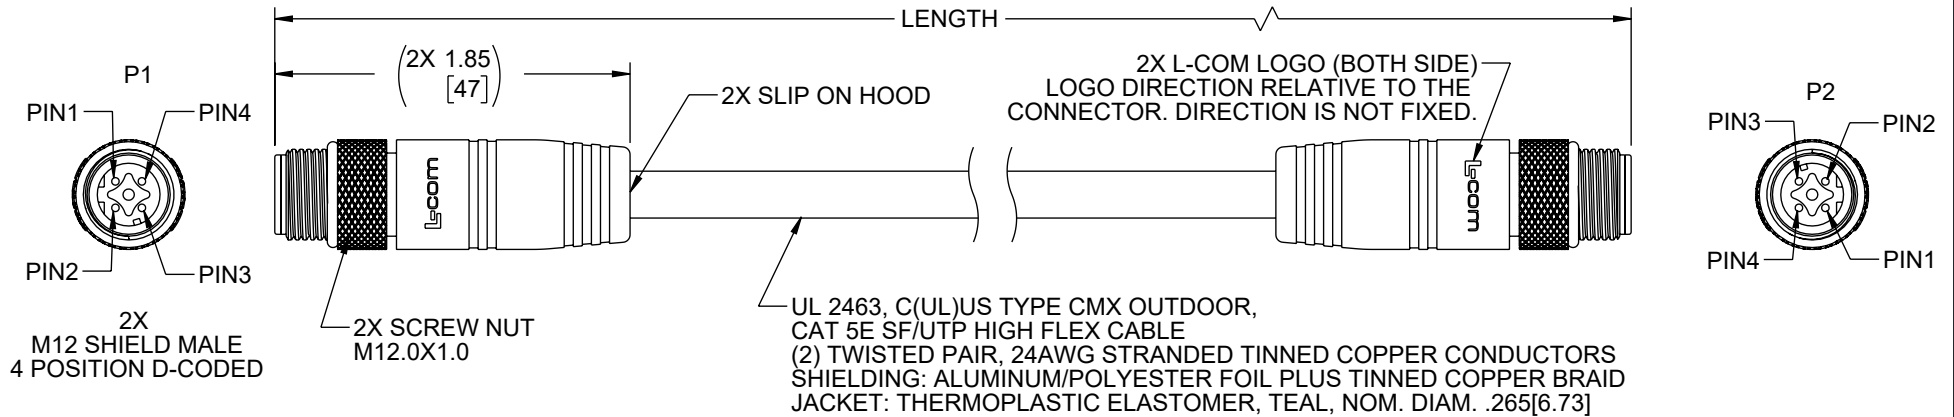

NOTES

MATERIAL:
SLIP ON HOOD: THERMOPLASTIC POLYURETHANE, BLACK
INSULATOR: NYLON, BLACK
SHELL/SCREW NUT: BRASS, NICKEL PLATE
CONTACTS: PHOSPHOR BRONZE, 15µ" MIN. GOLD PLATE


ELECTRICAL:
NOMINAL VOLTAGE RATING: 250 VAC/VDC
MAX CURRENT: 4A

APPLICATION:
INGRESS PROTECTION RATING IS IP68 (MATED).

ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE: -40°C TO +80°C
CABLE JACKET: OIL, SUNLIGHT AND WELD SPLATTER RESISTANT
CABLE FLEX LIFE: 1 MILLION CYCLE TEST (10X CABLE OD)
10 MILLION CYCLE TEST (20X CABLE OD)

MISCELLANEOUS
CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

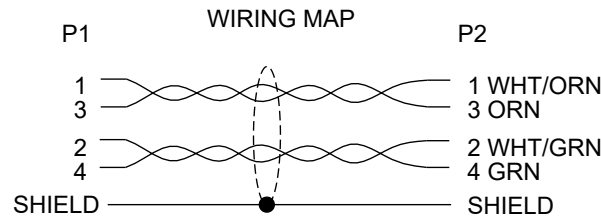

PART NUMBER	LENGTH	
	FEET	METERS
TRG501-T4T-05M	1.64	0.5
TRG501-T4T-1M	3.28	1.0
TRG501-T4T-2M	6.56	2.0
TRG501-T4T-3M	9.84	3.0
TRG501-T4T-5M	16.41	5.0
TRG501-T4T-10M	32.82	10.0
TRG501-T4T-15M	49.22	15.0

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
X = ±.2 [5]
.XX = ±.02 [0.5]
.XXX = ±.005 [0.13]
FRACTIONS
± 1/32
ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

L-com
an INFINIT® brand

Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE
NONE
SHEET
1 OF 1

DESCRIPTION
CATEGORY 5e M12 IP68 4 POSITION D CODE DOUBLE
SHIELDED SF/UTP INDUSTRIAL OUTDOOR HIGH FLEX CABLE,
M12 M TO M12 M, CMX TPE, TEAL

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	D.CUI	TRG501-T4T	C

6

5

4

3

2

1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) ***category:***

Click to view products by [L-Com](#) ***manufacturer:***

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1-1997459-2](#) [1-1997459-3](#) [ASP-144414-04](#) [E16A06002M030](#) [18169-0524](#) [1969343-6](#)
[C5UMB3FBG](#) [21949-1](#) [360031](#) [AX100351](#) [09459711142](#) [73-7793-1](#) [WHU18-1836-060](#) [1-3636-620-5214](#) [STS](#) [09470303023](#) [09459711118](#)
[1404682](#) [C5SMB14FBG](#) [CA21116001](#) [WK-100](#) [UTPCH22VLY](#) [UTPSP50BLY](#) [C6F1106003](#) [UTPSP16MRDY](#) [UTPSP16MGRY](#)
[UTP28CH30MBL](#) [AX105520](#) [CAPFCU-B25](#) [CB8MMBK-B100](#) [DK-1511-002/B](#) [STP6X1BU](#) [904873-000](#) [17-103134](#) [1110401155](#)
[09459711186](#) [EL6614](#) [MRC191ZN79H1](#) [SSFPP-P03M0-2](#) [1426514](#) [1413684](#) [1426515](#) [1414043](#) [1413685](#) [7000-44511-6590150](#) [7000-](#)
[44511-7940300](#) [7000-44561-7940150](#)